DCK

NEW

POWERED BY LI-ION TECHNOLOGY

4V Li-ion NEW



SMALL AND COMPACT BODY

Easy to use and carry



DOUBLE LED LIGHTING

Easy to operate in dark areas

FORWARD AND REVERSE ROTATION BUTTON SWITCH

Convenient to switch



RUBBER-COVERED HANDLE

Comfortable to grip



3-GEAR TORQUE ADJUSTMENT AND 50MM BIT SET

Meet various applications

TYPE C UNIVERSAL CHARGING INTERFACE

Light-weight and compact

KDPL04-5

(TYPE E)

CORDLESS BRUSHLESS BLOWER

Battery	4V/2.0Ah
No-load Speed	300r/min
Max. Torque	5N.m
Clamping Capacity	6.35mm Hex
Max. Screw Dia.	5mm
Torque Setting	3 (1-2-3)
Net Weight	0.29kg

DCK

NEW

ECONOMICAL MODEL




4V/4.4AH LARGE CAPACITY BATTERY

Longer continuous runtime

HIGH BRIGHTNESS GREEN LIGHT

For better visibility

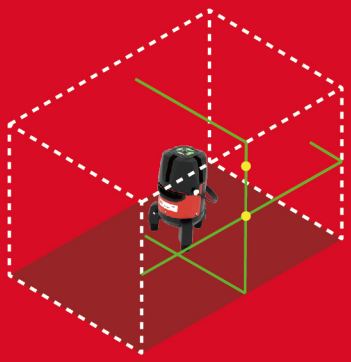

HIGH ACCURACY OF ±1MM AT 5M

Vertical line : 1
Horizontal line : 1
Highlight point : 2

360° THICKENED ROTATING BASE WITH FINE VERTICAL LINE ADJUSTMENT FUNCTION



Precise and durable

KFF08-11

GREEN LASER LEVEL

Power Supply	4V/4.4Ah
Laser Diode	512nm
Vertical Accuracy	5m±1mm
Leveling Accuracy	5m±1mm
Auto-leveling Range	±3°
Leveling Range	≥120°
Vertical Range	≥120°
Width of Laser Line	2.5mm ar distance of 5m
Operating Temperature	-10°C—40°C
Laser Class	3R

DCK

NEW

ECONOMICAL MODEL




4V/4.4AH LARGE CAPACITY BATTERY

Longer continuous runtime

HIGH BRIGHTNESS GREEN LIGHT

For better visibility

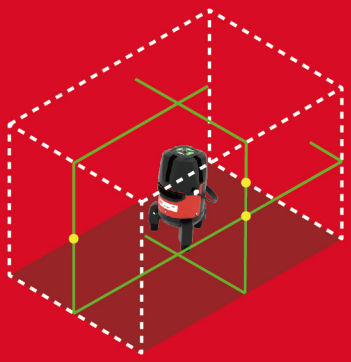

HIGH ACCURACY OF ±1MM AT 5M

Vertical line : 2
Horizontal line : 1
Highlight point : 3

360° THICKENED ROTATING BASE WITH FINE VERTICAL LINE ADJUSTMENT FUNCTION



Precise and durable

KFF08-21

GREEN LASER LEVEL

Power Supply	4V/4.4Ah
Laser Diode	512nm
Centering Laser Diode	650nm
Vertical Accuracy	5m±1mm
Leveling Accuracy	5m±1mm
Auto-leveling Range	±3°
Leveling Range	≥120°
Vertical Range	≥120°
Width of Laser Line	2.5mm ar distance of 5m
Operating Temperature	-10°C—40°C
Laser Class	3R

DCK

NEW

ECONOMICAL MODEL




4V/4.4AH LARGE CAPACITY BATTERY

Longer continuous runtime

HIGH BRIGHTNESS GREEN LIGHT

For better visibility

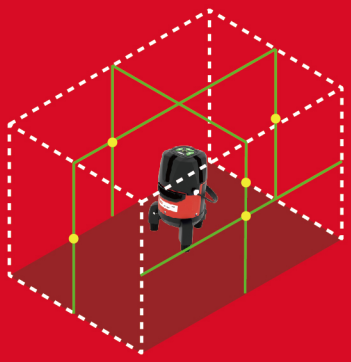

HIGH ACCURACY OF ±1MM AT 5M

Vertical line : 4
Horizontal line : 1
Highlight point : 5

360° THICKENED ROTATING BASE WITH FINE VERTICAL LINE ADJUSTMENT FUNCTION



Precise and durable

KFF08-41

GREEN LASER LEVEL

Power Supply	4V/4.4Ah
Laser Diode	512nm
Centering Laser Diode	650nm
Vertical Accuracy	5m±1mm
Leveling Accuracy	5m±1mm
Auto-leveling Range	±3°
Leveling Range	≥120°
Vertical Range	≥120°
Width of Laser Line	2.5mm ar distance of 5m
Operating Temperature	-10°C—40°C
Laser Class	3R


DCK

NEW

600W HIGH POWER

STEPLESS SPEED ADJUSTMENT

Meet different working requirement



AUTO STOP CARBON BRUSH HOLDER

Effective protection for the motor



HIGH STRENGTH GEARS

Longer service life



ERGONOMIC BODY DESIGN

Light-weight and compact structure for a comfortable grip

Powerful, Light-weight and compact

KJZ05-10B/BK

BK : keyless chuck
ELECTRIC DRILL

Rated Power Input		600W
No-load Speed		0-3000r/min
Max. Drilling Capacity	Steel	Φ10mm
	Wood	Φ25mm
Net Weight		1.3kg

DCK

NEW

1050W SUPER POWER AND
950N.M SUPER TORQUE OUTPUT



EXTENDED OUTPUT SHAFT

Easy to operate in narrow space



I ROCKER TYPE REVERSING SWITCH

METAL GEAR BOX

Robust and durable



D-SHAPE AUXILIARY HANDLE

Rotates 360° for operator
convenience



Powerful and durable


KPB32

ELECTRIC WRENCH

Rated Power Iuput	1050W
No-load Speed	1400r/min
Rated Impact Frequency	1500/min
Capacities (Bolt Size)	M22-M30mm
Square Drive	25.4×25.4mm
Max. Fastening Torque	400-950N.m
Net Weight	10.3kg

DCK

NEW



OPTIMIZED DESIGN OF INLET AND OUTLET PARTS

Greater suction to deal with sticky coating



NEW HAND-ROTARY ON-OFF STRUCTURE

With faster reflux

COPPER INDUCTION MOTOR WITH OVERLOAD PROTECTION

Effectively protect the motor



DETACHABLE BRACKET HANDRAIL

Easy to carry



Economical and durable

KPWG02-3.0

HIGH-PRESSURE SPRAYING UNIT

Rated Power Input	1300W
No-load Speed	1440r/min
Max. Operating Pressure	2500psi
Max. Spray Flow	3.0L/min
Net Weight	31.2kg

DCK

55 SECONDS

NEW

COPPER INDUCTION MOTOR WITH OVERLOAD PROTECTION

Effectively protect the motor

FAST CHARGING SPEED

Less than 55 seconds of inflating time

POWER-OFF PROTECTION

Safe and reliable



OIL-FREE

Convenient operation

Powerful and efficient

KQE1500X2/50

DOUBLE-TUBE OIL-FREE AIR COMPRESSOR

Rated Power Input	1500W x 2
Working Pressure	7Bar
Rated Speed	2850r/min
Capacity	50L
Displacement	200L/min
Net Weight	37.5kg

DCK

NEW



SMALL SIZE

Suitable for home use



EQUIPPED WITH A VARIETY OF BRUSH ASSEMBLIES

Match various applications



18KPA MAX. VACUUM PRESSURE

Strong suction power



WATERPROOF LEVEL: IPX4

Small but efficient


KVC12

VACUUM CLEANER

Rated Power Iuput	1200W
Capacity	12L
Max. Vacuum Pressure	18kPa
Max. Air Volume	26L/s
Cooling System	Recycle
Net Weight	4.0kg

DCK

NEW



2-MODE OPERATION

Rotary hammer and demolition



NEW SAFETY RELEASE CLUTCH

Effectively protect the safety of operators

MULTIPLE VIBRATION ABSORBING SYSTEM

Effectively reduce operator fatigue



LARGE TRIGGER SWITCH

Good balance between efficiency and safety

KZC03-28

ELECTRIC ROTARY HAMMER

Rated Power Iuput		1100W
No-load Speed		1300r/min
Rated Impact Frequency		5000/min
Max. Drilling Capacity	Concrete	Φ28mm
Net Weight		5.0kg

DCK

NEW

710W HIGH POWER



TWO FUNCTIONS

Drill and Impact Drill



STEPLESS SPEED ADJUSTMENT

Meet different working requirement

RUBBER-COVERED HANDLE

Comfortable to grip

WITH A VARIETY OF HAND TOOLS AND ACCESSORIES

Meet various applications



Practical combo kit

KZJ16T

ELECTRIC IMPACT DRILL (TOOL KIT)

Rated Power Input		710W
No-load Speed		0-3000r/min
Rated Impact Frequency		0-45000/min
Max.Drilling Capacity	Steel	Φ13mm
	Concrete	Φ16mm
	Wood	Φ30mm

DCK

NEW

ECONOMICAL MODEL

DUAL-USE, HANDHELD AND VERTICAL TYPE

ADJUSTABLE SPEED

For easier operation



SAFETY CLUTCH DESIGN

Effectively protect the safety of operators

NO WATER SEAL STRUCTURE

More durable

Economical and durable

KZZ168

DIAMOND DRILL WITH WATER SOURCE

Rated Power Input		2000W
No-load Speed		0-1920r/min
Max. Drilling Capacity	Concrete	Φ102mm
	Brick wall	Φ168mm
Net Weight		5.8kg