DCK

NEW

BACKPACKING TYPE
lightweight design

4-STROKE AIR COOLING
more powerful



LOW FUEL CONSUMPTION
more fuel-efficient

STABLE PERFORMANCE

EFFICIENT COOLING SYSTEM
long sustainable working hours

LOW NOISE AND VIBRATION

Multi-function powerful and efficient

K02BG431
PETROL BRUSH CUTTER

Displacement	31mL
Power	4-Stroke Air Cooling
Max. Power & Speed	0.7kW/6500r/min
Net Weight	11kg

DCK

NEW

SIDE MOUNTED TYPE


lightweight design

1.25kW

more powerful

LOW FUEL CONSUMPTION

more fuel-efficient

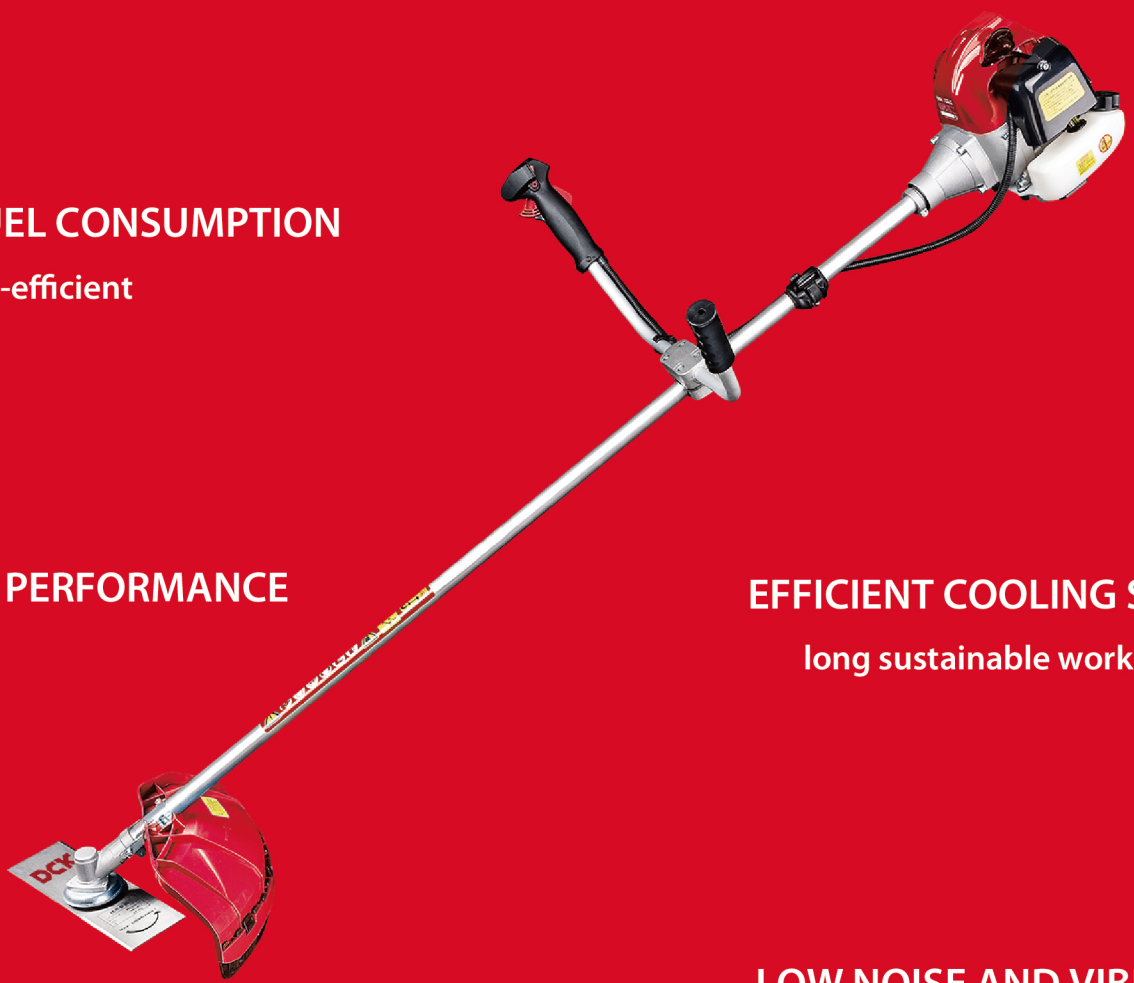

STABLE PERFORMANCE

EFFICIENT COOLING SYSTEM

long sustainable working hours

LOW NOISE AND VIBRATION

Portabl efficient and durable

K02CXB1.25KW

PETROL BRUSH CUTTER

Displacement	42.7mL
Power	2-Stroke Air Cooling
Max. Power & Speed	1.25kW/7000r/min
Net Weight	7.9kg

DCK

NEW

SINGLE-EDGED

reinforced, thickened
and lengthened blade design

HEIGHTENING GUIDE BAR DESIGN

effectively collect broken branches



HIGH QUALITY CARBURETOR

stable quality

Strong power efficient and durable

K03GJB0.7KW

PETROL HEDGE TRIMMER

Displacement	22.5mL
Cutting Width	600mm
Power	2-Stroke Air Cooling
Blade Type	Single-edge Tooth
Max. Power & Speed	0.7kW/7500r/min
Net Weight	6.0kg

DCK

POWERED BY LI-ION TECHNOLOGY

NEW

ECONOMICAL MODEL

10.8V new battery pack platform

35N.m

high torque output



18+1 TORQUE SETTING

multi-function

RUBBER-COVERED HANDLE

anti-vibration and anti-slip,
comfortable for gripping

2-SPEED

meet different
working requirements

Economical and durable powerful and efficient

KDJZ1202

(TYPE E)

CORDLESS DRIVER DRILL

Battery		10.8V/2.0Ah×2
Max. Chucking Capacity		10mm
No-load Speed	Low	0-400r/min
	High	0-1500r/min
Max. Drilling Dia.	Steel	Φ10mm
	Wood	Φ22mm
Torque Setting		18+1
Max. Torque		35N.m
Net Weight		1.0kg

DCK

POWERED BY LI-ION TECHNOLOGY

NEW

AUTOMATIC LEVEL ALERT FUNCTION

out-of-range ±3° laser automatic flashing and chirping prompt

KEY SWITCH + WIRELESS REMOTE CONTROL

easy for using in high and narrow areas



BEVEL LINE MODE

suitable for stair installation and other applications

GREEN LIGHT

suitable for indoor or outdoor using

LD LIGHT SOURCE

high stability

LARGE CAPACITY LITHIUM BATTERY

Long service time

FINE-TUNING BASE

HANGING WALL BRACKET

meet different working requirements

LIFTING FRAME

up and down about 80mm

Accurate stable and durable

KFF02-12L

RECHARGEABLE GREEN LASER LEVEL

Power Supply	4400mAh 4V Li-Ion battery
Laser Diode	515nm
Accuracy	±0.3mm/m
Auto-leveling Range	±3°
Width of Laser Line	4mm at distance of 10m
Operating Temperature	-10~40℃
Ruming Time (Full Light Normal Mode)	~6h
Net Weight	0.6kg

DCK

POWERED BY Li-ION TECHNOLOGY

NEW

AUTOMATIC LEVEL ALERT FUNCTION

out-of-range ±3° laser automatic flashing and chirping prompt

KEY SWITCH + WIRELESS REMOTE CONTROL

easy for using in high and narrow areas



BEVEL LINE MODE

suitable for stair installation and other applications

GREEN LIGHT

suitable for indoor or outdoor using

LD LIGHT SOURCE

high stability

LARGE CAPACITY LITHIUM BATTERY

Long service time

FINE-TUNING BASE

HANGING WALL BRACKET

meet different working requirements

LIFTING FRAME

up and down about 80mm

Accurate stable and durable

KFF12L

RECHARGEABLE GREEN LASER LEVEL

Power Supply	4400mAh 4V Li-Ion battery
Laser Diode	515nm
Accuracy	±0.3mm/m
Auto-leveling Range	±3°
Width of Laser Line	4mm at distance of 10m
Operating Temperature	-10~40℃
Ruming Time (Full Light Normal Mode)	~6h
Net Weight	0.61kg

DCK

NEW

2200W HIGH POWER

high efficiency cutting

ALUMINUM HOUSING

higher stability

REINFORCED GEAR DESIGN

more durable and reliable



0 - 45° MITER CUTTING ANGLE

meet different cutting requirements

Powerful motor high efficiency cutting

KJG02-355S

ELECTRIC CUT-OFF MACHINE

Rated Power Input	2200W
Wheel Size	355x3x25.4mm
Miter Cutting Angle	0-45°
No-load Speed	3800r/min
Max.Cutting Capacity	
Round Bar	65mm
Pipe	120mm
Profiled Bar	120x130mm
Net Weight	16.0kg

DCK

NEW

2200W HIGH POWER

high efficiency cutting

ALUMINUM HOUSING

higher stability

REINFORCED GEAR DESIGN

more durable and reliable

THICKENED AND WIDENED BASE DESIGN

more stable cutting

0 - 45° MITER CUTTING ANGLE

meet different cutting requirements



Powerful motor high efficiency cutting

KJG04-355S/ KJG04-355BS

ELECTRIC CUT-OFF MACHINE

Rated Power Input	2200W
No-load Speed	3800r/min
Miter Cutting Angle	0-45°
Max.Cutting Capacity	
Pipe	100mm
Profiled Bar	120x130/95x120mm
Wheel Size	355x3x25.4mm
Net Weight	15.6kg / 18.2kg

DCK


NEW

BELT DRIVE STRUCTURE

low noise easy maintenance

HIGH PRECISION DIAL

left/right 45° adjustable cutting Angle

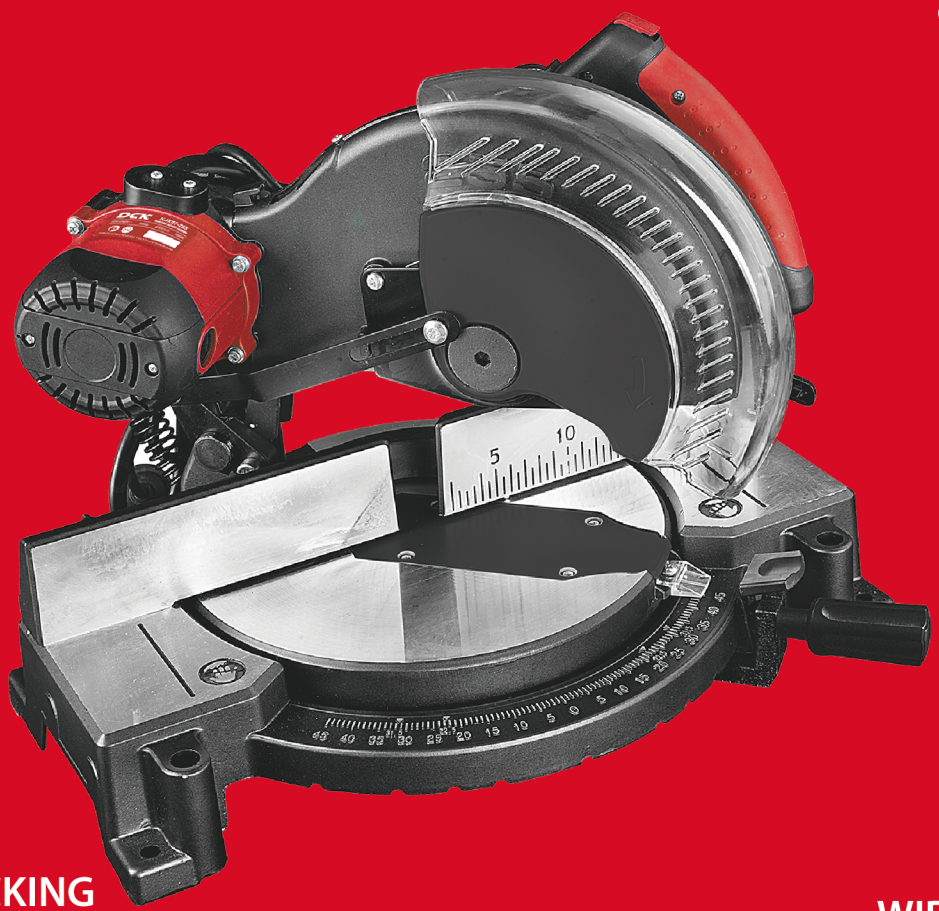

ANTI-SELF-LOCKING SWITCH

safer to use

WIDEN COVER

smooth chip removal

Fast cutting efficient and durable

KJX07-255

ELECTRIC MITER SAW

Rated Power Input			1200W
Hole Dia.of Blade			Φ25.4mm
No-load Speed			6000r/min
Blade Dia.			255mm
Max.Cutting Capacity (HxW)	Miter Angle	0°	45°
	Bevel Angle		Left and Right
	0°	56x145mm	56x110mm
Net Weight			11kg

DCK

NEW

BELT DRIVE STRUCTURE

low noise easy maintenance

HIGH PRECISION DIAL

left/right 45° adjustable cutting Angle

ERGONOMIC ANTI-SLIP HANDLE DESIGN

comfortable for gripping

SAFETY GUARD

automatic shrinkage, dust protection

ANTI-SELF-LOCKING SWITCH

safer to use



Fast cutting efficient and durable

KJX305

ELECTRIC MITER SAW

Rated Power Input			1250W
Hole Dia.of Blade			Φ30mm
No-load Speed			5000r/min
Blade Dia.			305mm
Max.Cutting Capacity (HxW)	Miter Angle	0°	45°
	Bevel Angle		Left and Right
	0°	90x150mm	90x110mm
Net Weight			15.8kg

DCK

NEW

ERGONOMIC STRUCTURE DESIGN

more convenient to use



BELT BUCKLE DESIGN

effectively solve the problem
of carrying and hanging

RUBBER-COVERED HANDLE

more comfortable to hold

STEPLESS SPEED ADJUSTMENT

meet different working requirements

RUBBER-COVERED HANDLE

anti-vibration and anti-slip,
comfortable for gripping

Multi-function powerful and efficient

KJZ10-10/
KJZ10-10K
ELECTRIC DRILL

Rated Power Input	460W
No-load Speed	0-3200r/min
Max. Drilling Capacity	
Steel	Φ10mm
Wood	Φ25mm
Net Weight	1.3kg

DCK

NEW

1900W HIGH POWER

more powerful

TOOL-FREE GUIDE BAR

convenient and efficient

AUTOMATIC OIL PUMPING

effectively extend the service life of the chain



VISIBLE OIL CAPACITY

real-time control of remaining oil

LARGE TRIGGER SAFETY SWITCH

comfortable for operating

Strong power high cutting efficiency

KML05-405

ELECTRIC CHAIN SAW

Rated Power Input	1900W
No-load Speed	480m/min
Max. Length Of Guide Bar	405mm
Net Weight	4.3kg

DCK

NEW

ULTRA LOW VIBRATION ORBIT STRUCTURE DESIGN

effectively reduce operator fatigue

RUBBER-COVERED HANDLE AND BODY

anti-vibration and anti-slip

ERGONOMIC BODY DESIGN

joint palms, comfortable for gripping

DUST BAG DESIGN

effectively purify the operating environment

DUST-PROOF INSULATION SWITCH

dust isolation, improve the service life of the switch



6-SPEED

meet different working requirements

Small body high power

KSA125

RANDOM ORBIT SANDER

Rated Power Input	300W
Rated No-load Speed	4000-12000/min
Wheel Size	Φ125mm
Net Weight	1.4kg

DCK

NEW

TELES COPIC EXTENSION ROD

easy to sand at heights

TOP LOCK FUNCTION

easy to sand the ceiling

SELF-VACUUM FUNCTION

effectively purify the
operating environment



DETACHABLE SANDING DISC EDGE

effectively sand the internal
and external corner

LED LIGHT STRIP DESIGN

360°dead-zone free

BACKPACKING DUST COLLECTING BAG

larger capacity,
reduce cleaning times

Dust-free sanding efficient and portable

KSF04-255

DRYWALL SANDER

Rated Power Input	820W
No-load Speed	600-1800r/min
Sanding Disc Dia.	Φ215mm
Abrasive Paper Dia.	Φ225mm
Telescopic Length	1.0-1.9m
Max. Grinding Height	3.3m
Net Weight (without Extension Bar)	3.5kg
Net Weight (with Extension Bar)	4.1kg

DCK

NEW

GROOVE FORMING AT ONE TIME

efficient and durable

SOFT START,
EARTH LEAKAGE PROTECTION

RETRACTABLE GUARD

no cutting dead zone



ADJUSTABLE GROOVING DEPTH

13-39mm

EXTERNAL VACUUM CLEANER IS AVAILABLE

dust-free,environmentally-friendly

Groove forming at one time

KZR125

GROOVE CUTTER

Rated Power Input	3000W
Blade Dia.	Φ125mm
No-load Speed	7000r/min
Max. Cutting Capacity	39×28mm(Depth×Width)
Net Weight	6.8kg

DCK

NEW

SOFT START, CONSTANT SPEED, OVERLOAD PROTECTION

safer and more reliable

DEEPER CUTTING DEPTH

Max. cutting depth is 38mm



DOUBLE-GEARED DRIVE

higher cutting torque

LEFT/RIGHT 180°ROTATABLE HANDLE DESIGN

meet multiple grooving scenarios needs

Light-weight single blade groove cutter

KZR135

GROOVE CUTTER

Rated Power Input	1500W
Blade Dia.	Φ135mm
No-load Speed	7200r/min
Max. Cutting Capacity	37mm
Net Weight	3.1kg