DCA


NEW

DCA Global

PRECISE CUTTING, EFFICIENT AND DURABLE

3.8KG


LIGHT-WEIGHT MODEL

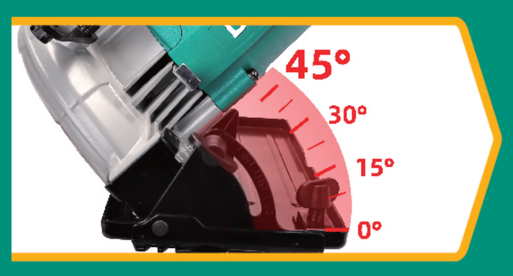

ADJUSTABLE BEVEL CUTTING ANGLE AROUND 0-45°



LARGE DIAMETER INLET AND OUTLET
Efficient heat dissipation

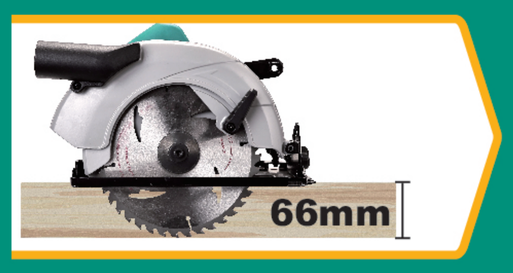

66mm LARGE CUTTING DEPTH



LARGE DUST OUTLET
For smooth chip discharging



AMY02-185SH
Electric Circular Saw

Rated Power Input	1100W
No-load Speed	5600/min
Blade Dia.	185mm
Max. Cutting Capacity	66mm
Max. Cutting Angle	45°
Net Weight	3.8kg



www.dcatools.com

DCA

NEW

20V MAX Lithium-Ion


DCA Global

LIGHTWEIGHT BODY, POWERFUL CUTTING



MICRO HYDRAULIC SYSTEM

High performance motor, higher efficiency

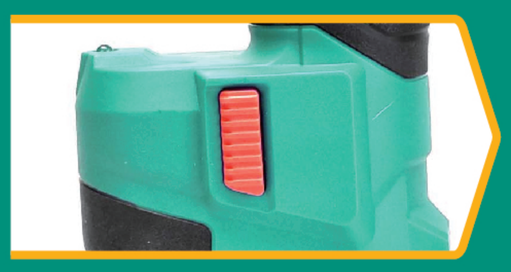

HYDRAULIC SYSTEM WITH AUTOMATIC RETRACTION FUNCTION AND MANUAL RESET FUNCTION

Effectively protect the safety of the machine and operators



THE SHEARING HEAD, SMOOTHLY ROTATES BY 180°

Applicable to different working scenarios





OLED DISPLAY

Intuitive display of working status



LED LIGHTING DESIGN

Convenient for working in dark space

ADYJ40

TYPE(EM/Z)

Cordless Hydraulic Cable Cutter

(Type EM) 4.0Ahx2, 2ACharger
(Type Z) Solo, Plastic Case Packing

Battery	20V MAX/4.0Ah×2/Solo
Max. Crimping Force	30KN
Stroke	25mm
Max. Crimping Dia.	Φ40mm
Oil Capacity	≈60mL
Hydraulic Oil Suggestion	Shell Tellus S2V HV15
Working Temperature	-10-40℃
Net Weight	3.4/2.8kg



www.dcatools.com

DCA

NEW

20V MAX Lithium-Ion

DCA Global

LIGHTWEIGHT BODY, POWERFUL CRIMPING



MICRO HYDRAULIC SYSTEM


High performance motor, higher efficiency






OLED DISPLAY

Intuitive display of working status

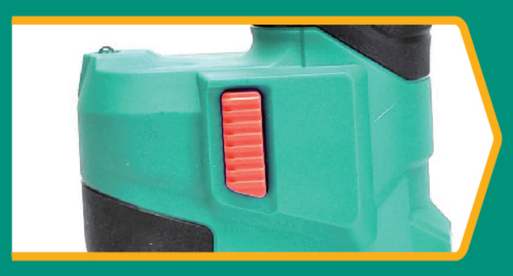

HYDRAULIC SYSTEM WITH AUTOMATIC RETRACTION FUNCTION AND MANUAL RESET FUNCTION

Effectively protect the safety of the machine and operators

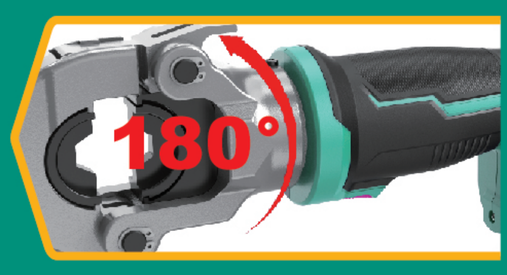

THE CRIMPING HEAD, SMOOTHLY ROTATES BY 180°

Applicable to different working scenarios

ADYH02-300

TYPE(EM/Z)

Cordless Hydraulic Cable Crimping Tool

(Type EM) 4.0Ahx2, 2ACharger
(Type Z) Solo, Plastic Case Packing

Battery	20V MAX/4.0Ah×2/Solo
Max. Crimping force	60KN
Stroke	17mm
Max. Crimping Dia.	Cu 300mm²/ Al 240mm²
Oil Capacity	≈60mL
Hydraulic Oil Suggestion	Shell Tellus S2V HV15
Working Temperature	-10-40℃
Net Weight	4.1/3.5kg



www.dcatools.com

DCA


NEW

EC BRUSHLESS MOTOR

20V MAX Lithium-Ion

DCA Global

POLISHING EXPERT

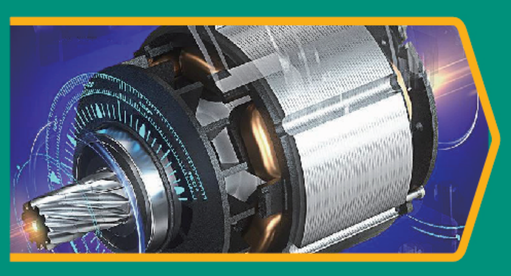

BRUSHLESS MOTOR

Efficient and durable

SOFT START FUNCTION

Effectively protect the
Safety of the operator



ELETRONIC CONSTANT SPEED CONTROL

Maintain constant speed under load



TRIGGER SWITCH WITH LOCK-ON BUTTON



6-SPEED GEAR SHIFT

Meet different working conditions

ADSP02-180

TYPE(BM/FK/Z)
Cordless Brushless Polisher

(Type BM) 4.0Ahx2, 2ACharger
(Type FK) 5.0Ahx2, 4ACharger
(Type Z) Solo, Color Box Packing

Battery	20V MAX/4.0Ah×2/ 5.0Ah×2/Solo
No-load Speed	500-3000/min
Wheel Size	Φ180mm
Speed Mode	1-2-3-4-5-6
Spindle Thread	M14
Net Weight	2.1/2.1/1.5kg

www.dcatools.com