DCA


NEW

EC BRUSHLESS MOTOR

20V MAX Lithium-Ion


DCA Global

MASTER OF ENERGY SAVING

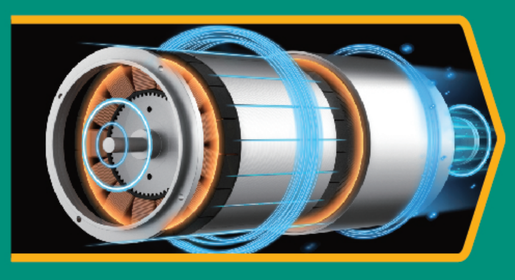


Brushless motor
High-efficiency,
powerful and durable



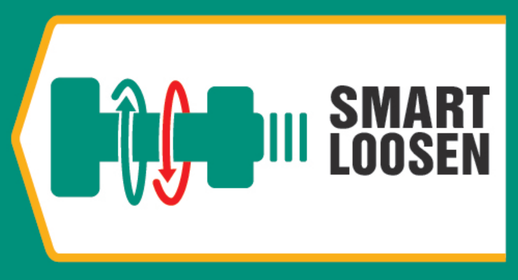


Smart-loosen mode
Prevent fastener dropping

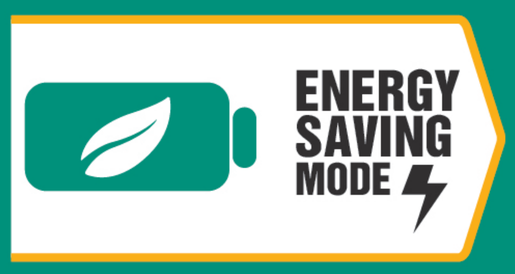

Energy saving mode
Smart-fasten,improved performance with
single battery

New dust-proof structure design
Improved performance and durable

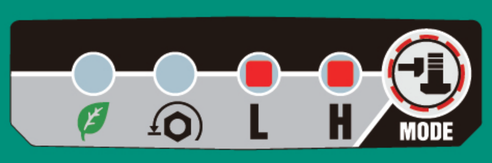

2-speed & torque adjustment
Applicable to different
working conditions



Compact body
Easy to carry and
comfortable to hold

ADPB02-18M

TYPE(DM/EM/FK/Z)

Cordless Brushless
Impact Wrench

(Type DM) 4.0Ahx1,2ACharger
(Type EM) 4.0Ahx2,2ACharger
(Type FK) 5.0Ahx2,4ACharger
(Type Z) Solo, Color Box Packing

Battery		20V MAX/4.0Ahx1/ 4.0Ahx2/5.0Ah×2/Solo
Square Drive Size		12.7mm(1/2")
No-load Speed	Low	0-2000/min
	High	0-2400/min
Impact Frequency	Low	0-2900/min
	High	0-3200/min
Torque Setting		Energy Saving Mode
		Smart-loosen
	Low	260N.m
	High	320N.m
Max. Torque		320N.m
Standard Bolt Size		M12-M18
Net Weight		1.8/1.8/1.8/1.2kg



www.dcatools.com

DCA

NEW

EC BRUSHLESS MOTOR


20V MAX Lithium-Ion

DCA Global

FANTASTIC CHOICE FOR FASTENING



Brushless motor
High-efficiency, powerful and durable

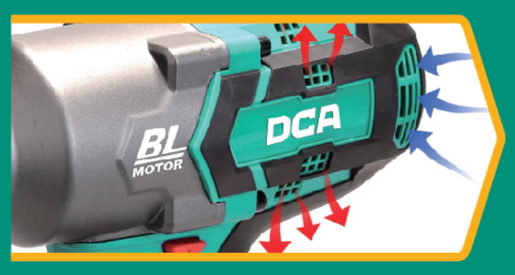

Large ventilation vents
Efficient heat dissipation



LED lighting design
Convenient for working in dark space





3-speed adjustment
Applicable to different working conditions



1000N.m Max torque
Efficient output

ADPB998

TYPE(DM/FK/HK/Z)

Cordless Brushless Impact Wrench

(Type DM) 5.0Ahx1,2ACharger
(Type FK) 5.0Ahx2,4ACharger
(Type HK) 6.0Ahx2,4ACharger
(Type Z) Solo, Carton Packing

Battery	20V MAX/5.0Ahx1/ 5.0Ahx2/6.0Ah×2/Solo	
Square Drive Size	19.05mm(3/4")	
No-load Speed	Low	900/min
	Middle	1100/min
	High	1700/min
Impact Frequency	Low	1200/min
	Middle	1600/min
	High	2000/min
Torque Setting	Low	600N.m
	Middle	800N.m
	High	1000N.m
Max. Torque		1000N.m
Net Weight	3.4/3.4/3.6/2.8kg	



www.dcatools.com

DCA


NEW

DCA Global

PRECISE CUTTING, EFFICIENT AND DURABLE

New blade change system
Higher cutting precision and more durable

Lock button
Less fatigue during extended use

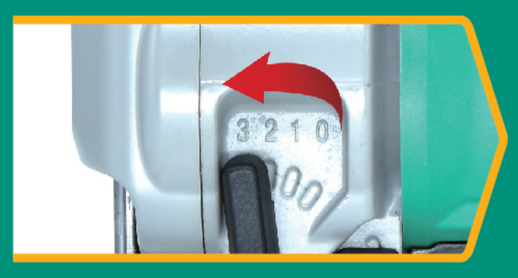


Straight cutting +3 orbital setting
Improve working efficiency and applicable to various cutting conditions



Trigger switch with stepless speed adjustment
Easy to using for different working conditions



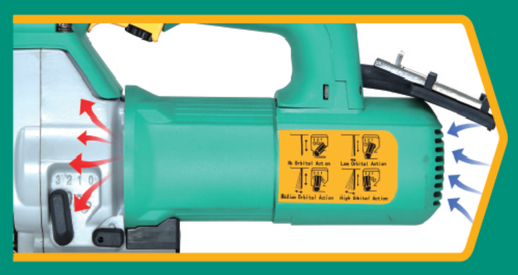

Large ventilation vents
Efficient heat dissipation

0-45° bevel cutting angle
Meet different working requirements

AMQ85S

Jig Saw

Rated Power Input	580W
No-load Strokes	500-3100/min
Bevel Cutting Angle	0-45°Left/Right
Max. Cutting Capacity	
Steel	10mm
Wood	85mm
Net Weight	2.7kg



www.dcatools.com

DCA

NEW

DCA Global

PROFESSIONAL CHOICE FOR SANDING



Ergonomic design
Offer multiple hand placements and reduce operators' fatigue



Rubberized grip
Comfortable to hold

Long life vibration mount
Makes high durability





Low vibration
Reduce arm fatigue



Trigger switch with lock-on button
For operator convenience

Large ventilation vents
Efficient heat dissipation

ASB03-185
Orbital Sander

Rated Power Input	320W
Obital Frequency	14000/min
Pad Size	93*185mm
Net Weight	1.7kg



www.dcatools.com

DCA

NEW

DCA Global

A STEP FURTHER IN DURABILITY

Upgraded efficiency and lifetime

Multiple parts improvements makes high durability

Low vibration design

Improve comfort at the source



Dust proof rocker switch

Convenient and fast with longer runtime



Rubberized grip

Reduce numbness after long-term use



External brush holder

For convenient replacement



ASB03-100S

Orbital Sander

Rated Power Input	240W
Obital Frequency	14000/min
Pad Size	100*110mm
Net Weight	1.2kg



www.dcatools.com

DCA

NEW

20V MAX

Lithium-Ion

DCA Global

THE SULTRY WORKING ENVIRONMENT BRINGS YOU COOL WIND




240mm large diameter blade



AC、DC power setting



360-degree adjustment
Match various applications

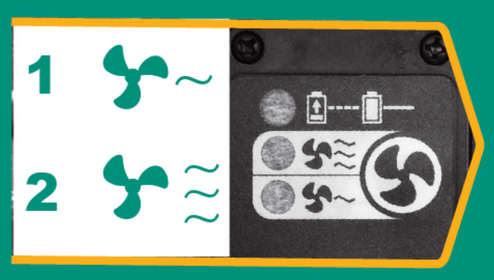

2-speed
Flexible use in practice



ADFS240		
Cordless Fan		
TYPE(Z)		
Battery		20V Max/Solo
No-load Speed	Low	1500/min
	High	2250/min
Blade Dia.		240mm
Net weight		2.3kg



www.dcatools.com