

DCA




EC
BRUSHLESS

20V^{MAX}
Lithium-Ion



BRING COMFORT AND EFFICIENCY AT WORK



BRUSHLESS MOTOR

Delivering up to 320N.m fastening torque



2-SPEED CONTROL

Meeting different working requirements



ECO MODE

Increasing the work life by 30%



SMART LOOSEN MODE

Preventing nuts drop down accidentally



139 mm



139mm COMPACT BODY

Perfect control in narrow space



LONG ENDURANCE

Tightening and loosening up to 760pcs M16 bolt with a 4.0Ah battery pack



PRECISE LEAK-PROOF TECHNOLOGY

Targeting effectively at critical oil leaky spots

Target Users: Construction Workers

ADPB320

CORDLESS BRUSHLESS IMPACT WRENCH

TYPE(FK/EM/EDM/Z)



[Type FK] 5.0Ahx2, 4A Charger
[Type EM] 4.0Ahx2, 2A Charger
[Type EDM] 4.0Ahx1, 2A Charger
[Type Z] Solo, Carton Packing

Battery	20V MAX/5.0Ahx2/4.0Ahx2/4.0Ahx1/Solo	
Max. Power Output	390W	
Square Drive Size	12.7mm(1/2")	
No-load Speed	L gear	0-2000/min
	H gear	0-2200/min
Impact Frequency	L gear	0-2600 /min
	H gear	0-3100 /min
Torque Setting	Energy saving mode	
	Smart-loosen	
	L gear	260N.m
	H gear	320N.m
Nut-Busting Torque	420N.m	
Standard Bolt Size	M12-M18	
Net Weight	1.7/1.7/1.7/1.1kg	



www.dcatools.com

LIGHTWEIGHT AND PORTABLE



DIGITAL DISPLAY SCREEN

Welding current can be seen in real time



120A MAXIMUM CURRENT



ONE BUTTON START WELDING

Working efficiently



THE MACHINE RUNS QUIETLY AND CAN QUICKLY DISSIPATE HEAT



Target Users: Welder

MMA200(III)

INTELLIGENT ARC WELDING MACHINE



Input Voltage	AC 220V		
Frequency(Hz)	50-60		
Rated Output Current(A)	50A/22V		
	120A/24.8V		
No-load Voltage(V)	57		
Rated Duty Cycle	20%	60%	100%
	120A	69A	53A
	24.8V	22.7V	22.1V
Efficiency	0.65		
Housing Protection Grade	IP21S		
Power Factor	0.7		
Insulation Grade	F		
Dimensins(mm)	305*130*215		
Weight(kg)	3.0		



LIGHTWEIGHT AND PORTABLE



DIGITAL DISPLAY SCREEN

Welding current can be seen
in real time



140A MAXIMUM CURRENT



ONE BUTTON START WELDING

Working efficiently



THE MACHINE RUNS QUIETLY
AND CAN QUICKLY DISSIPATE HEAT



Target Users: Welder

MMA250(III)

INTELLIGENT ARC
WELDING MACHINE



Input Voltage	AC 220V		
Frequency(Hz)	50-60		
Rated Output Current(A)	50A/22V		
	140A/25.6V		
No-load Voltage(V)	57		
Rated Duty Cycle	20%	60%	100%
	140A	80A	62A
	25.6V	23.2V	22.4V
Efficiency	0.65		
Housing Protection Grade	IP21S		
Power Factor	0.7		
Insulation Grade	F		
Dimensins(mm)	305*130*215		
Weight(kg)	3.0		



INTELLIGENT OPERATION, QUIET AND COMFORTABLE



DIGITAL DISPLAY SCREEN

Welding current can be seen in real time



150A MAXIMUM CURRENT



ONE BUTTON START WELDING

Working efficiently



THE MACHINE RUNS QUIETLY
AND CAN QUICKLY DISSIPATE HEAT



Target Users: Welder

MMA250D(III)

INTELLIGENT ARC
WELDING MACHINE



Input Voltage	AC 220/380V		
Frequency(Hz)	50-60		
Rated Output Current(A)	30A/21.2V		
	150A/26V		
No-load Voltage(V)	71		
Rated Duty Cycle	30%	60%	100%
	150A	106A	82A
	26V	24.2V	23.2V
Efficiency	0.65		
Housing Protection Grade	IP21S		
Power Factor	0.7		
Insulation Grade	F		
Dimensins(mm)	360*170*300		
Weight(kg)	4.5		



A WELDER THAT WILL SURPRISE YOU



DIGITAL DISPLAY SCREEN

Welding current can be seen in real time



190A MAXIMUM CURRENT



ONE BUTTON START WELDING

Working efficiently



THE MACHINE RUNS QUIETLY
AND CAN QUICKLY DISSIPATE HEAT



Target Users: Welder

MMA315D(III)

INTELLIGENT ARC
WELDING MACHINE



Input Voltage	AC 220/380V		
Frequency(Hz)	50-60		
Rated Output Current(A)	30A/21.2V		
	190A/27.6V		
No-load Voltage(V)	77		
Rated Duty Cycle	30%	60%	100%
	190A	134A	104A
	27.6V	25.3V	24.1V
Efficiency	0.65		
Housing Protection Grade	IP21S		
Power Factor	0.7		
Insulation Grade	F		
Dimensins(mm)	410*210*370		
Weight(kg)	7.0		



INTELLIGENT OPERATION, QUIET AND COMFORTABLE



DIGITAL DISPLAY SCREEN

Welding current can be seen in real time



160A MAXIMUM CURRENT



ONE BUTTON START WELDING

Working efficiently



THE MACHINE RUNS QUIETLY
AND CAN QUICKLY DISSIPATE HEAT



Target Users: Welder

MMA315DT(III)

INTELLIGENT ARC
WELDING MACHINE



Input Voltage	AC 220/380V		
Frequency(Hz)	50-60		
Rated Output Current(A)	30A/21.2V		
	160A/26.4V		
No-load Voltage(V)	71		
Rated Duty Cycle	30%	60%	100%
	160A	113A	87A
	26.4V	24.5V	23.4V
Efficiency	0.65		
Housing Protection Grade	IP21S		
Power Factor	0.7		
Insulation Grade	F		
Dimensins(mm)	350*210*310		
Weight(kg)	5.0		



DCA



A WELDER THAT WILL SURPRISE YOU



DIGITAL DISPLAY SCREEN

Welding current can be seen in real time



260A MAXIMUM CURRENT



ONE BUTTON START WELDING

Working efficiently



THE MACHINE RUNS QUIETLY
AND CAN QUICKLY DISSIPATE HEAT



Target Users: Welder

MMA400D(III) INTELLIGENT ARC WELDING MACHINE



Input Voltage	AC 220V/380V		3~AC 380V
Frequency(Hz)	50-60		
Rated Output Current(A)	30A/21.2V	30A/21.2V	30A/21.2V
	190A/27.6V	200A/28V	200A/28.8V
No-load Voltage(V)	77	77	77
Rated Duty Cycle	30% 60% 100%	30% 60% 100%	30% 60% 100%
	190A 134A 104A	240A 169A 131A	260A 183A 142A
	27.6V 25.3V 24.1V	29.6V 26.7V 25.2V	30.4V 27.3V 25.6V
Efficiency	0.65		
Housing Protection Grade	IP21S		
Power Factor	0.7		
Insulation Grade	F		
Dimensins(mm)	410*210*370		
Weight(kg)	8.0		



www.dcatools.com

HIGH POWER AND EXTREMELY FAST HEAT UP



**2000W MAXIMUM
OUTPUT POWER**

**GOOD HEATING CORE
DESIGN**

Longer working life



STAINLESS STEEL NOZZLE

Durable and well-distributed air-out



**TWO-TEMPERATURE
AND AIRFLOW
ADJUSTMENT**

Target Users: Automobile maintenance worker, Plumber

AQB06-2000 HEAT GUN



Rated Power Input	2000W
Temperature	
Low Temperature	400°C
High Temperature	600°C
Air Flow	
Low Temperature	150L/min
High Temperature	240L/min
Net Weight	0.53kg



POWERFUL AND EFFICIENT, SAFE AND DURABLE



1300W INDUCTION MOTOR

Efficient and durable



**8Bar WORKING
PRESSURE OUTPUT**



OIL-FREE DESIGN

Providing clean air source




HIGH QUALITY NOISE REDUCTION MODULE

Providing a quiet working environment

DUAL CYLINDER COMPRESSION DESIGN

Fast inflation

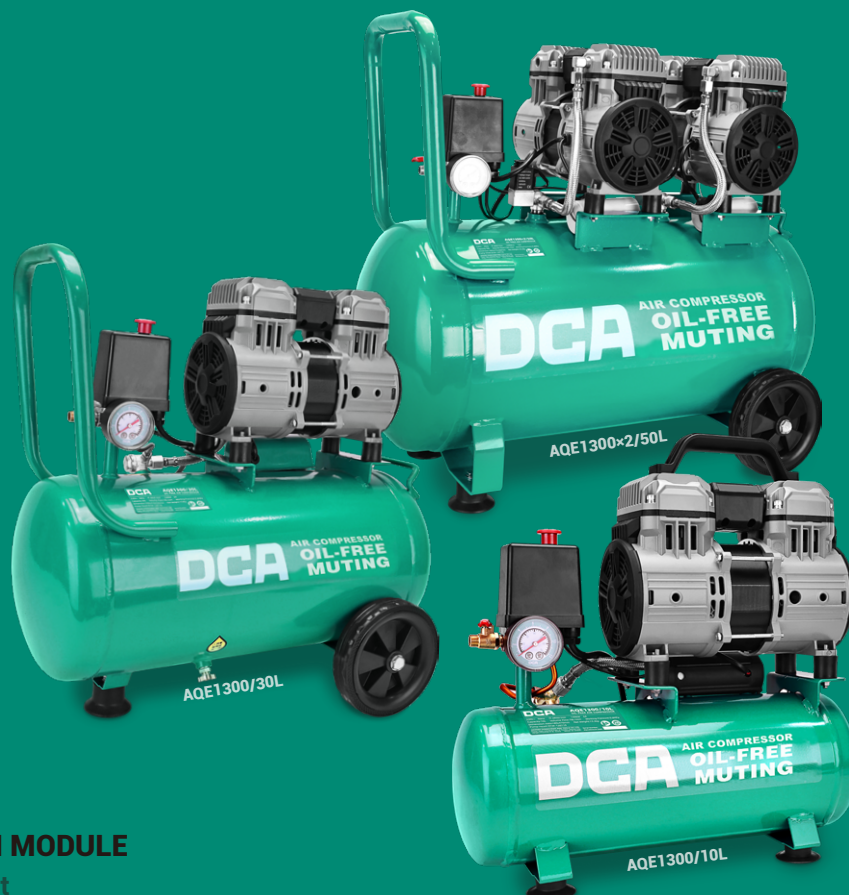

Target Users: Car repairman, Factory painter

AQE1300/10L
AQE1300/30L
AQE1300x2/50L
OIL-FREE AIR COMPRESSOR

Rated Power Input	1300/1300/1300x2W
Rated Speed	2850/min
Working Pressure	8Bar
Capacity	10/30/50L
Displacement	78/78/156L/min
Net Weight	13.2/17.4/33.2kg

