DCK DCK

Authorized Dealer:

Product Catalogue

Garden Tools

Accessories Catalogue

Armature & Stator Catalogue

2025


PRODUCT CATALOG



JIANGSU DONGCHENG M&E TOOLS CO.,LTD.

Power Tools Industrial Park of Tianfen, Qidong City,Jiangsu Province

2025.10

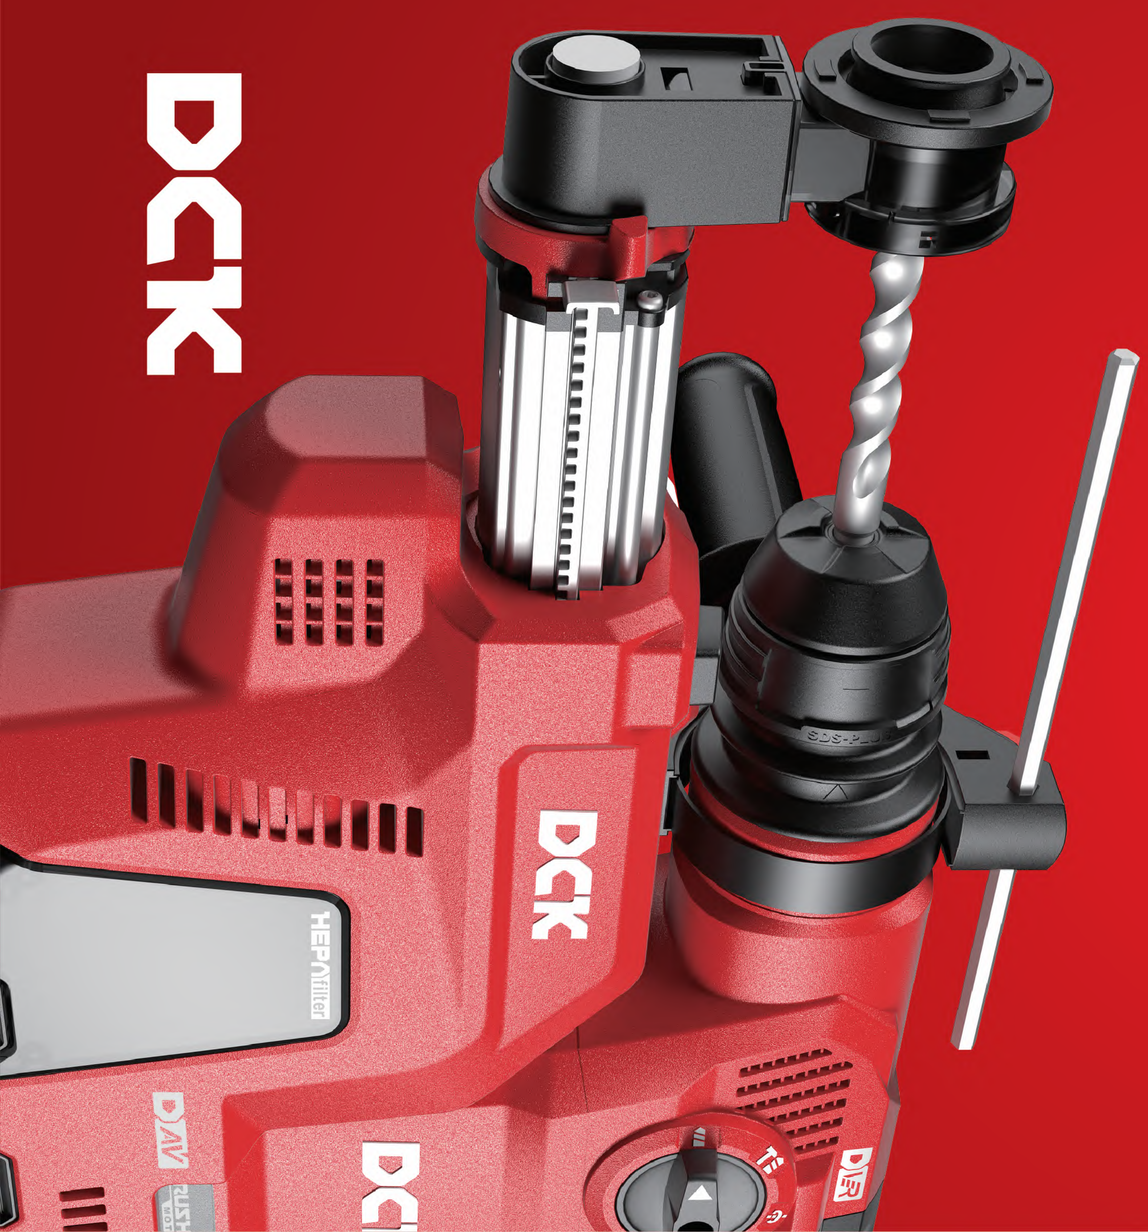

PRODUCT CATALOG

2025.10



ABOUT US

Brand of Jiangsu DongCheng Power Tools Co., Ltd.

1995	350,000 m^2	390,000 m^2	5500+	80+
Establishment	Manufacturing Base	Construction Area	Employees	Countries And Regions

DCK

PRODUCTION BASES

Square meters of the construction area across the **3** DongCheng production bases





Jiangsu DongCheng Power Tools Co., Ltd., founded in **1995**, is one of the key backbone enterprises of the professional power tools manufacturing industry in China, the vice chairman unit of Power Tools Institute of China Electrical Equipment Industrial Association. The company covers an area of **350,000** square meters. With modern plants, first-class production and testing equipment, the construction area is **390,000** square meters. Meanwhile, there are more than **5,500** staff in the company, including a group of professional senior engineers and a senior management and technical team.


DongCheng Company manufactures various types of power tools and sets up franchised dealers around the major cities of China, and its sales networks cover more than **80** countries and regions worldwide, such as Southeast Asia, South Asia, the Middle East, Europe and America, etc.

DCK is a brand of DongCheng Company. By learning and adopting international advanced technology and production concepts, DCK is committed to providing high-end power tools and professional solutions for professional customers. DCK power tools are widely used in building construction, decoration, stone processing, shipbuilding, water conservancy, and agriculture & garden care.

With excellent products and professional service, DCK has become one of the most outstanding brands of professional grade power tools. In the future, it will continue adhering to the company mission of "Professional Power Tools, Keep Improving Unceasingly" and strive to manufacture higher end power tools to global users.

MANUFACTURE ABILITY

Full production process control

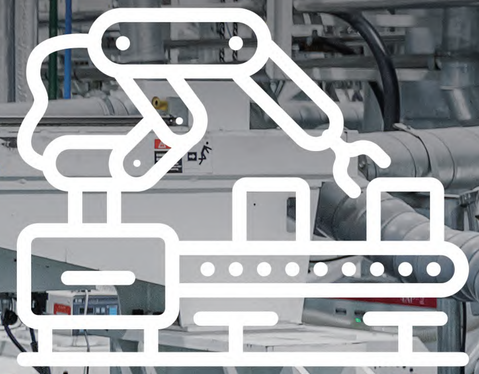



The Fully Automated Motor Production Line

> Hobbing and grindingmachines
> Rotor production line
> The precision machining line for rotors
> Automated stator production assembly line
> Product discharging
> Automatic assembly equipment for rotor components



Power Tools Automated Assembly Line

> A specialized highly automated production line equipped with scientific and efficient automatic assembly equipment greatly reduces errors and increases production capacity



Mold Design & Manufacture

> By utilizing imported high-precision machine tools and a team of highly skilled and specialized mold engineers, we design and manufacture electric tool molds based on precision mold concepts. This ensures that our high-end mold production maintains high precision, high efficiency, automation, low cost, and high quality.
- 18 imported high-speed machining centers
- 16 imported EDM machines
- 9 imported wire-cut EDM machines
- Imported coordinate measuring machines (CMMs)



Precision Injection Molding

> Centralized feed pipeline
> Cooling circulation pipeline
> Fully automatic injection molding system
> Dual-color (two-material) product molding



Automated Aluminum Processing

> The fully automated aluminum processing equipment improves the machining accuracy of the product and further ensures the assembly dimensions. ABB robots are used to grab parts, which improves processingefficiency, reduces human error, and ensures stable processing quality




Battery Pack And Charger Automatic Assembly Line

> Battery cell sorting machine
> Battery cell spot welding machine
> Battery module handling line
> Testing system
> Product discharging
> Battery labelling machine


TEST LABORATARY

DongCheng Tools promotes dedicated quality assurances and testing

> Safety (CE/GS/IEC/EN/UL)
> Electromagnetic compatibility
> Optimum operating conditions
> Performance
> Load durability
> Lithium battery testing
> Rohs compliance

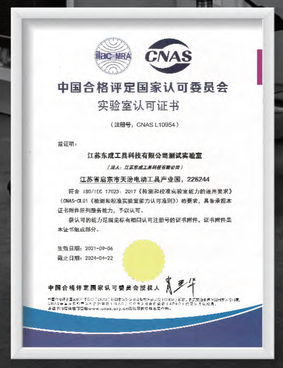

CNAS Accreditation

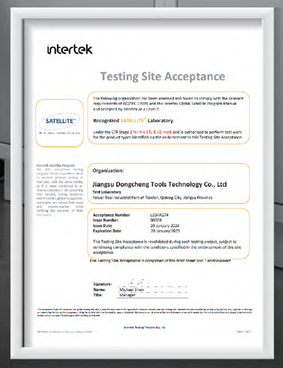

Intertek Certification



TUV Rheinland









CONTENTS & KEY

- Brushless Motor
- High Efficiency
- Vibration Reduction
- Active Vac
- Safety Control
- Heavy Duty
- Super Vibration Control Technology
- Double Insulation
- Variable Speed
- Froward/ Reverse Rotation
- Soft Start
- Overcurrent Protection
- Over Discharge Protection
- Overcharge Protection
- Over-temperature Protection
- Power-off Protection
- Short-circuit Protection
- Double Protection
- Drop Control
- Kickback Control
- Overload Protection
- Electronic Protection
- Overload Restart
- Spindle Lock
- Damping System
- Safety Clutch
- Impact Function
- Dual Function
- Triple Function
- SDS Plus
- SDS Max
- 65 Chisel
- Hex
- Quick Change Workhead
- AC/DC Dual Use
- Speed Gear Shift
- Electronic Gear Shift
- Mechanical Gear Shift
- 4-speed Adjustment
- Auto-stop Carbon Brush
- LED Light
- Digital Display
- Bevel Cutting
- Battery Indicator
- Eco Mode
- Brake
- Constant Speed
- Tool-Free Tension
- Quick Disassembly
- Mute
- Dust Collecting
- Suction& Blowing
- Quick Clamping System
- Reverse Rotation Stop
- Froward Rotation Stop
- Electronic Torque Control
- Wide Voltage
- Active Feedback Sensing Technology
- Electrical Speed Breaking Control Technology
- Hydraulic System
- Waterproof and Dustproof
- Wi-Fi
- Voice Broadcasting
- Infrared Assistant
- Bluetooth
- USB Charging Port
- Type-C Port
- Voltage Testing
- Green Laser
- Automatic Oiling



CONTENTS



CORDLESS TOOLS

DRILLING AND FASTENING

CORDLESS SCREWDRIVER ····· 03
CORDLESS BRUSHLESS IMPACT DRIVER ····· 04-06
CORDLESS BRUSHLESS ANGLE IMPACT DRIVER ····· 04
CORDLESS BRUSHLESS IMPACT WRENCH ····· 08-11
CORDLESS BRUSHLESS ANGLE IMPACT WRENCH ····· 12
CORDLESS BRUSHLESS RATCHET WRENCH ····· 12-13
CORDLESS DRIVER DRILL ····· 13
CORDLESS BRUSHLESS DRIVER DRILL ····· 13-16
CORDLESS BRUSHLESS DRIVER/ HAMMER DRILL ····· 16-20
CORDLESS DRIVER/ HAMMER DRILL ····· 17

CONCRETE & MASONRY TOOLS

CORDLESS BRUSHLESS ROTARY HAMMER ····· 21-24

GRINDING & SANDING & POLISHING

CORDLESS BRUSHLESS ANGLE GRINDER ····· 24-27
CORDLESS BRUSHLESS POLISHER ····· 27

SAWS & CUTTERS

CORDLESS BRUSHLESS CIRCULAR SAW ····· 27-29
CORDLESS SABRE SAW ····· 30
CORDLESS BRUSHLESS RECIPROCATING SAW ····· 30-31
CORDLESS BRUSHLESS JIG SAW ····· 31
CORDLESS BRUSHLESS METAL SHEAR ····· 32

PLANNING & CUTTING

CORDLESS BRUSHLESS OSCILLATING MULTI-TOOL ····· 33

MEASURING & LIGHTING

CORDLESS LED WORK LIGHT ····· 33

CLEANING

CORDLESS BRUSHLESS VACUUM CLEANER ····· 34
CORDLESS BRUSHLESS PRESSURE WASHER ····· 34

GARDEN TOOLS

CORDLESS BRUSHLESS PRUNER ····· 35
CORDLESS BRUSHLESS CHAIN SAW ····· 34-36
CORDLESS BRUSHLESS BLOWER ····· 37

OTHERS

CORDLESS BLIND RIVETING GUN ····· 37
CORDLESS CAULK GUN ····· 38
CORDLESS GREASE GUN ····· 38
CORDLESS BRUSHLESS COMBO KIT ····· 39-40

CORDED TOOLS

DRILLING AND FASTENING

IMPACT SCREWDRIVER ····· 45
ELECTRIC WRENCH ····· 45-46
SHEAR WRENCH ····· 46
ELECTRIC DRILL ····· 46-48
ELECTRIC IMPACT DRILL ····· 48-49
DIAMOND DRILL WITH WATER SOURCE ····· 49-51
MAGNETIC DRILL ····· 51-52

CONCRETE & MASONRY TOOLS

HAMMER DRILL ····· 57-58
ELECTRIC ROTARY HAMMER ····· 58-61
PERCUSSION HAMMER ····· 63-65

GRINDING & SANDING & POLISHING

ANGLE GRINDER ····· 69-76
BRUSHLESS ANGLE GRINDER ····· 72-74
POLISHER ····· 77
DIE GRINDER ····· 77-79
RANDOM ORBIT SANDER ····· 79
ORBITAL SANDER ····· 79-80
BELT SANDER ····· 80
DRYWALL SANDER ····· 80

SAWS & CUTTERS

ELECTRIC CIRCULAR SAW ····· 81
RECIPROCATING SAW ····· 82
JIG SAW ····· 82
MARBLE CUTTER ····· 83-85
GROOVE CUTTER ····· 85
BRUSHLESS GROOVE CUTTER ····· 85
ELECTRIC MITRE SAW ····· 85
ELECTRIC BRUSHLESS MITRE SAW ····· 85
SLIDE COMPOUND MITER SAW ····· 85
ELECTRIC CUT-OFF MACHINE ····· 86-87
ELECTRIC SHEAR ····· 88
ELECTRIC NIBBLER ····· 88

PLANNING & CUTTING

MULTI-TOOL ····· 88
ELECTRIC PLANER ····· 88
TRIMMER ····· 88-89
WOOD ROUTER ····· 89-91

CLEANING

VACUUM CLEANER ····· 91

GARDEN TOOLS

BLOWER VACUUM ····· 91
ELECTRIC CHAIN SAW ····· 91

OTHERS

ELECTRIC MIXER ····· 92
HEAT GUN ····· 92

PTNEUMATIC

AIR BRAD NAILER ····· 94
AIR STAPLER ····· 94
AIR PIN NAILER ····· 94
AIR CONCRETE NAILER ····· 94-95
OIL-FREE AIR COMPRESSOR ····· 96
DOUBLE-TUBE OIL-FREE AIR COMPRESSOR ····· 96



ONE SYSTEM OVER

DURABLE SPECIALLY

FOR 20V LITHIUM BATTERIES



BATTERY SLIDE

Firmly connect batteries and tools for high intensity work

LOCK WITH ONE FINGER

UNIT CELL

NICKEL PLATE




BATTERY INDICATOR





REINFORCED PROTECTIVE WALL

Effectively extend the service life of the terminal



PROTECTIVE BARRIER

Effectively prevent dust from entering the battery pack



SEALING SILICONE

Effectively protect the chip from dust or metal damage



STURDY HOUSING AND BATTERY PROTECTION BRACKET

Good vibration resistancecan, can effectively alleviate the damage of external shock to the battery



- Single cell charging protection;
- Single cell discharging protection;
- Battery pack with temperature on-board detection is more accurate than detected by external tools.

20V MAX

DCK

KDPB968
KDPB1218
KDPB1288
KDPB80
KDPL05-8
KDPB698
KDPB488
KDPB358
KID20V-168
KDPL208
KDJZ2060
KDJZ2090
KDJZ20160
KDJZ2060i
KDJZ2090i
KDJZ03-13
KDJZ20160i
KDMY125
KDMY140S
KDQW2058
KDMY165S
KDMY02-185
KRS20V-22S
KDJF32
KDQF32
KDLB20151
KAG20V-100/ 20V-115/ 20V-125
KDSM04-100P/ 04-115P/ 04-125P
KDZC04-24
KRH20V-26
KRH20V-28
KDVC800
KDGG500
KDSP02-180
KDMD20
KDMP6
KDJJ1.6
KDJJ2.5
KDWL20B
KDYD35S
KDCS20061
KDCS20101
KDCS20122
KDML20081
KDMQ85

01

Select the model you need



Cordless Brushless Impact Driver

KDPL208(TYPE Z)



KDJZ2060 (TYPE Z) KDJZ2090 (TYPE Z) KDJZ20160 (TYPE Z) KDJZ2060i (TYPE Z) KDJZ2090i (TYPE Z) KDJZ20160i (TYPE Z) KDJZ20160i (TYPE Z) KDPL05-8 (TYPE Z) KDPL208 (TYPE Z)



KDPB80 (TYPE Z) KDPB358 (TYPE Z) KDPB488 (TYPE Z) KDPB698 (TYPE Z) KDPB968 (TYPE Z) KDPB1218 (TYPE Z) KDPB1288 (TYPE Z) KDVC800 (TYPE Z) KDQW2058 (TYPE Z) KDGG500 (TYPE Z)



KDZC04-24 (TYPE Z) KRH20V-26 (TYPE Z) KRH20V-28 (TYPE Z) KDMJ85 (TYPE Z) KDJJ1.6 (TYPE Z) KDJJ2.5 (TYPE Z)



KRS20V-22S (TYPE Z) KAG20V-100/115/125 (TYPE Z) KDSM04-100P/115P/125P (TYPE Z) KDMY02-185 (TYPE Z) KDMY140S (TYPE Z) KDMY165S (TYPE Z) KDMY02-185 (TYPE Z)



KDSP02-180 (TYPE Z) KDMD20 (TYPE Z) KDMD20 (TYPE Z) KDLB20151 (TYPE Z)



KDJF32 (TYPE Z) KDYD35S (TYPE Z) KDCS20061 (TYPE Z) KDCS20101 (TYPE Z) KDCS20122 (TYPE Z) KDML20081 (TYPE Z)

02

Select the battery you need



FFBL2040

2.0Ah/2.5Ah not applicable to high-power tools




FFBL2020 2.0Ah | FFBL2025 2.5Ah | FFBL2040 4.0Ah | FFBL2050 5.0Ah | FFBL2060 6.0Ah | FFBL2075 7.5Ah | FFBL2080 8.0Ah

03

Select the charger you need



FFCL20-02



FFCL20-02 2.0A | FFCL20-04 4.0A | FFCL2040-2 Dual4.0A | FFCL2080-02 8.0A

Voltage	Battery Model	Battery Capacity	Charger			
			FFCL20-02/2A	FFCL20-04/4A	FFCL2040-2/Dual 4A	FFCL2080-02/8A
20V MAX	FFBL2020	2.0Ah	≈60min	≈35min	≈35min	≈35min
	FFBL2025	2.5Ah	≈75min	≈45min	≈45min	≈45min
	FFBL2040	4.0Ah	≈120min	≈65min	≈65min	≈40min
	FFBL2050	5.0Ah	≈150min	≈80min	≈80min	≈50min
	FFBL2060	6.0Ah	≈180min	≈95min	≈95min	≈60min
	FFBL2075	7.5Ah	≈225min	≈115min	≈115min	≈75min
	FFBL2080	8.0Ah	≈240min	≈125min	≈125min	≈80min



RECOMMENDED BATTERIES FOR 20VMAX SERIES TOOLST

RECOMMENDED BATTERIES FOR 20VMAX SERIES TOOLS

MODE	2.0Ah FFBL2020	2.5Ah FFBL2025	4.0Ah FFBL2040	5.0Ah FFBL2050	6.0Ah FFBL2060	7.5Ah FFBL2075	8.0Ah FFBL2080
KDPL05-8	●●●	●●●	●●●	●●	●●	●●	●●
KID20V-168	●●	●●	●●●	●●	●●	●	●
KDPL208	●●●	●●●	●●●	●●●	●●	●●	●●
KDPB358	●●	●●	●●●	●●●	●●●	●●	●●
KDPB488	×	×	●●●	●●●	●●●	●●	●●
KDPB698	×	×	●●●	●●●	●●●	●●	●●
KDPB968	×	×	●	●●●	●●●	●●	●●
KDPB1218	×	×	●	●●●	●●●	●●	●●
KDPB1288	×	×	●	●●●	●●●	●●	●●
KDPB80	●●●	●●●	●●●	●●●	●●	●●	●●
KDJZ2060	●●●	●●●	●●●	●●●	●●●	●●	●●
KDJZ2090	●●●	●●●	●●●	●●●	●●●	●●	●●
KDJZ20160	●	●	●●●	●●●	●●●	●●	●●
KDJZ2060i	●●●	●●●	●●●	●●●	●●●	●●	●●
KDJZ2090i	●	●	●●●	●●●	●●●	●●	●●
KDJZ03-13	●	●	●●●	●●●	●●●	●●	●●
KDJZ20160i	●	●	●●●	●●●	●●●	●●	●●
KDZC04-24	×	×	●●●	●●●	●●●	●●	●●
KRH20V-26	×	×	●	●	●●●	●●●	●●●
KRH20V-28	×	×	●	●	●●●	●●●	●●●
KDMY125	×	×	●●●	●●●	●●●	●●●	●●
KDMY140S	×	×	●●●	●●●	●●●	●●●	●●
KDMY165S	×	×	●●●	●●●	●●●	●●●	●●
KDMY02-185	×	×	●●●	●●●	●●●	●●●	●●
KRS20V-22S	●	●	●●●	●●●	●●●	●●	●●
KDJF32	●	●	●●●	●●●	●●●	●●	●●
KDMQ85	●	●	●●●	●●●	●●●	●●	●●
KDJJ1.6	●●●	●●●	●●●	●●●	●●	●●	●●
KDJJ2.5	●	●	●●	●●	●●●	●●●	●●●
KAG20V-100	●	●	●●●	●●●	●●●	●●●	●●●
KAG20V-115	●	●	●●●	●●●	●●●	●●●	●●●
KAG20V-125	●	●	●●●	●●●	●●●	●●●	●●●
KDSM04-100P	●	●	●●●	●●●	●●●	●●●	●●●
KDSM04-115P	●	●	●●●	●●●	●●●	●●●	●●●
KDSM04-125P	●	●	●●●	●●●	●●●	●●●	●●●
KDSP02-180	●	●	●●●	●●●	●●●	●●●	●●●
KDMD20	×	×	●●●	●●●	●●●	●●	●●
KDMP6	●	●	●●●	●●●	●●●	●●	●●
KDQF32	●	●	●●●	●●●	●●●	●●	●●
KDGG500	●●●	●●●	●●●	●●●	●●	●●	●●
KDVC800	●	●	●●●	●●●	×	×	×
KDQW2058	●●	●●	●●●	●●●	●●●	●	●
KDYD35S	●●●	●●●	●●	●●	●●	●●	●●
KDCS20061	●●	●●	●●●	●●●	●●	●	●
KDML20081	●	●	●●●	●●●	●●●	●●	●●
KDCS20101	●	●	●●●	●●●	●●●	●●	●●
KDCS20122	●	●	●●●	●●●	●●●	●●	●●
KDLB20151	●	●	●●●	●●●	●●●	●●	●●

●●● Superior Performance ●● Good Performance ● No Load Operation Only × Not Recommended

12V

DCK



12V Li-Ion Purchase Guide

12V



Cordless Brushless Impact Driver

KDPL04-8(TYPE Z)



KDPL04-8
(TYPE Z)



KDJZ1250
(TYPE Z)



KDJZ1250i
(TYPE Z)



KDPM50
(TYPE Z)



KDQE120
(TYPE Z)



KDPB04-10
(TYPE Z)



KDPB05-10
(TYPE Z)



KDPJ12
(TYPE Z)



KDJF15
(TYPE Z)



LB1220-1
2.0Ah



FFCL12-4

Voltage	Battery Model	Battery Capacity	Charger
			FFCL12-4/3.0A
12V	LB1220-1	2.0Ah	≈40min

16V MAX Li-Ion Purchase Guide

16V MAX



Cordless Driver Drill

KDJZ1602(TYPE Z)



KDJZ1602
(TYPE Z)



KDJZ1602i
(TYPE Z)



LB1620-3
2.0Ah



FFCL1613-2


Voltage	Battery Model	Battery Capacity	Charger
			FFCL1613-2/1.3A
16V MAX	LB1620-3	2.0Ah	≈90min

AC BRUSHLESS MOTOR

AC brushless motors are highly energy efficient, small in size, reliable in performance, low in failure rate, and have a longer lifetime. AC brushless motors can also avoid the common failures of brushed motors such as rotor burnout, short circuit between turns, and commutator wear. It also does not require regular brush inspection and replacement, which represents an important development direction for power tool motors.

>10% *
INCREASE IN EFFICIENCY

≈33% *
VOLUME REDUCTION

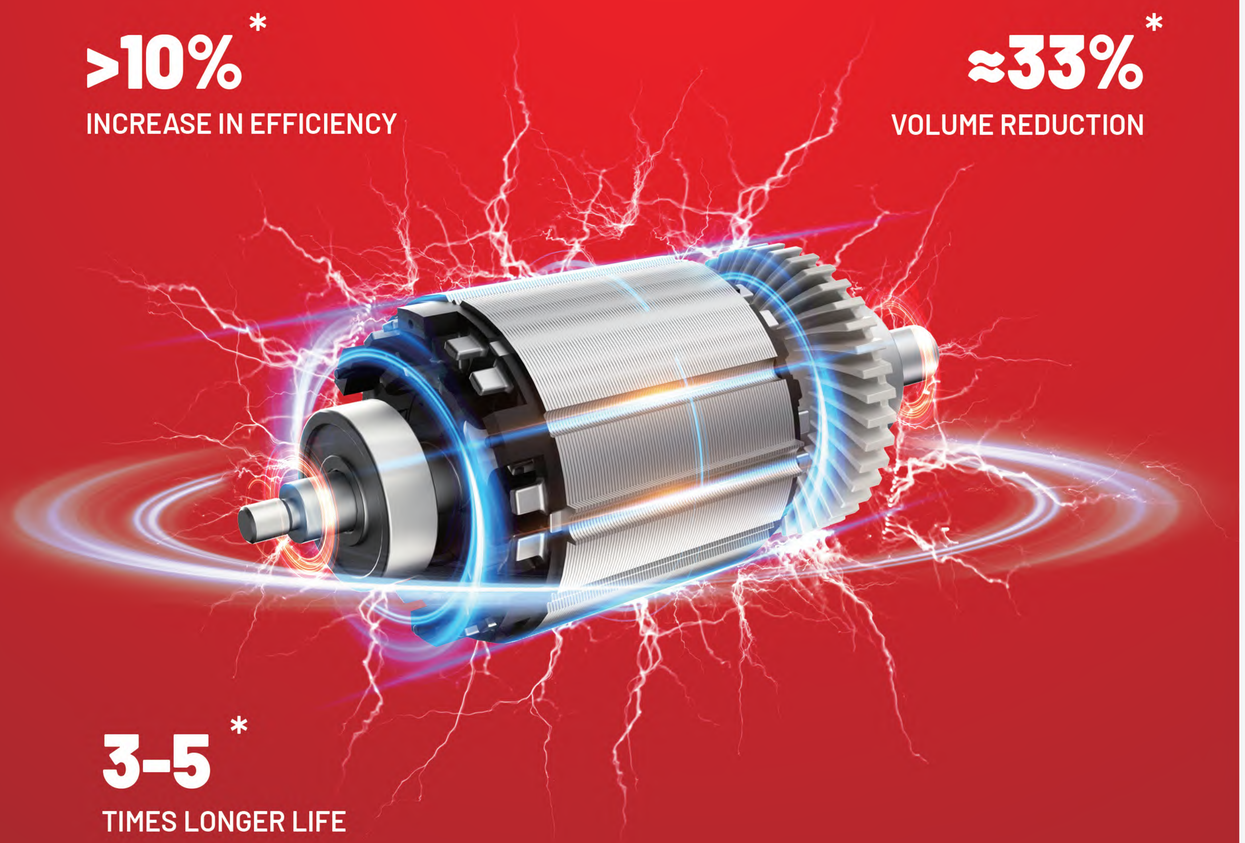

3-5 *
TIMES LONGER LIFE


KSM16-100/16-115
/16-125


KSM180BL


KZR195BL


KJX05-255

* Compared to conventional AC brushed products

BRUSHLESS DC MOTOR

- **HIGH EFFICIENCY**


  Delivering more power and torque for excellent application performance.

- **HIGH DURABILITY**

  Maintenance-free and long lifetime.

- **SUITABLE FOR LONG-TERM USE**

  Less heat generation and less energy wear and tear, extended battery life.

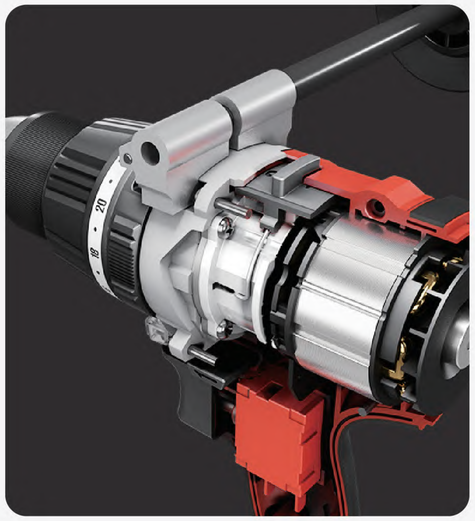

BRUSHLESS OUTER ROTOR MOTOR

- **HIGH POWER DENSITY**

  Providing higher output power and torque compared with the same size normal brushless motor.

- **PRECISE CONTROL**

  More precise speed and torque control




KDCS20101


KDLB20151



KD0W2058


KDCS20061


KD0F32


KDPL208

SAFETY CONTROL TECHNOLOGY

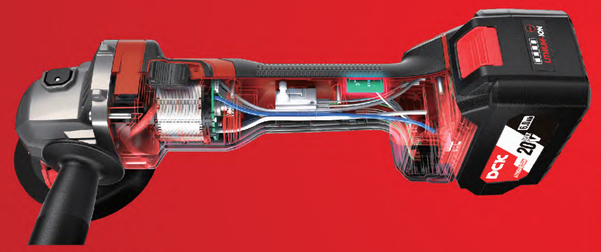

RESPONSIVE

Advanced six-axis sensor with 10 millisecond class transmission.

SMART AND SECURE

It will stop once the acceleration is bigger than 7G or the angular velocity mutation rate is more than 2000°/s.



Kickback Control




Drop Control

ELECTRONIC SPRAIN PREVENTION

It will automatically stop when the sensor detects an angular acceleration of more than 15°.


MECHANICAL CLUTCH


Utilizing the steel ball as the torque transmission component, according to the relative position of the steel ball in the arc-shaped groove, through the slotted butterfly spring to accurately control the torque limit value, when the torque exceeds a certain limit value, it can quickly and accurately play a role in the protection (separation), with high precision and reliable work.

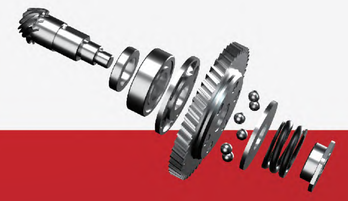

SUPER VIBRATION CONTROL TECHNOLOGY

SVC (Super Vibration Control Technology), which can effectively reduce the fatigue of the operator, and is currently one of the best vibration control technologies in the industry.

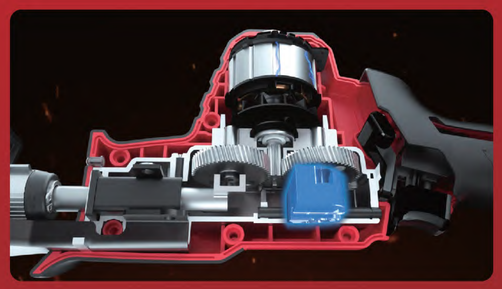

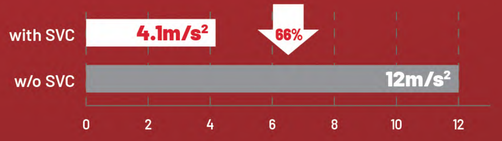


DOUBLE GEARS DRIVE THE BALANCING BLOCK

- No-load vibration of only 4.1m/s², 66% less vibration than last generation.

HIGH EFFICIENCY TECHNOLOGY

- KDPB05-10, which is equipped with, DHE is 136% faster than KDPB02-10

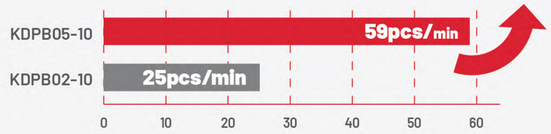



VIBRATION REDUCTION TECHNOLOGY

The outstanding suspension structure is armed with vibration-reduction and isolation modules.

ADVANTAGES:

- Work more comfortably and slow down your physical fatigue during operation;
- Indirectly increase your work efficiency.




ACTIVE VAC TECHNOLOGY

Active vac technology uses the tool's own dust collection system or external equipment to actively collect dust in the work environment, thereby protecting human health and improving the cleanliness of the work environment.



HIGH PRESSURE TECHNOLOGY

The system employs high-frequency pulsation technology, compressing the spring to store energy during the return stroke and releasing higher-pressure pulsed jets during the push stroke. This energy-efficient solution delivers dual advantages of power savings and pressure boost, significantly enhancing cleaning efficiency.

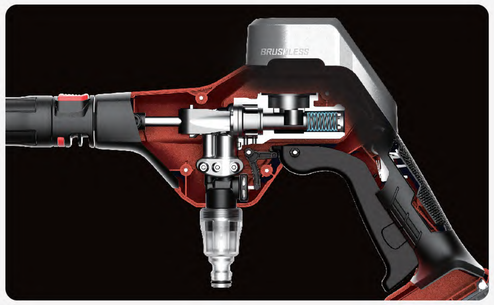

DCK

DC TOOL

Specifications may differ from country to country.

LIST OF IMPACT DRIVERS SERIES

Mode	Product Picture	No-load Speed	Voltage	Max. Fastening Torque	Length (mm)	Net Weight	Led Working Lights Number	Speed Mode Setting	Brushless Internal Rotor Motor	Brushless External Rotor Motor
KDPL04-8		0-1200 /0-3300	12V MAX	140	125mm	0.7-0.9	1	2-speed+self-tapping mode	●	
KDPL05-8		0-1500 /0-2250	20V MAX	80	56mm	1.1-1.4	1	2-speed+smart loosen mode	●	
KID20V-168		0-1200 /0-2100 /0-3300	20V MAX	168	125mm	0.8-1.4	1	3-speed+self-tapping mode	●	
KDPL208		0-1000 /0-2600 /0-3200	20V MAX	208	107mm	0.95-1.6	3	3-speed+self-tapping mode		●

*self-tapping mode: Offering Soft START and perfect ACCELERATION to help you drive screws with precise positioning

KDPL04-8(TYPE EK/Z)

CORDLESS BRUSHLESS IMPACT DRIVER

12V



BRUSHLESS MOTOR

Brushless motor
delivering up to 140N.m of torque

Self-Tapping Mode
soft start for accurate positioning

125mm

125mm compact body
perfect control in narrow space

VELOCITY PROFILE

SELF TAPPING MODE

Offering soft start and perfect acceleration to help you drive screws with precise positioning





Screws in up to 105pcs M6×50mm wood screws with a 2.0Ah battery pack

Accessories & Package

• Driver Bit • Hook • Plastic Case Packing (Except Type Z)

Battery	12V MAX/2.0Ah×2/Solo
Max. Power Output	250W
Clamping Capacity	6.35mm Hex
Standard Bolt Size	M5-M14
Max. Fastening Torque	140N.m
No-load Speed	L gear 0-1200/min
	H gear 0-3300/min
Impact Frequency	L gear 0-1600/min
	H gear 0-4000/min
Net Weight	0.9/0.7kg

(Type EK)2.0Ahx2, 3A Charger
(Type Z)Solo, Color Box Packing

KDPL04-5(TYPE E)

CORDLESS SCREWDRIVER


4V



Battery	4V/2.0Ah
Max. Power Output	36W
Clamping Capacity	6.35mm Hex
Max. Screw Dia.	5mm
Max. Torque	5N.m
No-load Speed	300/min
Torque Setting	3(1-2-3)
Net Weight	0.29kg

Features

1. 3-Gear torque adjustment and 50mm bit set, meet various applications;
2. Small and compact body, easy to use and carry;
3. Type C universal charging interface;
4. Double LED light, easy to operate in dark areas;
5. Rubberized handle, comfortable to hold.

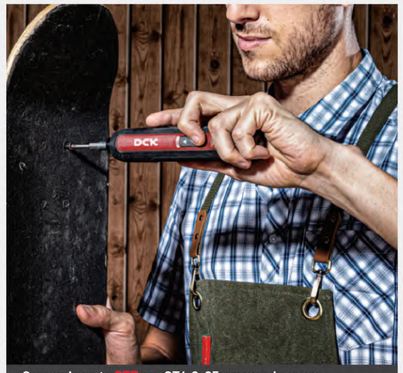

Screws in up to 233pcs ST4.2×25mm wood screws per charge

Accessories & Package

• Type-C Cable • Driver Bits Set • Plastic Case Packing

KDPL05-8(TYPE AM/Z)

CORDLESS BRUSHLESS ANGLE IMPACT DRIVER

20V MAX



BRUSHLESS MOTOR

Battery	20V MAX/2.0Ah×2/Solo
Max. Power Output	160W
Clamping Capacity	6.35mm Hex
No-load Speed	L gear 0-1500/min
	H gear 0-2250/min
Impact Frequency	L gear 0-2400/min
	H gear 0-3400/min
Max. Torque	L gear 45N.m
	H gear 80N.m
Net Weight	1.4/1.1kg

(Type AM)2.0Ahx2, 2A Charger
(Type Z)Solo, Color Box Packing

Features

1. Brushless motor, delivering up to 80N.m of torque;
2. Compact head height, 56mm angle head height for use in close quarters;
3. Smart loosen mode, preventing nuts drop down accidently;
4. 2-mode control, providing excellent control over output.



Screws in up to 200pcs M4×50mm wood screws with a 2.0Ah battery pack

Accessories & Package

• Driver Bit • Plastic Case Packing (Except Type Z)

*Specifications may differ from country to country.



KDPL208 (TYPE EM/ADM/Z)


CORDLESS BRUSHLESS IMPACT DRIVER


BRUSHLESS MOTOR

107mm

Screws in up to 300pcs M6×50mm wood screws with a 4.0Ah battery pack

SPEED TREND CHART

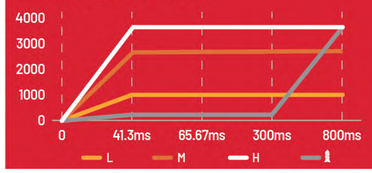



SELF-TAPPING MODE
soft start for accurate positioning



TRIANGLE SHADOWLESS LIGHT
easy to work in dark place



107mm COMPACT BODY
perfect control in narrow space



BRUSHLESS OUTER ROTOR MOTOR
delivering up to 208N.m of torque

KID20V-168(TYPE EM/AM/Z)

CORDLESS BRUSHLESS IMPACT DRIVER

NEW COMING SOON BRUSHLESS MOTOR

125mm



(Type AM) 2.0Ahx2, 2A Charger
(Type EM) 4.0Ahx2, 2A Charger
(Type Z) Solo, Color Box Packing

Battery	20V MAX/4.0Ah×2/2.0Ah×2/Solo
Max. Power Output	450W
Standard Bolt Size	M5-M16
Clamping Capacity	6.35mmHex
No-load Speed	L gear 0-1200/min
	M gear 0-2100/min
	H gear 0-3300/min
Impact frequency	L gear 0-1300/min
	M gear 0-3500/min
	H gear 0-4300/min
Max. Fastening Torque	168N.m
Net Weight	1.4/1.1/0.8kg

Features

1. Brushless motor, delivering up to 168N.m of torque;
2. 125mm compact body, perfect control in narrow space;
3. Self-Tapping Mode, soft start for accurate positioning;
4. 3-speed control, applicable to different working conditions.



Screws in up to 143pcs M6×50mm Self Drilling Screws with a 2.0Ah battery pack

Accessories & Package

• Driver Bit • Belt Clip • Plastic Case Packing (Except Type Z)

KDPL208(TYPE EM/ADM/Z)

CORDLESS BRUSHLESS IMPACT DRIVER

BRUSHLESS MOTOR

107mm




(Type ADM) 2.0Ahx1, 2A Charger
(Type EM) 4.0Ahx2, 2A Charger
(Type Z) Solo, Color Box Packing

Battery	20V MAX/4.0Ah×2/2.0Ah×1/Solo
Max. Power Output	600W
Clamping Capacity	6.35mm Hex
Standard Bolt Size	M5-M16
Torque Setting	L gear 28N.m
	M gear 170N.m
	H gear 208N.m
No-load Speed	L gear 0-1000/min
	M gear 0-2600/min
	H gear 0-3200/min
Impact Frequency	L gear 0-700/min
	M gear 0-3600/min
	H gear 0-4300/min
Net Weight	1.6/1.3/0.95kg

Features

1. Brushless outer rotor motor, delivering up to 208N.m of torque;
2. 107mm ultra compact body, perfect control in narrow space;
3. Self-Tapping Mode, soft start for accurate positioning;
4. 3-speed control,applicable to different working conditions;
5. Triangle shadowless light, easy to work in the dark.

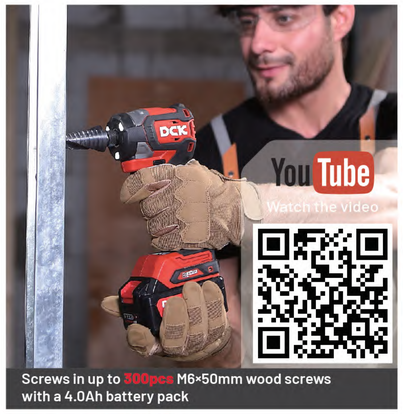

Screws in up to 300pcs M6×50mm wood screws with a 4.0Ah battery pack

Accessories & Package

• Driver Bit • Belt Clip • Plastic Case Packing (Except Type Z)

RECOMMENDED ACCESSORIES

Image	Head	Specification	Product Code	PCS/CTN
	Double	PH2×65	30570900010	1000
	Single	PH1×25	30570900023	2000
	Single	PH2×50	30570900025	1000
	Single	H4×50	30570900027	1000
	Double	PH2×65	30570900033	1200

*Specifications may differ from country to country.

LIST OF IMPACT WRENCH SERIES

Mode	Product Picture	No-load Speed (/min)	Square Drive	Voltage	Max. Fastening Torque(N.M)	Nut-busting Torque (N.m)	Net Weight (kg)	Brushless Motor	Standard Bolt Specifications
KDPB358		0-2000/ 0-2500	1/2" (12.7mm)	20V MAX	358	500	1.1-1.7	●	M12-M18
KDPB488		0-1800/ 0-2100 / 0-2400	1/2" (12.7mm)	20V MAX	488	682	1.4-2.0	●	M12-M20
KDPB698		0-500/ 0-1200 / 0-1900/ 0-2200	1/2" (12.7mm)	20V MAX	698	910	1.9-2.7	●	M10-M24
KDPB968		0-1400/ 0-1650 / 0-1900	1/2" (12.7mm)	20V MAX	968	1700	2.5-3.4	●	M10-M24
KDPB1218		0-1200/ 0-1400 / 0-1700	1/2" (12.7mm)	20V MAX	1218	1700	2.9-3.8	●	M12-M33
KDPB1288		0-1200/ 0-1400 / 0-1700	3/4" (19mm)	20V MAX	1288	1700	3.0-3.9	●	M12-M33
KDPB1718		0-1100/ 0-1500 / 0-1800	3/4" (19mm)	40V MAX	1718	2000	3.2-4.2	●	M12-M36
KDPB1718S		0-1100/ 0-1500 / 0-1800	1" (25.4mm)	40V MAX	1718	2000	3.8-4.8	●	M12-M36
KDPB2088		0-1100/ 0-1400 / 0-1700	1" (25.4mm)	40V MAX	2088	2500	4.4-5.8	●	M12-M42
KDPB80		0-1500/ 0-2250	3/8" (9.5mm)	20V MAX	80	80	1.1-1.4	●	M4-M12

KDPB358(TYPE FK/EM/Z)


20V MAX

CORDLESS BRUSHLESS IMPACT WRENCH




BRUSHLESS MOTOR

Brushless motor
delivers to 358N.m fastening torque



Smart-loosen mode
preventing nuts from dropping down accidentally



2-mode control
providing excellent control over output speed /torque for different working conditions

129mm compact body
perfect control in narrow space



ECO mode
increasing the running time by 30%



Accessories & Package

- Socket Assembly (S22) • Suspension Strap • Belt Clip
- Plastic Case Packing (Except Type Z)

Battery	20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output	400W
Square Drive Size	12.7mm(1/2")
No-load Speed	L gear 0-2000/min
	H gear 0-2500/min
Impact Frequency	L gear 0-2700 /min
	H gear 0-3100 /min
Torque Setting	L gear 300N.m
	H gear 358N.m
Nut-Busting Torque	500N.m
Standard Bolt Size	M12-M18
Net Weight	1.7/1.7/1.1kg

(Type EM) 4.0Ahx2, 2A Charger
(Type FK) 5.0Ahx2, 4A Charger
(Type Z) Solo, Color Box Packing

KDPB488(TYPE FK/EM/DM/Z)

20V MAX

CORDLESS BRUSHLESS IMPACT WRENCH

BRUSHLESS MOTOR



(Type DM) 4.0Ahx1, 2A Charger
(Type EM) 4.0Ahx2, 2A Charger
(Type FK) 5.0Ahx2, 4A Charger
(Type Z) Solo, Color Box Packing

Battery	20V MAX/5.0Ahx2/4.0Ah×2 /4.0Ah×1/Solo
Max. Power Output	450W
Square Drive Size	12.7mm(1/2")
No-load Speed	L gear 0-1800/min
	M gear 0-2100/min
	H gear 0-2400/min
Impact Frequency	L gear 0-2600/min
	M gear 0-3000/min
	H gear 0-3500/min
Torque Setting	L gear 350N.m
	M gear 400N.m
	H gear 488N.m
Nut-Busting Torque	682N.m
Standard Bolt Size	M12-M20
Net Weight	2.0/2.0/2.0/1.4kg

Features

1. Brushless motor, delivering up to 488N.m fastening torque;
2. Smart loosen mode, preventing nuts from dropping down accidentally;
3. 3-mode control, meeting different working requirements.



Accessories & Package

- Socket Assembly(S22) • Belt Clip • Plastic Case Packing (Except Type Z)

*Specifications may differ from country to country.

KDPB698(TYPE H2K/FK/DM/Z)

20V MAX

CORDLESS BRUSHLESS IMPACT WRENCH

BRUSHLESS MOTOR



(Type H2K)6.0Ahx2, 4A Charger, Battery packs sold separately
(Type FK)5.0Ahx2, 4A Charger
(Type DM)5.0Ahx1, 2A Charger
(Type Z)Solo, Color Box Packing

Battery	20V MAX/6.0Ah×2/5.0Ah×2 /5.0Ah×1/Solo
Max. Power Output	750W
Square Drive Size	12.7mm(1/2")
No-load Speed	L gear 0-500/min
	M gear 0-1200/min
	H gear 0-1900/min
	T gear 0-2200/min
Impact Frequency	L gear 0-1000/min
	M gear 0-1700/min
	H gear 0-2400/min
	T gear 0-2700/min
Torque Setting	L gear 300N.m
	M gear 400N.m
	H gear 550N.m
	T gear 698N.m
Nut-Busting Torque	910N.m
Standard Bolt Size	M10-M24
Net Weight	2.8/2.5/2.5/1.9kg

Features

1. Brushless motor, delivering up to 698N.m fastening torque;
2. 4-mode control, applicable to different working conditions;
3. Efficient heat dissipation air vents, effectively extending the lifetime of product.



Tightens and loosens up to 350pcs M20 bolt with a 6.0 Ah battery pack

Accessories & Package

• Plastic Case Packing (Except Type Z)

KDPB968(TYPE H2K/FK/Z)

20V MAX

CORDLESS BRUSHLESS IMPACT WRENCH

NEW BRUSHLESS MOTOR

DVR



(Type H2K)6.0Ahx2, 4A Charger, Battery packs sold separately
(Type FK)5.0Ahx2, 4A Charger
(Type Z)Solo, Color Box Packing

Battery	20VMAX/6.0Ah×2/5.0Ah×2/Solo
Max. Power Output	900W
Square Drive Size	12.7mm(1/2")
Standard Bolt Size	M10-M24
No-load Speed	L gear 0-1400/min
	M gear 0-1650/min
	H gear 0-1900/min
Impact Frequency	L gear 0-1900/min
	M gear 0-2100/min
	H gear 0-2650/min
Torque Setting	L gear 600N.m
	M gear 800N.m
	H gear 968N.m
Nut-Busting Torque	1700N.m
Net Weight	3.4/3.1/2.5kg

Features

1. Brushless motor, delivering up to 968N.m fastening torque and 1700N.m nut-busting torque;
2. 175mm compact body, perfect control in narrow space;
3. Smart loosen&tighten mode, preventing nuts from accidentally falling off / over-tightening;
4. 3-speed control, applicable to different working conditions ;
5. DVR: vibration reduction technology, improving operation comfort.



Tightens and loosens up to 483pcs M24 bolt with a 6.0 Ah battery pack

Accessories & Package

• Belt clip • Plastic Case Packing (Except Type Z)

KDPB1218(TYPE H2K/FK/Z)

20V MAX

CORDLESS BRUSHLESS IMPACT WRENCH

NEW BRUSHLESS MOTOR

DVR



(Type H2K)6.0Ahx2, 4A Charger, Battery packs sold separately
(Type FK)5.0Ahx2, 4A Charger
(Type Z)Solo, Color Box Packing

Battery	20VMAX/6.0Ah×2/5.0Ah×2/Solo
Max. Power Output	800W
Square Drive Size	12.7mm(1/2")
No-load Speed	0-1,200/ 0-1,400/ 0-1,700/min
Impact Frequency	0-1,800/ 0-2,000/ 0-2,300/min
Torque setting	600/900/1,218N.m
Nut-Busting Torque	1,700N.m
Standard Bolt Size	M12-M33
Net Weight	3.8/3.5/2.9kg

Features

1. Brushless motor, delivering up to 1218N.m fastening torque and 1700N.m nut-busting torque;
2. Smart loosen&tighten mode, preventing nuts from accidentally falling off / over-tightening;
3. 3-speed control, applicable to different working conditions;
4. DVR: vibration reduction technology, improving operation comfort.



Tightens and loosens up to 310pcs M24 bolt with a 6.0 Ah battery pack

Accessories & Package

• Plastic Case Packing (Except Type Z)

KDPB1288(TYPE H2K/FK/Z)

20V MAX

CORDLESS BRUSHLESS IMPACT WRENCH

BRUSHLESS MOTOR



1700N.m

Brushless motor
delivering up to 1288N.m fastening torque and 1700N.m nut-busting torque

DVR

DVR: vibration reduction technology
improving operation comfort

SPEED CONVERSION 1 2 3

3-speed control
applicable to different working conditions

Smart loosen & tighten mode
preventing nuts from accidentally falling off / over-tightening

Anvil type
3/4" friction ring



Tightens and loosens up to 380pcs M24 bolt with a 6.0 Ah battery pack

Accessories & Package

• Plastic Case Packing (Except Type Z)

Battery	20V MAX/6.0Ah×2/5.0Ah×2/Solo
Max. power output	800W
Square Drive Size	19mm(3/4")
No-load Speed	L gear 0-1200/min
	M gear 0-1400/min
	H gear 0-1700/min
Impact Frequency	L gear 0-1800/min
	M gear 0-2000/min
	H gear 0-2300/min
Max torque	1288N.m
Nut-Busting Torquet	1700N.m
Standard Bolt Size	M12-M33
Net Weight	3.9/3.6/3.0kg

(Type H2K)6.0Ahx2, 4A Charger, Battery packs sold separately
(Type FK)5.0Ahx2, 4A Charger
(Type Z)Solo, Color Box Packing

KDPB1718(TYPE EK/Z)

40V MAX

CORDLESS BRUSHLESS IMPACT WRENCH

NEW

DVR

BRUSHLESS MOTOR



Battery	40V MAX/4.0Ah×2/Solo
Max. Power Output	1200W
Square Drive Size	19mm(3/4")
No-load Speed	L gear 0-1100/min
	M gear 0-1500/min
	H gear 0-1800/min
Impact Frequency	L gear 0-1800/min
	M gear 0-2200/min
	H gear 0-2500/min
Max. Torque	1718N.m
Nut-Busting Torque	2000N.m
Standard Bolt Size	M12-M36
Net Weight	4.2/3.2kg

(Type EK)4.0Ahx2, 6A Charger
(Type Z)Solo, Color Box Packing

Features

1. Brushless motor, delivering up to 1718N.m fastening torque and 2000N.m nut-busting torque;
2. Smart loosen&tighten mode, preventing nuts from accidentally falling off / over-tightening;
3. 3-speed control, applicable to different working conditions;
4. DVR: vibration reduction technology, improving operation comfort.



Tightens and loosens up to 480pcs M24 bolt with a 4.0Ah battery pack

Accessories & Package

• Plastic Case Packing (Except Type Z)

*Specifications may differ from country to country.

KDPB1718S(TYPE EK/Z)

40V MAX

CORDLESS BRUSHLESS IMPACT WRENCH

NEW



BRUSHLESS MOTOR

Battery	40V MAX/4.0Ah×2/Solo
Max. Power Output	1200W
Square Drive Size	1"(25.4mm)
Standard Bolt Size	M12-M36
No-load Speed	L gear 1100/min
	M gear 1500/min
	H gear 1800/min
Impact Frequency	L gear 1800/min
	M gear 2200/min
	H gear 2500/min
Max. Torque	1718N.m
Nut-Busting Torque	2000N.m
Net Weight	4.9/3.8kg

(Type EK) 4.0Ahx2, 6A Charger
(Type Z) Solo, Color Box Packing

Features

1. Brushless motor, delivering up to 1718N.m fastening torque and 2000N.m nut-busting torque;
2. Smart loosen&tighten mode, preventing nuts from accidentally falling off / over-tightening;
3. 3-speed control, meeting different working requirements;
4. DVR: vibration reduction technology, improving operation comfort.



Tightens and loosens up to 335pcs M24 bolt with a 4.0Ah battery pack

Accessories & Package

• Sling Assembly • Plastic Case Packing (Except Type Z)

40VMAX HPT CHARGER

. SAFE AND EFFICIENT

COMPATIBLE WITH 20VMAX BATTERY PACK CHARGING

OMNIBEARING PROTECTION FUNCTION

SMART CHARGING
Real-time detection and communication.
Adapt charging methods according to the different status of the battery and charge

TRIPLE ELECTRONIC PROTECTIONS
PWM current control
Temperature protection
Over voltage protection

INTELLIGENT CONTROL OF AIR-COOLED HEAT DISSIPATION
Dual-fan design provides heat dissipation for the battery pack and charger separately, to improve charging efficiency and reduce temperature rise

FAST CHARGING ≈45 MINUTES
To fully charge a 40V 4.0Ah battery



FFCL4060-02
6A FAST CHARGER

KDPB2088(TYPE EK/Z)

40V MAX

CORDLESS BRUSHLESS IMPACT WRENCH

NEW



BRUSHLESS MOTOR

Battery	40V MAX/4.0Ah×2/Solo
Max. Power Output	1300W
Square Drive Size	1"(25.4mm)
Standard Bolt Size	M12-M42
No-load Speed	L gear 1100/min
	M gear 1400/min
	H gear 1700/min
Impact Frequency	L gear 1750/min
	M gear 2100/min
	H gear 2300/min
Max. Torque	2088N.m
Nut-Busting Torque	2500N.m
Net Weight	5.8/4.4kg

(Type EK) 4.0Ahx2, 6A Charger
(Type Z) Solo, Color Box Packing

Features

1. Brushless motor, delivering up to 2088N.m fastening torque and 2500N.m nut-busting torque;
2. Smart loosen&tighten mode, preventing nuts from accidentally falling off / over-tightening;
3. 3-speed control, meeting different working requirements;
4. DVR: vibration reduction technology, improving operation comfort.



Tightens and loosens up to 490pcs M24 bolt with a 4.0Ah battery pack

Accessories & Package

• Plastic Case Packing (Except Type Z)

KDPB80(TYPE AM/Z)

20V MAX

CORDLESS BRUSHLESS ANGLE IMPACT WRENCH

BRUSHLESS MOTOR



Battery	20V MAX/2.0Ah×2/Solo
Max. Power Output	160W
No-load Speed	L gear 0-1500/min
	H gear 0-2250/min
Impact Frequency	L gear 0-2400/min
	H gear 0-3400/min
Max. Torque	L gear 45N.m
	H gear 80N.m
Square Drive Size	9.5mm(3/8")
Net weight	1.4/1.1kg

(Type AM) 2.0Ahx2, 2A Charger
(Type Z) Solo, Color Box Packing

Features

1. Brushless motor, delivering up to 80N.m of max. torque;
2. Compact head height, 56mm angle head height for use in close quarters;
3. Extended paddle switch, for multiple grip positions;
4. 2-speed control, applicable to different working conditions;
5. Smart loosen mode, preventing nuts from dropping down accidentally .



Tightens and loosens up to 537pcs M12 bolt with a 2.0Ah battery pack

Accessories & Package

• Square Drive Adapter • Belt clip • Plastic Case Packing (Except Type Z)

40VMAX HPT BATTERY PACK

. HIGH SAFETY . HIGH PERFORMANCE . HIGH DURABILITY

SPECIALLY DESIGNED FOR 40VMAX LI-ION PRODUCTS



FFBL4040
4.0AH BATTERY PACK

UNIQUE AIR DUCT DESIGN
Effective heat dissipation

HIGH STRENGTH STAINLESS STEEL SLIDE RAIL
Durable slide in battery rail that holds the battery and the tools firmly

HIGH STRENGTH CONNECTOR TERMINALS
Smaller contact resistance, longer service life

INTELLIGENT MONITORING SYSTEM
Real-time monitoring of battery status, effectively protect the battery

KDPB04-10(TYPE EK/Z)

12V

CORDLESS BRUSHLESS RATCHET WRENCH

BRUSHLESS MOTOR



Battery	12V MAX/2.0Ah×2/Solo
Max. Power Output	220W
No-load Speed	0-280/min
Max. Torque	54N.m
Square Drive Size	9.5mm(3/8")
Standard Bolt Size	M5-M12
Net weight	1.0/0.8kg

(Type EK) 2.0Ahx2, 3A Charger
(Type Z) Solo, Color Box Packing

Features

1. Brushless motor, delivering up to 54N.m fastening torque;
2. 34mm head height;
3. Manual and electric dual operation;
4. Four finger paddle switch, for easy operation.



Tightens and loosens up to 192pcs M12 bolt with a 2.0Ah battery pack

Accessories & Package

• Plastic Case Packing (Except Type Z)

*Specifications may differ from country to country.

KDPB05-10(TYPE EK/Z)

12V

CORDLESS BRUSHLESS RATCHET WRENCH

BRUSHLESS MOTOR

DHE



Battery	12V MAX/2.0Ah×2/Solo
Max. Power Output	260W
No-load Speed	0-480/min
Max. Torque	47N.m
Square Drive Size	9.5mm(3/8")
Standard Bolt Size	M5-M12
Net weight	1.0/0.8kg

(Type EK)2.0Ahx2, 3A Charger
(Type Z)Solo, Color Box Packing



Tightens and loosens up to 260pcs M12 bolt with a 2.0Ah battery pack

Features

1. Powerful brushless motor delivers 47N.m of max. torque;
2. 34mm angle head height;
3. DHE system, boosting efficiency by 20%;
4. Four finger paddle switch, for easy operation.

Accessories & Package

• Plastic Case Packing(Except Type Z)

KDJZ1250(TYPE EK/Z)

12V

CORDLESS BRUSHLESS DRIVER DRILL

NEW BRUSHLESS MOTOR



Battery	12V MAX/2.0Ah×2/Solo
Max. Power Output	280W
Max. Chucking Capacity	10mm
No-load Speed	1st gear 0-500/min
	2nd gear 0-1800/min
Max. Drilling Dia.	Steel Φ10mm
	Wood Φ32mm
Torque Setting	21+1
Max. Torque	50N.m
Net Weight	1.05/0.85kg

(Type EK)2.0Ahx2, 3A Charger
(Type Z)Solo, Color Box Packing



Screws in and out up to 612pcs ST4.2×25mm wood screws in 40mm pine board with a 2.0Ah battery pack

Features

1. Brushless motor, delivering up to 50N.m of torque and 1800/min no-load speed;
2. 141mm compact body, perfect control in narrow space;
3. 21+1 torque setting, for a variety of applications;
4. 10mm(3/8") Ratchet metal chuck, sturdy and durable;
5. Reinforced tail cap for durability.

Accessories & Package

• Driver Bit • Plastic Case Packing(Except Type Z)

KDJZ1602(TYPE E)

16V MAX

CORDLESS DRIVER DRILL



Battery	16V MAX/2.0Ah×2
Max. Power Output	170W
Max. Chucking Capacity	10mm
Max. Screw Dia.	7mm
No-load Speed	1st gear 0-400/min
	2nd gear 0-1500/min
Max. Drilling Dia.	Steel Φ10mm
	Wood Φ20mm
Torque Setting	18+1
Max. Torque	38N.m
Net Weight	1.05kg

(Type E)2.0Ah×2, 1.3A Charger



Screws in and out up to 423pcs ST4.2×25mm wood screws in 40mm pine board with a 2.0Ah battery pack

Features

1. 38N.m Max. Torque;
2. 18+1 torque setting, for a variety of applications;
3. 2-speed adjustment, high torque for screw driving,high speed for drilling;
4. LED working light.

Accessories & Package

• Driver Bit • Plastic Case Packing

LIST OF CORDLESS DRIVER/HAMMER DRILL SERIES

Mode	Product Picture	Voltage	Max. Power Output (W)	Max. Torque (N.m)	Main Function								Torque Setting	Scenarios Of Use
					F/r Change	Overcurrent Protection	Variable Speed	Mechanical Gear Shift	METAL Keyless Chuck	2-speed Adjustment	BI Motor	Impact Function		
KDJZ1250		12V	280	50	●	●	●	●	●	●	●		21+1	home improvement
KDJZ1602		16V MAX	170	38	●	●	●	●		●			18+1	home improvement assemble and install
KDJZ2060		20V MAX	500	60	●	●	●	●	●	●	●		20+1	home improvement assemble and install
KDJZ2090		20V MAX	700	90	●	●	●	●	●	●	●		19+1	home improvement assemble and install
KDJZ20160		20V MAX	1000	160	●	●	●	●	●	●	●		19+1	home improvement (large torque)
KDJZ1250i		12V	280	50	●	●	●	●	●	●	●	●	21+2	home improvement assemble and install
KDJZ1602i		16V MAX	170	38	●	●	●	●		●		●	18+2	home improvement assemble and install
KDJZ2060i		20V MAX	500	60	●	●	●	●	●	●	●	●	20+2	home improvement assemble and install
KDJZ2090i		20V MAX	700	90	●	●	●	●	●	●	●	●	19+2	home improvement assemble and install
KDJZ03-13		20V MAX	850	120	●	●	●	●	●	●	●	●	24+2	home improvement (large torque)
KDJZ20160i		20V MAX	1000	160	●	●	●	●	●	●	●	●	19+2	home improvement (large torque)

*Specifications may differ from country to country.

KDJZ2060(TYPE EM/AM/ADM/Z)

20V MAX

CORDLESS BRUSHLESS DRIVER DRILL



20+1 torque setting
for a variety of application

1 **1st gear** 0-600/min

2 **2nd gear** 0-2300/min

2-speed adjustment
high torque for screw driving, high speed for drilling

BRUSHLESS MOTOR

Brushless motor
delivering up to 60N.m of torque and up to 2300/min no-load speed

13mm (1/2") metal ratchet chuck
sturdy and durable



147mm compact body
perfect control in narrow space



Screws in and out up to **188pcs** ST6×50mm wood screws in 40mm pine board with a 2.0Ah battery pack

Accessories & Package

•Belt Clip • Driver Bit • Plastic Case Packing (Except Type Z)

Battery	20V MAX/4.0Ah×2/2.0Ah×2
	/2.0Ah×1/Solo
Max. Power Output	500W
Max. Chucking Capacity	13mm
No-load Speed	1st gear 0-600/min
	2nd gear 0-2300/min
Max. Drilling Dia.	Steel Φ13mm
	Wood Φ38mm
Torque Setting	20+1
Max. Torque	60N.m
Net Weight	1.6/1.4/1.4/1.0kg

(Type EM) 4.0Ahx2,2A Charger
(Type AM) 2.0Ahx2, 2A Charger
(Type ADM) 2.0Ahx1, 2A Charger
(Type Z) Solo, Color Box Packing

KDJZ2090(TYPE EM/AM/Z)

20V MAX

CORDLESS BRUSHLESS DRIVER DRILL

NEW BRUSHLESS MOTOR



DSC

Battery	20V MAX/4.0Ah×2/2.0Ah×2/Solo
Max. Chucking Capacity	13mm
Max. Power Output	700W
No-load Speed	1st gear 0-500/min
	2nd gear 0-2200/min
Max. Drilling Dia.	Steel Φ13mm
	Wood Φ52mm
Torque Setting	19+1
Max. Torque	90N.m
Net Weight	1.8/1.6/1.2kg

(Type EM) 4.0Ahx2, 2A Charger
(Type AM) 2.0Ahx2, 2A Charger
(Type Z) Solo, Color Box Packing

Features

1. Brushless motor, delivering up to 90N.m of torque and 2200/min no-load speed;
2. 149mm compact body, perfect control in narrow space;
3. 19+1 torque setting, for a variety of applications;
4. 13mm (1/2") metal ratchet chuck, sturdy and durable;
5. DSC safety control technology, protecting the machine and user when the drill bit gets stuck.



Screws in and out up to **470pcs** ST6×50mm wood screws in 50mm pine board with a 4.0Ah battery pack

Accessories & Package

•Belt Clip • Driver Bit • Plastic Case Packing (Except Type Z)

KDJZ20160(TYPE FK/EM/Z)

20V MAX

CORDLESS BRUSHLESS DRIVER DRILL

NEW BRUSHLESS MOTOR




DSC

Battery	20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Chucking Capacity	13mm
Max. Power Output	1000W
No-load Speed	1st gear 0-500/min
	2nd gear 0-2100/min
Max. Drilling Dia.	Steel Φ13mm
	Wood Φ65mm
Torque Setting	19+1
Max. Torque	160N.m
Net Weight	2.4/2.4/1.8kg

(Type FK) 5.0Ahx2, 4A Charger
(Type EM) 4.0Ahx2, 2A Charger
(Type Z) Solo, Color Box Packing

Features

1. Brushless motor, delivering up to 160N.m of torque and 2100/min no-load speed;
2. 19+1 torque setting, for a variety of application;
3. 13mm (1/2") Ratchet metal chuck, sturdy and durable;
4. DSC safety control technology, delivers outstanding safety protection;
5. Self-Tapping Mode, soft start for accurate positioning.

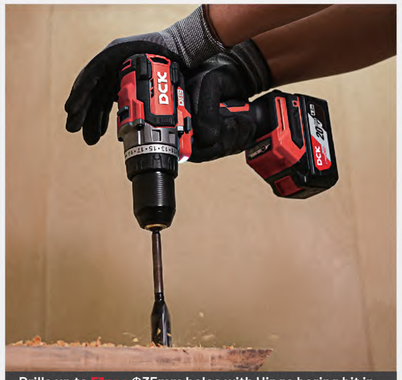

Drills up to **51pcs** Φ35mm holes with Hinge boring bit in 40mm pine board with a 4.0Ah battery pack

Accessories & Package

•Belt Clip • Driver Bit • Plastic Case Packing (Except Type Z)

KDJZ1250i(TYPE EK/Z)

12V

CORDLESS BRUSHLESS DRIVER/ HAMMER DRILL

NEW BRUSHLESS MOTOR

10mm (3/8") Ratchet metal chuck
Sturdy and durable

21+2



21+2 torque setting
for a variety of applications





Reinforced tail cap for durability

1 **1st gear** 0-500/min

2 **2nd gear** 0-1800/min

2-speed adjustment
high torque for screw driving, high speed for drilling

BRUSHLESS MOTOR

Brushless motor
delivering up to 50N.m of torque and 1800/min no-load speed





Screws in and out up to **612pcs** ST4.2×25mm wood screws in 40mm pine board with a 2.0Ah battery pack

Accessories & Package

• Belt Clip • Driver Bit • Plastic Case Packing (Except Type Z)

Battey	12V MAX/2.0Ahx2/Solo
Max. Power Output	280W
Max. Chucking Capacity	10mm
Impact Frequency	0-28800/min
No-load Speed	1st gear 0-500/min
	2nd gear 0-1800/min
Max. Drilling Dia.	Steel Φ10mm
	Brick wall Φ10mm
	Wood Φ32mm
Torque Setting	21+2
Max. Torque	50N.m
Net Weight	1.1/0.9kg

(Type EK) 2.0Ahx2, 3A Charger
(Type Z) Solo, Color Box Packing

*Specifications may differ from country to country.

KDJZ1602i(TYPE E)

16V MAX

CORDLESS DRIVER/ HAMMER DRILL



Battery	16V MAX /2.0Ah×2	
Max. Power Output	170W	
Max. Chucking Capacity	10mm	
Max. Screw Dia.	7mm	
Impact Frequency	0-22500/min	
No-load Speed	Low	0-400r/min
	High	0-1500r/min
Max. Drilling Dia.	Steel	Φ10mm
	Brick wall	Φ8mm
	Wood	Φ22mm
Torque Setting	18+2	
Max. Torque	38N.m	
Net Weight	1.1kg	

Features (Type E) 2.0Ah×2, 1.3A Charger

1. 38N.m Max. Torque;
2. 18+2 torque setting, for a variety of applications;
3. 10mm (3/8") high-strength keyless chuck;
4. 2-speed adjustment, high torque for screw driving,high speed for drilling;
5. LED working light.



Screws in and out up to **423pcs** ST4.2×25mm wood screws in 40mm pine board with a 2.0Ah battery pack

Accessories & Package

• Driver Bit • Plastic Case Packing

KDJZ2060i(TYPE EM/AM/ADM/Z)

20V MAX

CORDLESS BRUSHLESS DRIVER/ HAMMER DRILL





Screws in and out up to **186pcs** ST6×50mm wood screws in 40mm pine board with a 2.0Ah battery pack

Accessories & Package

• Driver Bit • Belt Clip • Plastic Case Packing (Except Type Z)

Battery	20V MAX/4.0Ah×2/2.0Ah×2 /2.0Ah×1/Solo
Max. Power Output	500W
Max. Chucking Capacity	13mm
Rated Impact Frequency	0-34500/min
No-load Speed	1st gear 0-600/min
	2nd gear 0-2300/min
Max. Drilling Dia.	Steel Φ13mm
	Brick wall Φ13mm
	Wood Φ38mm
Torque Setting	20+2
Max. Torque	60N.m
Net Weight	1.7/1.5/1.5/1.1kg

(Type EM) 4.0Ahx2, 2A Charger
(Type AM) 2.0Ahx2, 2A Charger
(Type ADM) 2.0Ahx1, 2A Charger
(Type Z) Solo, Color Box Packing

EXTREME PERFORMANCE WITH ULTRA COMPACT DESIGN

20V MAX

NEW

KDJZ2090i

(TYPE EM/AM/Z)

CORDLESS BRUSHLESS DRIVER/ HAMMER DRILL

BRUSHLESS MOTOR

DSC

Screws in and out up to **396pcs** ST6×50mm wood screws in 50mm pine board with a 4.0Ah battery pack

BRUSHLESS MOTOR
delivering up to 90N.m of torque and 2200/min no-load speed

19+2
19+2 TORQUE SETTING
for a variety of applications

DSC: SAFETY CONTROL TECHNOLOGY
protecting the machine and user when the drill bit gets stuck

SELF-TAPPING MODE
soft start for accurate positioning



13mm (1/2") RATCHET METAL CHUCK
sturdy and durable

2 SPEED
2-SPEED ADJUSTMENT
high torque for screw driving, high speed for drilling

*Specifications may differ from country to country.

EXCELLENT IN SUSTAINED HEAVY-DUTY WORK

20V MAX



YouTube
Watch the video

KDJZ20160i
(TYPE FK/EM/Z)

CORDLESS BRUSHLESS DRIVER/ HAMMER DRILL

BRUSHLESS MOTOR

DSC

Drills up to 50pcs Φ35mm holes with Hinge boring bit in 40mm pine board with a 4.0Ah battery pack

BRUSHLESS MOTOR
delivering up to 160N.m of torque and 2100/min no-load speed

19+2


19+2 TORQUE SETTING
for a variety of applications

DSC: SAFETY CONTROL TECHNOLOGY
protecting the machine and user when the drill bit gets stuck

SELF-TAPPING MODE
soft start for accurate positioning


Φ16 MAX. DRILL CAPACITY ON BRICK WALL

2 SPEED
2-SPEED ADJUSTMENT
high torque for screw driving, high speed for drilling

KDJZ2090i(TYPE EM/AM/Z)

20V MAX

CORDLESS BRUSHLESS DRIVER/ HAMMER DRILL

NEW BRUSHLESS MOTOR



DSC

Battery	20V MAX/4.0Ah×2/2.0Ah×2/Solo
Max. Chucking Capacity	13mm
Max. Power Output	700W
No-load Speed	1st gear 0-500/min
	2nd gear 0-2200/min
Rated Impact Frequency	0-34500/min
Max. Drilling Dia.	Steel Φ13mm
	Brick wall Φ13mm
	Wood Φ52mm
Torque Setting	19+2
Max. Torque	90N.m
Net Weight	1.9/1.7/1.3kg

(Type EM) 4.0Ahx2, 2A Charger
(Type AM) 2.0Ahx2, 2A Charger
(Type Z) Solo, Color Box Packing

Features
1. Brushless motor: Delivering up to 90N.m of torque and 2200/min no-load speed;
2. 19+2 torque setting: For a variety of applications;
3. 13mm (1/2") Ratchet metal chuck: Sturdy and durable;
4. DSC: Safety Control Technology, protecting the machine and user when the drill bit gets stuck.



Screws in and out up to 396pcs ST6×50mm wood screws in 50mm pine board with a 4.0Ah battery pack

Accessories & Package
• Driver Bit • Belt Cilp • Plastic Case Packing (Except Type Z)

KDJZ03-13(TYPE FK/EM/Z)

20V MAX

CORDLESS BRUSHLESS DRIVER/ HAMMER DRILL


BRUSHLESS MOTOR



Battery	20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output	850W
Max. Chucking Capacity	13mm
Max. Screw Dia.	10mm
Impact Frequency	0-32000/min
No-load Speed	1st gear 0-500/min
	2nd gear 0-2000/min
Max. Drilling Dia.	Steel Φ13mm
	Brick Wall Φ13mm
	Wood Φ45mm
Torque Setting	24+2
Max. Torque	120N.m
Net Weight	2.2/2.2/1.6kg

(Type EM) 4.0Ahx2, 2A Charger (Type FK) 5.0Ahx2, 4A Charger
(Type Z) Solo, Color Box Packing

Features
1. Brushless motor, delivering up to 120N.m of torque and 2000/min no-load speed;
2. 24+2 torque setting, for a variety of applications;
3. 13mm (1/2") Ratchet metal chuck,sturdy and durable;
4. 2-speed adjustment,high torque for screw driving,high speed for drilling.

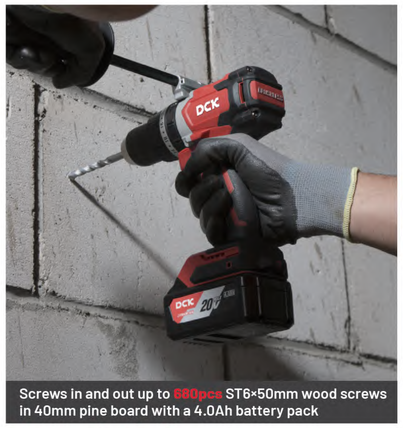

Screws in and out up to 680pcs ST6×50mm wood screws in 40mm pine board with a 4.0Ah battery pack

Accessories & Package
•Auxillary Handle • Belt Clip • Plastic Case Packing (Except Type Z)

KDJZ20160i(TYPE FK/EM/Z)

20V MAX

CORDLESS BRUSHLESS DRIVER/ HAMMER DRILL

BRUSHLESS MOTOR



DSC

Battery	20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Chucking Capacity	13mm
Max. Power Output	1000W
No-load Speed	1st gear 0-500/min
	2nd gear 0-2100/min
Rated Impact Frequency	0-33600/min
Max. Drilling Dia.	Steel Φ13mm
	Brick wall Φ16mm
	Wood Φ65mm
Torque Setting	19+2
Max. Torque	160N.m
Net Weight	2.4/2.4/1.8kg

(Type EM) 4.0Ahx2, 2A Charger (Type FK) 5.0Ahx2, 4A Charger
(Type Z) Solo, Color Box Packing

Features
1. Brushless motor, delivering up to 160N.m of torque and 2100/min no-load speed;
2. 19+2 torque setting, for a variety of applications;
3. 13mm (1/2") Ratchet metal chuck, sturdy and durable;
4. DSC: Safety Control Technology, protecting the machine and user when the drill bit gets stuck;
5. Self-Tapping Mode, soft start for accurate positioning.



Drills up to 50pcs Φ35mm holes with Hinge boring bit in 40mm pine board with a 4.0Ah battery pack

Accessories & Package
• Auxillary Handle • Driver Bit • Belt Cilp • Plastic Case Packing (Except Type Z)

*Specifications may differ from country to country.

KDZC04-24(TYPE FK/EM/Z)

20V MAX

CORDLESS BRUSHLESS ROTARY HAMMER

BRUSHLESS MOTOR



Battery	20V MAX/5.0Ahx2/4.0Ah×2/Solo
Max. Power Output	500W
Impact Energy	2.8J
No-load Speed	0-1000/min
Rated Impact Frequency	0-4500/min
Max. Drilling Capacity	Concrete Φ24mm
	Steel Φ13mm
	Wood Φ28mm
Net Weight	3.2/3.2/2.6kg

(Type FK)5.0Ahx2, 4ACharger
(Type EM)4.0Ahx2, 2ACharger
(Type Z)Solo, Color Box Packing

Features

1. Brushless motor;
2. 3-Mode operation, Drill, rotary hammer and demolition;
3. Stepless speed adjustment, Applicable to different working conditions;
4. Double safety protection, Mechanical clutch and overcurrent protection.



Drills up to 48pcs Φ8×70mm holes in C40 concrete with a 4.0Ah battery pack

Accessories & Package

• Auxiliary Handle • Depth Gauge • Plastic Case Packing (Except Type Z)

KRH20V-26(TYPE R2K/H2K/Z)

20V MAX

CORDLESS BRUSHLESS ROTARY HAMMER

BRUSHLESS MOTOR



HEAVY DUTY

DVR DSC

Battery	20V MAX/8.0Ahx2/6.0Ah×2/Solo
Max. Power Output	750W
Impact Energy	2.8J
No-load Speed	0-1125/min
Rated Impact Frequency	0-5100/min
Max. Drilling Capacity	Concrete Φ26mm
Net Weight	4.3/4.2/3.1kg

(Type R2K)8.0Ahx2,4ACharger, Battery packs sold separately
(Type H2K)6.0Ahx2,4ACharger, Battery packs sold separately
(Type Z)Solo,Color Box Packing

Features

1. DSC Safety control technology, Mechanical clutch and electronic sprain protection;
2. Quick change chunk;
3. 3-Mode operation, Drill, rotary hammer and demolition;
4. Dust e×tractor unit, Connect to KDE20V-16.



Drills up to 87pcs Φ10×70mm holes in C40 concrete with a 8.0Ah battery charge

Accessories & Package

• Grease • Oil Absorber Cloth • Auxiliary Handle • Depth Gauge
• Plastic Case Packing (Except Type Z)

KDE20V-16

DUST EXTRACTOR



Max. speed output	21000rpm
Max. working stroke	130mm
Dust collection box capacity	240cm³
Max. drilling diameter	16mm
No-load current	3.2A
L x W x H	396x88x240mm
Net weight	1.2kg

Features

1. Be used with KRH20V-26;
2. Virtually dustless: drilling: 97% dust collection rate;
3. 130mm maximum drilling depth;
4. 240cm³ effective dust collection volume.



Accessories & Package

• Color Box Packing



KRH20V-26

(TYPE R2K/H2K/Z)

CORDLESS BRUSHLESS ROTARY HAMMER

BRUSHLESS MOTOR

HEAVY DUTY

DVR DSC

Drills up to 87pcs Φ10×70mm holes in C40 concrete with a 8.0Ah battery charge



QUICK CHANGE CHUCK

DSC

MECHANICAL CLUTCH AND ELECTRONIC SPRAIN PROTECTION



DVR: VIBRATION REDUCTION TECHNOLOGY
improving operation comfort



DUST EXTRACTOR UNIT
achieving dust-free drilling (extra purchase required)



LONG WORKING LIFE
for excellent power control and runtime management

*Specifications may differ from country to country.

A GOOD PARTNER FOR HEAVY-DUTY AND OUTDOOR WORK

20V MAX

YouTube Watch the video



KRH20V-28 (TYPE R2K/H2K/Z)

CORDLESS BRUSHLESS ROTARY HAMMER

BRUSHLESS MOTOR

HEAVY DUTY

DVR DSC

Drills up to 45pcs Φ16×70mm holes in C40 concrete with a 8.0Ah battery charge



3-MODE OPERATION
drill, rotary hammer and demolition



QUICK CHANGE CHUCK

DSC
MECHANICAL CLUTCH AND ELECTRONIC SPRAIN PROTECTION



DVR: VIBRATION REDUCTION TECHNOLOGY
improving operation comfort

4.7kg

4.7kg (WITH AN 8.0AH BATTERY) LIGHTWEIGHT BODY
making it easy to work on top and outdoors

KRH20V-28(TYPE R2K/H2K/Z)

20V MAX

CORDLESS BRUSHLESS ROTARY HAMMER

BRUSHLESS MOTOR



Battery	20V MAX/8.0Ahx2/6.0Ah×2/Solo
Max. Power Output	850W
Impact Energy	3.6J
No-load Speed	0-780/min
Rated Impact Frequency	0-4500/min
Max. Drilling Capacity	Concrete Φ28mm
Net Weight	4.7/4.6/3.5kg

(Type R2K)8.0Ahx2,4ACharger, Battery packs sold separately
(Type H2K)6.0Ahx2,4ACharger, Battery packs sold separately
(Type Z)Solo,Color Box Packin

HEAVY DUTY DVR DSC

Features

1. Brushless motor;
2. DSC: Safety control technology, mechanical clutch and electronic sprain protection;
3. Quick change chuck;
4. 3-Mode operation, Drill, rotary hammer and demolition.



YouTube Watch the video

Drills up to 45pcs Φ16×70mm holes in C40 concrete with a 8.0Ah battery charge

Accessories & Package

• Grease • Oil Absorber Cloth • Auxiliary Handle • Depth Gauge
• Plastic Case Packing(Except Type Z)

KAG20V-100(TYPE H2K/FK/EM/Z)

20V MAX

CORDLESS BRUSHLESS ANGLE GRINDER

NEW COMING SOON

Battery	20V MAX/6.0Ahx2/5.0Ah×2/4.0Ah×2/Solo
Max. Power Input	1000W
Max. Wheel Dia.	Φ100mm
Rated Speed	4000/6500/9000/min
Spindle Thread	M10
Net Weight	2.8/2.5/2.5/1.9kg

(Type H2K)6.0Ah×2,4A charger, Battery packs sold separately
(Type FK)5.0Ah×2,4A charger
(Type EM)4.0Ah×2,2A charger
(Type Z)Solo ,Color Box Packing

DSC STOP BRUSHLESS MOTOR

Features

1. 1000W powerful brushless motor, efficient and high overload resistance;
2. Multiple safety protections, Kickback control, Drop control, Overload restart control, Electronic brake;
3. 3-speed electronic gear shift, 4000/6500/9000/min, meeting different working conditions;
4. Tool-less adjustment guard, easy to adjust the angle of the guard.



Up to 100 cuts of Φ12mm rebar with a 6.0 Ah battery pack

Accessories & Package

• Auxiliary Handle • Wrench • Tool-free Adjustment Guard
• Plastic Case Packing(Except Type Z)

KAG20V-115(TYPE H2K/FK/EM/Z)

20V MAX

CORDLESS BRUSHLESS ANGLE GRINDER

NEW COMING SOON



Battery	20V MAX/6.0Ahx2/5.0Ah×2/4.0Ah×2/Solo
Max. Power Input	1000W
Max. Wheel Dia.	Φ115mm
Rated Speed	4000/6500/9000/min
Spindle Thread	M14
Net Weight	2.9/2.6/2.6/2.0kg

(Type H2K)6.0Ah×2,4A charger, Battery packs sold separately
(Type FK)5.0Ah×2,4A charger
(Type EM)4.0Ah×2,2A charger
(Type Z)Solo ,Color Box Packing

DSC STOP BRUSHLESS MOTOR

Features

1. 1000W powerful brushless motor, efficient and high overload resistance;
2. Multiple safety protections, Kickback control, Drop control, Overload restart control, Electronic brake;
3. 3-speed electronic gear shift, 4000/6500/9000/min, meeting different working conditions;
4. Tool-less adjustment guard, easy to adjust the angle of the guard.



Up to 100 cuts of Φ12mm rebar with a 6.0 Ah battery pack

Accessories & Package

• Auxiliary Handle • Wrench • Tool-free Adjustment Guard
• Plastic Case Packing(Except Type Z)

*Specifications may differ from country to country.

A STEP FURTHER IN EFFICIENCY

20V MAX



NEW COMING SOON

KAG20V-100 /115/125

(TYPE H2K/FK/EM/Z)

CORDLESS BRUSHLESS ANGLE GRINDER

BRUSHLESS MOTOR

STOP

DSC

Up to 100 cuts of Φ12mm rebar with a 6.0 Ah battery pack

1000W POWERFUL BRUSHLESS MOTOR
efficient and high overload resistance

3-SPEED ELECTRONIC GEAR SHIFT 4000/6500/9000/min
meeting different working conditions

TOOL-LESS ADJUSTMENT GUARD
easy to adjust the angle of the guard

MULTIPLE SAFETY PROTECTIONS

kickback control | drop control | overload restart control | electronic brake

RUBBERIZED SLIM HANDLE DESIGN
comfortable to hold

DETACHABLE METAL DUSTPROOF FILTER
convenient for cleaning

KAG20V-125(TYPE H2K/FK/EM/Z)

20V MAX

CORDLESS BRUSHLESS ANGLE GRINDER

NEW COMING SOON



Battery	20V MAX/6.0Ahx2/5.0Ahx2/4.0Ahx2/Solo
Max. Power Input	1000W
Max. Wheel Dia.	Φ125mm
Rated Speed	4000/6500/9000/min
Spindle Thread	M14
Net Weight	2.9/2.6/2.6/2.0kg

(Type H2K) 6.0Ah×2,4A charger, Battery packs sold separately
(Type FK) 5.0Ah×2,4A charger
(Type EM) 4.0Ah×2,2A charger
(Type Z) Solo ,Color Box Packing

DSC BRUSHLESS MOTOR STOP

Features

1. 1000W powerful brushless motor, efficient and high overload resistance;
2. Multiple safety protections, Kickback control, Drop control, Overload restart control, Electronic brake;
3. 3-speed electronic gear shift, 4000/6500/9000/min, meeting different working conditions;
4. Tool-less adjustment guard, easy to adjust the angle of the guard.



Up to 100 cuts of Φ12mm rebar with a 6.0 Ah battery pack

Accessories & Package

- Auxiliary Handle • Wrench • Tool-free Adjustment Guard
- Plastic Case Packing (Except Type Z)

KDSM04-100P(TYPE H2K/FK/EM/Z)

20V MAX

CORDLESS BRUSHLESS ANGLE GRINDER

NEW



Battery	20V MAX/6.0Ahx2/5.0Ahx2/4.0Ahx2/Solo
Max. Power Input	1000W
Max. Wheel Dia.	Φ100mm
Rated Speed	4000/6500/9000/min
Spindle Thread	M10
Net Weight	2.8/2.5/2.5/1.9kg

(Type H2K) 6.0Ah×2,4A charger, Battery packs sold separately
(Type FK) 5.0Ah×2,4A charger
(Type EM) 4.0Ah×2,2A charger
(Type Z) Solo ,Color Box Packing

DSC BRUSHLESS MOTOR STOP

Features

1. 1000W powerful brushless motor, efficient and high overload resistance;
2. Multiple safety protections, kickback control, overload restart control, electronic brake;
3. 3-speed electronic gear shift , 4000/6500/9000/min, meeting different working conditions;
4. Paddle switch, effectively protecting the safety of the operators.



Up to 100 cuts of Φ12mm rebar with a 6.0 Ah battery pack

Accessories & Package

- Auxiliary Handle • Wrench • Tool-free Adjustment Guard
- Plastic Case Packing (Except Type Z)

KDSM04-115P(TYPE H2K/FK/EM/Z)

20V MAX

CORDLESS BRUSHLESS ANGLE GRINDER

NEW




Battery	20V MAX/6.0Ahx2/5.0Ahx2/4.0Ahx2/Solo
Max. Power Input	1000W
Max. Wheel Dia.	Φ115mm
Rated Speed	4000/6500/9000/min
Spindle Thread	M14
Net Weight	2.9/2.6/2.6/2.0kg

(Type H2K) 6.0Ah×2,4A charger, Battery packs sold separately
(Type FK) 5.0Ah×2,4A charger
(Type EM) 4.0Ah×2,2A charger
(Type Z) Solo ,Color Box Packing

DSC BRUSHLESS MOTOR STOP

Features

1. 1000W powerful brushless motor, efficient and high overload resistance;
2. Multiple safety protections, kickback control, overload restart control, electronic brake;
3. 3-speed electronic gear shift , 4000/6500/9000/min, meeting different working conditions;
4. Paddle switch, effectively protecting the safety of the operators.

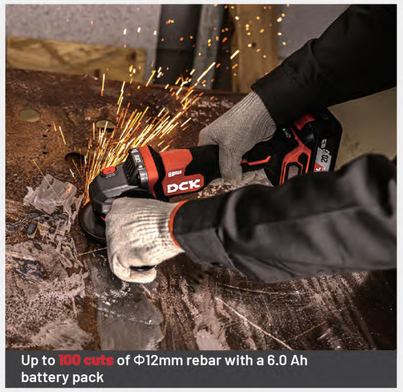

Up to 100 cuts of Φ12mm rebar with a 6.0 Ah battery pack

Accessories & Package

- Auxiliary Handle • Wrench • Tool-free Adjustment Guard
- Plastic Case Packing (Except Type Z)

*Specifications may differ from country to country.

KDSM04-125P(TYPE H2K/FK/EM/Z)

20V MAX

CORDLESS BRUSHLESS ANGLE GRINDER

NEW



Battery	20V MAX/6.0Ah×2/5.0Ah×2/4.0Ah×2/Solo
Max. Power Input	1000W
Max. Wheel Dia.	Φ125mm
Rated Speed	4000/6500/9000/min
Spindle Thread	M14
Net Weight	2.9/2.6/2.6/2.0kg

(Type H2K) 6.0Ah×2,4A charger, Battery packs sold separately
(Type FK) 5.0Ah×2,4A charger
(Type EM) 4.0Ah×2,2A charger
(Type Z) Solo ,Color Box Packing

DSC BRUSHLESS MOTOR

Features

1. 1000W powerful brushless motor, efficient and high overload resistance;
2. Multiple safety protections, kickback control, overload restart control, electronic brake;
3. 3-speed electronic gear shift , 4000/6500/9000/min, meeting different working conditions;
4. Paddle switch, effectively protecting the safety of the operators.



Up to 100 cuts of Φ12mm rebar with a 6.0 Ah battery pack

Accessories & Package

• Auxiliary Handle • Wrench • Tool-free Adjustment Guard
• Plastic Case Packing (Except Type Z)

KDSP02-180(TYPE FK/BM/Z)

20V MAX

CORDLESS BRUSHLESS POLISHER

NEW



Battery	20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output	600W
No-load Speed	500-3000 /min
Wheel Size	Φ180mm
Speed Mode	1-2-3-4-5-6
Spindle Thread	M14/ 5/8"-11UNC
Net Weight	2.1/2.1/1.5kg

(TYPE FK) 5.0Ah×2,4A charger
(Type BM) 4.0Ah×2,2A charger
(Type Z) Solo ,Color Box Packing

BRUSHLESS MOTOR

Features

1. 600W Max. output power;
2. 6- speed adjustment, meeting different working requirements;
3. Electronic constant speed, for uniform polishing ;
4. Soft start function, effectively protecting the safety of operators.



Polishs iron plate for up to 12 minutes in 6th speed gear with sponge disk with a 4.0Ah battery pack

Accessories & Package

• Backing Plate • Polishing Sponge • Auxiliary Handle
• Hex Wrench • Color Box Packing

KDMY125(TYPE FK/BM/Z)

20V MAX

CORDLESS BRUSHLESS CIRCULAR SAW



Battery	20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output	800W
No-load Speed	Low 4200/min
	High 6700/min
Blade Dia.	Φ125mm
Blade Bore	Φ20 mm
Max.Cutting Capacity	0° 45mm
	45° 33mm
Max.Cutting Angle	45°
Net Weight	2.4/2.4/1.8kg

(Type FK) 5.0Ah×2, 4A Charger , Color Box Packing
(Type BM) 4.0Ah×2, 2A Charger, Color Box Packing
(Type Z) Solo, Color Box Packing

BRUSHLESS MOTOR

Features

1. 6700/min Max. no-load speed, for efficient cutting;
2. 2.4kg lightweight body (with a 4.0Ah battery);
3. Parallel structure design, labor-saving and efficient;
4. Adjustable 0-45° cutting angle.



Up to 67 cuts of 1200×13mm plywood with a 4.0Ah battery pack

Accessories & Package

• Saw Blade • Hex Wrench • Fixing Plate • Color Box Packing

LIGHT WEIGHT STRUCTURE, EASY TO USE WITH ONE HAND

20V MAX



KDMY140S (TYPE FK/EM/Z)

CORDLESS BRUSHLESS CIRCULAR SAW

STOP BRUSHLESS MOTOR

Up to 95 cuts of 200×40mm pine board with a 4.0Ah battery pack

800W POWERFUL MOTOR
for efficient cutting

51 mm
0-51mm ADJUSTABLE CUTTING DEPTH

H L MODE
2 SPEED ADJUSTMENT



0-45° ADJUSTABLE CUTTING ANGLE
for various machining requirements



PARALLEL STRUCTURE DESIGN
labor-saving and efficient



LED WORKING LIGHT

*Specifications may differ from country to country.

KDMY140S(TYPE FK/EM/Z)

20V MAX

CORDLESS BRUSHLESS CIRCULAR SAW



Battery	20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output	800W
No-load Speed	Low 4200/min
	High 6700/min
Blade Dia.	Φ140mm
Blade Bore	Φ20 mm
Max.Cutting Capacity	0° 51mm
	45° 35mm
Max.Cutting Angle	45°
Net Weight	2.3/2.3/1.7kg

(Type FK) 5.0Ah×2, 4A Charger , Color Box Packing
(Type EM) 4.0Ah×2, 2A Charger, Color Box Packing
(Type Z) Solo, Color Box Packing

BRUSHLESS MOTOR

Features

1. 800W powerful motor, for efficient cutting;
2. Parallel structure design, labor-saving and efficient;
3. 0-51mm adjustable cutting depth;
4. 2-speed adjustment.



Up to 85 cuts of 200×40mm pine board with a 4.0Ah battery pack

Accessories & Package

• Saw Blade • Hex Wrench • Fixing Plate • Color Box Packing

RECOMMENDED ACCESSORIES

SUITABLE FOR CORDLESS CIRCULAR SAW



Suitable for cordless circular saw
. longer life
. higher efficiency
. higher precision

TCT Saw Blade(Sharp Type)						Packing	Product Code
Diameter	Tooth Thickness (mm)	Aperture(mm)	Number of Teeth	Tooth Shape	Application Scenarios	PCS/CTN	
125(5")	1.5	20	24T	ATB	Wood	100	30570600056
140(5-1/2")	1.6	20	24T	ATB	Wood	100	30570600095
165(6-1/2")	1.5	20	24T	ATB	Wood	50	30570600054
185(7")	1.6	20	24T	ATB	Wood	50	30570600055

KDMY165S(TYPE FK/BM/BDM/Z)

20V MAX

CORDLESS BRUSHLESS CIRCULAR SAW

NEW



Battery	20V MAX/5.0Ah×2/4.0Ah×2/4.0Ah×1/Solo
Max. Power Output	840W
No-load Speed	5000/min
Blade Dia.	Φ165mm
Blade Bore	Φ20 mm
Max.Cutting Capacity	0° 59mm
	45° 43mm
	50° 39mm
Max.Cutting Angle	50°
Net Weight	3.8/3.8/3.8/3.2kg

(Type FK) 5.0Ah×2, 4A Charger, Color Box Packing
(Type BM) 4.0Ah×2, 2A Charger, Color Box Packing
(Type BDM) 4.0Ah×1, 2A Charger, Color Box Packing
(Type Z) Solo, Color Box Packing

BRUSHLESS MOTOR

Features

1. 840W powerful brushless motor, Delivering efficient cutting;
2. 0-50° Adjustable bevel cutting angle, For various machining requirements;
3. Rubberized handle, comfortable to hold;
4. 0-59 mm adjustable cutting depth.



Up to 100 cuts of 200×40mm pine board with a 4.0Ah battery pack

Accessories & Package

• Hex Wrench • Fixing Plate • Saw Blade (Type Z:not included)
• Color Box Packing

KDJF15(TYPE EK/Z)

12V

CORDLESS SABRE SAW



Battery	12V MAX/2.0Ah×2/Solo
Max. Power Output	150W
Stroke Length	14.5mm
Max. Cutting Depth	Metal 8mm
	Wood 65mm
	Pipe Φ50mm
No-load Strokes	0-3000/min
Net Weight	1.2/1.0kg

(Type EK) 2.0Ah×2, 3A Charger
(Type Z) Solo, Color Box Packing

Features

1. Brushless motor, delivering up to 3000/min no-load speed;
2. Stepless speed adjustment, applicable to different working conditions;
3. Tool-less blade change system, for convenient blade insertion and ejection;
4. One-handed operation design, well balanced and easy to control;
5. Efficient heat dissipation air vents, effectively extending the lifetime of products.



Up to 6 cuts of 200×40mm pine board with a 2.0Ah battery pack

Accessories & Package

BIM Saw Blade (Metal) • HCS Saw Blade (wood)
• Plastic Case Packing (Except Type Z)

KDMY02-185(TYPE FK/BM/DM/Z)

20V MAX

CORDLESS BRUSHLESS CIRCULAR SAW



Battery	20V MAX/5.0Ah×2/4.0Ah×2 /4.0Ah×1/Solo
Max. Power Output	850W
No-load Speed	5000/min
Blade Dia.	Φ185mm
Blade Bore	Φ20 mm
Max.Cutting Capacity	0° 65mm
	45° 45mm
Max.Cutting Angle	45°
Net Weight	4.1/4.1/4.1/3.5kg

(Type FK) 5.0Ah×2, 4A Charger, Color Box Packing
(Type BM) 4.0Ah×2, 2A Charger, Color Box Packing
(Type DM) 4.0Ah×1, 2A Charger, Color Box Packing
(Type Z) Solo, Color Box Packing

BRUSHLESS MOTOR

Features

1. 850W powerful brushless motor, for efficient cutting;
2. 0-65mm adjustable cutting depth;
3. Aluminum alloy die-casting baseplate, sturdy and durable;
4. Rubberized handle, comfortable to hold.



Up to 100 cuts of 200×40mm pine board with a 4.0Ah battery pack

Accessories & Package

• Hex Wrench • Fixing Plate • Saw Blade (TYPE Z: Not Included)
• Color Box Packing

KDJF32(TYPE FK/EM/Z)

20V MAX

CORDLESS BRUSHLESS RECIPROCATING SAW

NEW



Battery	20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output	900W
No-load Speed	0-2800 /min
Length of Strokes	32mm
Max. Cutting Depth	Steel 20mm
	Wood 255mm
	Pipe Φ130mm
Base Plate Adjustment	3
Net Weight	3.9/3.9/3.3kg

(Type FK) 5.0Ahx2, 4A Charger
(Type EM) 4.0Ahx2, 2A Charger
(Type Z) Solo, Color Box Packing

BRUSHLESS MOTOR

Features

1. Brushless motor, delivering up to 2800/min no-load speed;
2. Tool-less blade change system, for convenient blade insertion and ejection;
3. 4 orbital-action settings, for increased cutting performance;
4. Adjustable Base Plate, applicable to different working conditions;
5. Two-finger trigger switch, easy to operation.



Up to 85 cuts of 200×40mm pine board with a 4.0Ah battery pack

Accessories & Package

• BIM Saw Blade (Metal) • HCS Saw Blade (wood)
• Plastic Case Packing (Except Type Z)

*Specifications may differ from country to country.

KRS20V-22S(TYPE FK/EM/DM/Z)

20V MAX

CORDLESS BRUSHLESS RECIPROCATING SAW

NEW COMING SOON · BRUSHLESS MOTOR · D-SVC



Adjustable Base Plate
ensures cutting efficiency

Tool-less blade change system
for fast, convenient blade insertion and ejection

BRUSHLESS MOTOR
Brushless motor
delivering up to 3000/min no-load speed

Stepless speed adjustment
applicable to different working conditions



One-handed operation design
well balanced and easy to control

D-SVC
SVC: super vibration control technology
effectively reducing the fatigue of the operators



Up to **45 cuts** of 200×40mm pine board with a 4.0Ah battery pack


Accessories & Package

• Blade(Metal) • Plastic Case Packing(Except Type Z)

Battery	20V MAX/5.0Ah×2/4.0Ah×2
	/4.0Ah×1/Solo
Max. Power Output	450W
Stroke Length	22mm
Max. Cutting Depth	Metal 15mm
	Wood 180mm
	Pipe Φ100mm
No-load Strokes	0-3000/min
Net Weight	2.4/2.4/2.4/1.8kg

(Type FK)5.0Ahx2, 4A Charger
(Type EM)4.0Ahx2, 2A Charger
(Type DM)4.0Ahx1, 2A Charger
(Type Z)Solo, Color Box Packing

No-load reciprocating vibration frequency

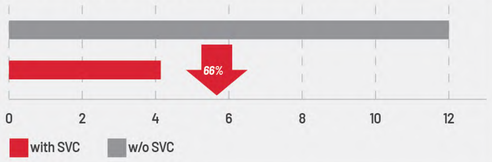

KDJJ1.6(TYPE AM/Z)

20V MAX

CORDLESS BRUSHLESS METAL SHEAR



Battery	20V MAX/2.0Ah×2/Solo
MAX. Power Output	400W
No-load Speed	0-2500/min
Shearing Capacity	Aluminium 1.6mm
	Stainless Steel 0.8mm
Net Weight	1.7/1.4kg

(Type AM)2.0Ahx2, 2A Charger
(Type Z)Solo, Color Box Packing

BRUSHLESS MOTOR

Features

1. Brushless motor;
2. Max. cutting capacity of 1.6 mm in aluminum;
3. Stepless speed adjustment, applicable to different working conditions;
4. High-quality cutting blade, sharp and durable.



Up to **115 cuts** of 1m×0.4mm iron plate with a 2.0Ah battery pack

Accessories & Package

• Allen key(4mm*1/2.5mm*1) • Plastic Case Packing(Except Type Z)

KDJJ2.5(TYPE BM/Z)

20V MAX

CORDLESS BRUSHLESS METAL SHEAR




Battery	20V MAX/4.0Ah×2/Solo
MAX. Power Output	700W
No-load Speed	1500/min
Shearing Capacity	Aluminium 3.2mm
	Stainless steel 2.5mm
Net Weight	2.8/2.2kg

(Type BM)4.0Ahx2, 2A Charger
(Type Z)Solo, Color Box Packing

BRUSHLESS MOTOR

Features

1. 700W high quality motor;
2. Max. cutting capacity of 2.5 mm in aluminum;
3. Large hand guard, for ma×imum safety in cutting direction;
4. High strength aluminum gear box, robust and durable;
5. High-quality cutting blade, sharp and durable.

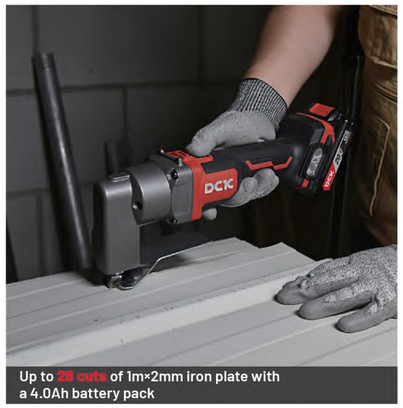

Up to **28 cuts** of 1m×2mm iron plate with a 4.0Ah battery pack

Accessories & Package

• Hex key(4mm×1) • Thickness Gauge • Color Box Packing

KDMQ85(TYPE FK/EM/EDM/Z)

20V MAX

CORDLESS BRUSHLESS JIG SAW



Battery	20V MAX/5.0Ah×2/4.0Ah×2/4.0Ah×1/Solo
Max. Power Output	420W
No-load Speed	800-3500/min
Length of Strokes	26mm
Max. Cutting Depth	Steel 10mm
	Aluminium 20mm
	Wood 120mm
Max. Cutting Angle	45°
Net Weight	2.8/2.8/2.8/2.2kg

(Type FK)5.0Ahx2, 4A Charger
(Type EM)4.0Ahx2, 2A Charger
(Type EDM)4.0Ahx1, 2A Charger
(Type Z)Solo, Color Box Packing

BRUSHLESS MOTOR

Features

1. Brushless motor, high-efficiency, powerful and durable;
2. 6-speed adjustment, applicable to different working conditions;
3. Tool-less blade change system, for faster blade installation and removal;
4.4 orbital-action settings, for increased cutting performance.



Up to **65 cuts** of 200×40mm pine board with a 4.0Ah battery pack

Accessories & Package

• Saw Blade(2pcs)(T144D, T118A) • Plastic Case Packing(Except Type Z)

KDMP6(TYPE FK/BM/Z)

20V MAX

CORDLESS BRUSHLESS TRIMMER

NEW



Battery	20V MAX/5.0Ah×2/4.0Ah×2/Solo
MAX. Power Output	600W
No-load Speed	10000-30000/min
Collet Size	Φ6-Φ8mm
Net Weight	2.1/2.1/1.5kg

(Type FK)5.0Ahx2, 4A Charger
(Type EM)4.0Ahx2, 2A Charger
(Type Z)Solo, Color Box Packing

BRUSHLESS MOTOR

Features

1. 6 Speed adjustment: Applicable to different working conditions;
2. Brushless motor;
3. Flashing alarm for malfunctions;
4. Multiple optional bases;
5. Connected to dust collection system: for dust-free working.



Cutting 1.22 m*18 mm multilayer board up to **12 segments** on one 4.0Ah battery charge

Accessories & Package

• Open-end Wrench 22mm • Open-end Wrench 9/13mm • Socket Wrench 8mm • Straight Guide • Templet Guide • Trimmer Guide Assembly • Square Base Plate • Dust Cap • Tool Carrying Bag (Except TYPE Z) • Color Box Packing

*Specifications may differ from country to country.

KDMD20(TYPE FK/EM/DM/Z)

20V MAX

CORDLESS BRUSHLESS OSCILLATING MULTI-TOOL

BRUSHLESS MOTOR



Tool-less blade change system
for convenient blade insertion and ejection



6-speed adjustment
applicable to different working conditions



Brushless motor
high efficiency,
powerful and durable



Up to **34 cuts** of 300×18mm pine board with a 4.0Ah battery pack

Accessories & Package

• Cut Saw Blade BIM&HCS (2pcs) • Segment Saw Blade • Scraper • Sanding Plate • Abrasive Paper (15pcs) • Plastic Case Packing (Except Type Z)

Battery	20V MAX/5.0Ah×2/4.0Ah×2/2.0Ah×1/Solo
Max. Power Output	400W
Oscillations Frequency	6000-18000/min
Oscillation Angle	3.2°
Net Weight	2.0/2.0/1.7/1.4kg

(Type FK) 5.0Ahx2, 4A Charger
(Type EM) 4.0Ahx2, 2A Charger
(Type DM) 2.0Ahx1, 2A Charger
(Type Z) Solo, Color Box Packing

RECOMMENDED ACCESSORIES

SUITABLE FOR CORDLESS CIRCULAR SAW



HCS Plunge Cut Saw Blade (wood) ——32mm(1-1/4")
Suitable for cutting wood and PVC pipes
Product Code: 30572600010



BIM Plunge Cut Saw Blade (wood and Soft Metal)——32mm(1-1/4")
Suitable for cutting wood and soft metals
Product Code: 30572600001



Sanding Plate——Φ88mm
Connecting Oscillating Multi-tool and Sanding Sheet
Product Code: 30572600004



HM Seg Saw Blade——Φ85mm(3-1/4")
Routing joints on wall and floor tiles
Removing mortar or tile adhesive
Product Code: 30572600003



Scraper——51×26mm
Removing mortar or tile adhesive
Removing mortar and concrete residues
Removing hard, brittle carpet adhesive residues
Product Code: 30572600002



Sanding Sheet ——(p60/p80/p100/p120/p240)
Suitable for sanding wood and wooden materials
Product Code:
P60: 30572600005 P120: 30572600008
P80: 30572600006 P240: 30572600009
P100: 30572600007

KDVC800(TYPE DM/Z)

20V MAX

CORDLESS BRUSHLESS VACUUM CLEANER

BRUSHLESS MOTOR



Battery	20V MAX/4.0Ah×1/Solo
Max. Power Output	200W
Capacity	8L(water：3L)
Max. Vacuum Pressure	16kPa
Net Weight	3.2/2.6kg

(Type DM) 4.0Ah×1, 2.0A Charger, Color Box Packing
(Type Z) Solo, Color Box Packing

Features

1. 16kPa Max. vacuum pressure, for powerful suction;
2. HEPA filter, for 99.97% dust filtration rate;
3. 2-speed control, meeting different working conditions;
4. Intelligent water fullness monitoring and automatic shutdown, to protect the machine.



Runs up to **40 minutes** in Ⅰ mode or **20 minutes** in Ⅱ mode with a 4.0Ah battery pack

Accessories & Package

• Flexible Pipe • Shoulder Strap • Wide Suction Nozzle
• Flat Suction Nozzle • Flexible Tube Holder • Color Box Packing

KDQW2058(TYPE BDM/Z)

20V MAX

CORDLESS BRUSHLESS PRESSURE WASHER

NEW BRUSHLESS MOTOR



Battery	20V MAX/4.0Ah×1/Solo
Max. Power Output	500W
Max. Pressure	58bar / 841psi
Rated Pressure	39bar / 566psi
Max. Pulsation Flow	3.9L/min / 1gpm
Rated Flow	2.3L/min / 0.6gpm
Net Weight	2.8/2.2kg

(Type BDM) 4.0Ah×1, 2.0A Charger, Color Box Packing
(Type Z) Solo, Color Box Packing

Features

1. Brushless outer rotor motor, high-efficiency, powerful and durable;
2. 4 modes, offering dedicated cleaning modes for cars, motorcycles, fences or bicycles;
3. Intelligent digital display, real-time pressure and battery monitoring.



Runs up to **15min** in car mode with a 4.0Ah battery pack

Accessories & Package

• Long Lance • Soap Bottle • Inlet Pipe • Rotatable Fan Zozzle
• Color Box Packing

KDWL20B(TYPE Z)

20V MAX

CORDLESS LED WORK LIGHT

NEW



Battery	20V MAX/Solo
Rated Power	30W
Color Temperature	6500K
Net Weight	1.6kg

(Type Z) Solo, Color Box Packing

Features

1. 3000LM max. brightness, illuminates the working environment;
2. 3-mode brightness adjustment, meeting different working requirements;
3. 360° rotatable lampshade;
4. Flexibility of use: hanging or sitting on the countertop, widely use for various applications.



Runs up to **2.5 hours** in high mode, **3.5 hours** in middle mode or **7 hours** in low mode with a 4.0Ah battery pack

Accessories & Package

• Color Box Packing

KDML20081(TYPE FK/EM/DM/Z)

20V MAX

CORDLESS BRUSHLESS CHAIN SAW

BRUSHLESS MOTOR



Battery	20V MAX/5.0Ah×2/4.0Ah×2/4.0Ah×1 /Solo
Max. Power Output	700W
No-load Speed	10m/s
Max. Length of Guide Bar	200mm (8")
Net Weight	2.3/2.3/2.3/1.7kg

(Type FK) 5.0Ah×2, 4.0A Charger, Color Box Packing
(Type EM) 4.0Ah×2, 2.0A Charger, Color Box Packing
(Type DM) 4.0Ah×1, 2.0A Charger, Color Box Packing
(Type Z) Solo, Color Box Packing

Features

1. Brushless motor, high efficiency, powerful and durable;
2. 2.3kg light-weight and Ultra-compact body (with a 4.0Ah battery), comfortable to hold;
3. 10m/s max. chain speed.



Up to **42 cuts** of Φ100mm round pine wood with a 4.0Ah battery pack

Accessories & Package

• Oil Bottle Assembly • Saw Chain • Guide Bar • Bar Protector
• Color Box Packing

*Specifications may differ from country to country.

KDYD35S(TYPE AM/Z)

CORDLESS BRUSHLESS PRUNER

BRUSHLESS MOTOR

20V MAX

Brushless motor
powerful and efficient

SK5 steel blade and teflon coating process
sharp and durable,
non-stick and wear resistant



4-gear shearing capacity setting
applicable to different working conditions

Dual safety switch
preventing accidental start



Up to 2000 cuts of Φ15-25mm privet saplings with a 2.0Ah battery pack

Accessories & Package

• Wrench 13mm • Hex Wrench 5mm • Whetstone • Lubricating oil
• Blade Guard • Color Box Packing

Battery	20V MAX/2.0Ah×2/Solo		
Max. Power Output	450W		
Shearing Capacity	1st gear	Hard Branches	Φ20mm
		Soft Branches	Φ20mm
	2nd gear	Hard Branches	Φ25mm
		Soft Branches	Φ25mm
	3rd gear	Hard Branches	Φ25mm
		Soft Branches	Φ30mm
	4th gear	Hard Branches	Φ25mm
		Soft Branches	Φ35mm
Net Weight	1.3/1.0kg		

(Type AM) 2.0Ah×2, 2.0A Charger, Color Box Packing
(Type Z) Solo, Color Box Packing

KDCS20061(TYPE FK/BM/Z)

CORDLESS BRUSHLESS CHAIN SAW

NEW BRUSHLESS MOTOR

20V MAX

Automatic oil pumping system
effectively extending the lifetime of chain

750W powerful brushless motor
high efficiency, powerful and durable

Protective cover design
to blocking sawdust and protect users



1.8kg light-weight and Ultra-compact body (with a 4.0Ah battery)
for comfortable operation

Tool-free saw chain tensioning
for convenient operation and maintenance



Up to 275 cuts of 5×5cm square wood with a 4.0Ah battery pack.

Accessories & Package

• Oil Bottle • Saw Chain • Guide Bar • Bar Protector
• Color Box Packing

Battery	20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output	750W
No-load Speed	8m/s
Max. Length of Guide Bar	150mm(6")
Net Weight	1.8/1.8/1.2kg

(Type FK) 5.0Ah×2, 4.0A Charger, Color Box Packing
(Type BM) 4.0Ah×2, 2.0A Charger, Color Box Packing
(Type Z) Solo, Color Box Packing

KDCS20101(TYPE FK/BM/Z)

CORDLESS BRUSHLESS CHAIN SAW

20V MAX

NEW BRUSHLESS MOTOR



Battery	20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output	900W
No-load Speed	12m/s
Max. Length of Guide Bar	250mm (10")
Net Weight	2.6/2.6/2.0kg

(Type FK) 5.0Ah×2, 4.0A Charger, Color Box Packing
(Type BM) 4.0Ah×2, 2.0A Charger, Color Box Packing
(Type Z) Solo, Color Box Packing

Features

1. 900W powerful brushless motor;
2. 12m/s high chain speed, for efficient and smooth cutting;
3. Automatic oil pumping system, effectively extending the lifetime of the chain.
4. Tool-free saw chain tensioning, for convenient operation and maintenance.



Up to 68 cuts of 10×10mm square wood with a 4.0Ah battery pack

Accessories & Package

• Oil Bottle Assembly • Saw Chain • Guide Bar • Bar Protector
• Color Box Packing

KDCS20122(TYPE FK/BM/Z)

CORDLESS BRUSHLESS CHAIN SAW

20V MAX

NEW BRUSHLESS MOTOR



Battery	20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output	1100W
No-load Speed	15m/s
Max. Length of Guide Bar	300mm(12")
Net Weight	2.8/2.8/2.2kg

(Type FK) 5.0Ah×2, 4.0A Charger, Color Box Packing
(Type BM) 4.0Ah×2, 2.0A Charger, Color Box Packing
(Type Z) Solo, Color Box Packing

Features

1. Ultra-compact body and light-weight;
2. 15m/s max. chain speed for efficient cutting;
3. Tool-free saw chain tensioning, for convenient operation and maintenance;
4. Automatic oil pumping system to improve chain life;
5. Brake system, safe and reliable.



Up to 80 cuts of Φ100mm round pine wood with a 4.0Ah battery pack

Accessories & Package

• Oil Bottle • Saw Chain • Guide Bar • Bar Protector
• Color Box Packing

*Specifications may differ from country to country.

KDQF32(TYPE FK/BM/DM/Z)

20V MAX

CORDLESS BRUSHLESS BLOWER

BRUSHLESS MOTOR




Battery	20V MAX/5.0Ah×2/4.0Ah×2 /4.0Ah×1/Solo
Max. Power Output	380W
No-load Speed	Low 11000/min
	Middle 15000/min
	High 18000/min
Air Volume	Low 67CFM(1.9m³/min)
	Middle 92CFM(2.6m³/min)
	High 110CFM(3.11m³/min)
Net Weight	1.9/1.9/1.9/1.3kg

(Type FK)5.0Ah×2, 4A Charger, Color Box Packing
(Type BM)4.0Ah×2, 2A Charger, Color Box Packing
(Type DM)4.0Ah×1, 2A Charger, Color Box Packing
(Type Z)Solo, Color Box Packing

Features

1. Brushless outer rotor motor, powerful and durable;
2. 1.9kg compact and lightweight design (with a 4.0Ah battery);
3. Two functions: blowing and vacuuming;
4. 3-speed variable speed control, meeting different working conditions.

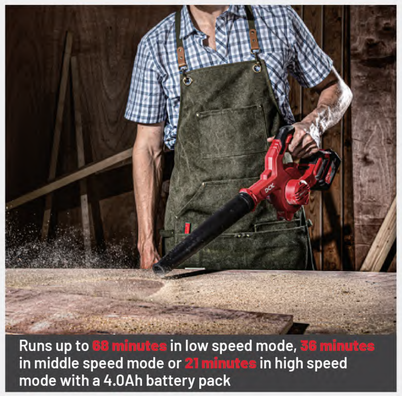

Runs up to 68 minutes in low speed mode, 36 minutes in middle speed mode or 21 minutes in high speed mode with a 4.0Ah battery pack

Accessories & Package

• Dust Extraction Connector • Blowpipe • Dust bag
• Color Box Packing

KDPJ12(TYPE EK/Z)

12V

CORDLESS CAULK GUN



Battery	12V MAX/2.0Ah×2/Solo
Max. Power Output	150W
Max. Pushing Force	3400N
Feed Speed	0-12.9mm/s
Stroke	213/355mm
Sealant Type	Cartridge 300ml
	Film Type Pack 600ml
Net Weight	1.85/1.65kg

(Type EK)2.0Ahx2, 3A Charger
(Type Z)Solo, Color Box Packing

Features

1. 6-speed adjustment, meeting different working requirements;
2. Powerful motor, delivering up to 3400N of pushing force;
3. 360° rotatable cartridge holder fits 300 ml cartridges;
4. Stepless speed trigger switch, optimizes flow rate from 0-12.9mm/s.



Dispenses up to 30 Gluing Tubes (300ml) with a 2.0Ah battery pack

Accessories & Package

• 600mL Sealant Pipe Holder • Suspension Strap
• Plastic Case Packing (Except Type Z)

KDLB20151(TYPE FDK/BM/Z)

20V MAX

CORDLESS BRUSHLESS BLOWER

NEW COMING SOON BRUSHLESS MOTOR



Battery	20V MAX/5.0Ah×1/4.0Ah×2/Solo
Max. power output	720W
Max. air speed	57m/s
Max. air volume	550CFM
Net weight	2.3/2.3/1.7kg

(Type FK)5.0Ah×2, 4.0A Charger, Color Box Packing
(Type BM)4.0Ah×2, 2.0A Charger, Color Box Packing
(Type Z)Solo, Color Box Packing

Features

1. Brushless outer rotor motor, high efficiency, powerful and durable;
2. 2.3kg lightweight design, for effortless operation (with a 4.0Ah battery);
3. Turbo mode and cruise control, for variety of cleaning tasks and maximum runtime management.



Runs up to 18 minutes in high speed mode with a 5.0Ah battery pack

Accessories & Package

• Tapered Nozzle • Curved Nozzle • Spread Nozzle
• Color Box Packing

KDGG500(TYPE DM/Z)

20V MAX

CORDLESS GREASE GUN



Battery	20V MAX/2.0Ah×1/Solo
Max. Power Output	260W
Max. Working Pressure	10000PSI
Oil Injection Rate	High gear 170g/min
	Low gear 110g/min
Length Of Hose	1000mm
Tank Capacity	500cc
Net Weight	3.6/3.2kg

(Type DM)2.0Ah×1, 2A Charger, Plastic Case Packing
(Type Z)Solo, Color Box Packing

Features

1. 10000PSI high pressure grease injection, powerful performance with effortless operation;
2. 500cc large capacity oil tank;
3. LCD display, intuitive display of working status;
4. 2-speed control, meeting different working conditions.



Dispenses up to 10 grease cartridges with a 2.0Ah battery pack

Accessories & Package

• Suspension Strap • Plastic Case Packing

KDPM50(TYPE EK/Z)

12V

CORDLESS BLIND RIVETING GUN



Battery	12V MAX/2.0Ah×2/Solo
Max. Power Output	150W
Stroke	20mm
Capacity	Φ2.4 - Φ5.0mm For All-purpose
	Φ2.4 - Φ6.0mm For Aluminum Blind Rivet
Max. Tension	10000N
Net Weight	1.6/1.4kg

(Type EK)2.0Ahx2, 3A Charger
(Type Z)Solo, Color Box Packing

Features

1. 20 mm stroke length, riveting in one stroke;
2. Mandrel collector, convenient collection and improved work efficiency;
3. Build-in battery indicator, increased user convenience;
4. Metal Gun Head design, sturdy and durable;
5. Efficient heat dissipation air vents, effectively extending the lifetime of product.



Up to 580pcs Φ5×13 aluminum rivets with a 2.0Ah battery pack

Accessories & Package

• Nosepiece (5pcs) • Mandrel Part • Magnetic Ring • Wrench
• Plastic Case Packing (Except Type Z)

KDQE120(TYPE DK/Z)

12V

CORDLESS GREASE GUN



Battery	12V MAX/2.0Ah×1/Solo
Rated Power	90W
No-load Speed	13000/min
Max. air pressure	8.3Bar
Net Weight	1.05/0.85kg

(Type DK)2.0Ah×1, 3.0A Charger, Color Box Packing
(Type Z)Solo, Color Box Packing

Features

1. Compact body, convenient to carry;
2. Intelligent digital display, real-time monitoring of air pressure;
3. Air nozzle storage area;
4. LED light, convenient to use in dark environment.



Inflates tire for up to 4pcs at 205/55R16 tyre (0-2.5Bar) with a 2.0Ah battery pack

Accessories & Package

• Ball Needle • Plastic Air Nozzle • Adaptor • Color Box Packing

*Specifications may differ from country to country.

KDKIT55(TYPE EK)

CORDLESS BRUSHLESS COMBO KIT

NEW BRUSHLESS MOTOR

12V





KDPL04-8

IMPACT DRIVER

1. Brushless motor,delivering up to 140N.m of torque;
2.125mm compact body,perfect control in narrow space.



KDJZ1250i

HAMMER DRILL

1. Brushless motor,delivering up to 50N.m of torque;
2.2-speed adjustment,0-500/0-1800/min,high torque for screw driving,high speed for drilling.

Accessories & Package

- 12V MAX Lithium-Ion Battery 2.0Ah×2 • 3A Charger
- Driver Bit(2pcs) • Belt Clip(2pcs) • D-STACK Stacking Box

KDKIT29(TYPE EK)

CORDLESS BRUSHLESS COMBO KIT

NEW BRUSHLESS MOTOR

20V MAX





KDPL208

IMPACT DRIVER

1. Brushless outer rotor motor,delivering up to 208N.m of torque;
2.107mm ultra compact body,perfect control in narrow space.



KDPB358

IMPACT WRENCH

1. Brushless motor,delivering to 358N.m fastening torque;
2.129mm compact body,perfect control in narrow space.

Accessories & Package

- 20V MAX Lithium-Ion Battery 4.0Ah×2 • 4A Charger • Belt Clip×2 • Driver Bit
- Sockets Assembly(S22) • D-STACK Stacking Box

KDKIT26(TYPE EK)

CORDLESS BRUSHLESS COMBO KIT

NEW BRUSHLESS MOTOR

20V MAX





KDJZ2060i

HAMMER DRILL

1. Brushless motor,delivering up to 60N.m of torque;
2.152mm compact body,perfect control in narrow space;
3. 20+2 Torque setting,for a variety of applications.



KDPL208

IMPACT DRIVER

1. Brushless outer rotor motor,delivering up to 208N.m of torque;
2.107mm ultra compact body,perfect control in narrow space.

Accessories & Package

- 20V MAX Lithium-Ion Battery 4.0Ah×2 • 4A Charger • Belt Clip×2 • Driver Bit×2
- D-STACK Stacking Box

KDKIT47(TYPE BK)

CORDLESS BRUSHLESS COMBO KIT

NEW BRUSHLESS MOTOR

20V MAX





KDJZ2060i

HAMMER DRILL

1. Brushless motor, delivering up to 60N.m of torque;
2. 152mm compact body, perfect control in narrow space;
3. 20+2 Torque setting, for a variety of applications.



KDMQ85

JIG SAW

1. Brushless motor,high-efficiency, powerful and durable;
2. 6-speed adjustment, applicable to different working conditions;
3. Tool-less blade change system, for faster blade installation and removal.

Accessories & Package

- 20V MAX Lithium-Ion Battery 4.0Ah×2 • 4A Charger • Driver Bit • Belt Clip
- Saw Blade(2pcs)(T144D, T118A) • Knitted and PVC Dots Gloves
- Tool Carrying Bag • Color Box Packing

KDKIT28(TYPE EK)

CORDLESS BRUSHLESS COMBO KIT

NEW BRUSHLESS MOTOR

20V MAX





KDJZ2060i

HAMMER DRILL

1. Brushless motor,delivering up to 60N.m of torque;
2.152mm compact body,perfect control in narrow space;
3. 20+2 Torque setting,for a variety of applications.



KDPB358

IMPACT WRENCH

1. Brushless motor,delivering to 358N.m fastening torque;
2.129mm compact body,perfect control in narrow space.

Accessories & Package

- 20V MAX Lithium-Ion Battery 4.0Ah×2 • 4A Charger • Belt Clip×2
- Sockets Assembly(S17) • Driver Bit • D-STACK Stacking Box

KDKIT49(TYPE BK)

CORDLESS BRUSHLESS COMBO KIT

NEW BRUSHLESS MOTOR

20V MAX





KDJZ2060i

HAMMER DRILL

1. Brushless motor,delivering up to 60N.m of torque;
2.152mm compact body,perfect control in narrow space;
3. 20+2 Torque setting,for a variety of applications.



KDMP6

TRIMMER

1.Brushless motor;
2.6 Speed electronic constant speed control.

Accessories & Package

- 20V MAX Lithium-Ion Battery 4.0Ah×2 • 4A Charger • Driver Bit • Belt Clip
- Wrench (3pcs) • Straight Guide • Templet Guide • Trimmer Guide Assembly
- Dust cap • Knitted and PVC Dots Gloves • Tool Carrying Bag • Color Box Packing

*Specifications may differ from country to country.

AUTOMOTIVE SOLUTIONS

1 IMPACT DRIVER



KDPL04-8 KID20V-168 KDPL208 KDPL05-8

2 RATCHET WRENCH



KDPB04-10 KDPB05-10

3 POLISHER



KDSP02-180

4 CLEANER



KDQW2058 KDVC800

5 LED WORK LIGHT



KDWL20B

6 AIR PUMP



KDQE120



7 IMPACT WRENCH



KDPB80 KDPB358 KDPB488 KDPB698

KDPB968 KDPB1218 KDPB1288 KDPB1718

*Specifications may differ from country to country.

AC TOOL

*Specifications may differ from country to country.

KPL8

IMPACT SCREWDRIVER



Rated Power Input	300W
No-load Speed	0-2200/min
Rated Impact Frequency	0-3000/min
Max. Torque	98N.m
Net Weight	1.3kg

Features

1. 300W high-quality motor;
2. Variable speed adjustment, applicable to different working conditions;
3. 1.3kg lightweight body;
4. External carbon brush, convenient for replacement.

Accessories & Package

• Double Cross Screwdrive Bit • Carbon Brush • Color Box Packing

KPB12

ELECTRIC WRENCH



Rated Power Input	300W
No-load Speed	1800/min
Rated Impact Frequency	2000/min
Capacities(Bolt Size)	M8-M12mm
Square Drive	12.7x12.7mm(1/2")
Max. Fastening Torque	188N.m
Net Weight	2.1kg

Features

1. 300W high quality motor;
2. External carbon brush, convenient for replacement;
3. 2.1kg lightweight body;
4. Efficient heat dissipation air vents, effectively extending the lifetime of products.

Accessories & Package

• Socket 18×12.5L • Socket Pin • O Ring • Carbon Brush • Color Box Packing





KPB16

ELECTRIC WRENCH



Rated Power Input	450W
No-load Speed	1800/min
Rated Impact Frequency	2000/min
Capacities(Bolt Size)	M10-M16mm
Square Drive	12.7x12.7mm(1/2")
Fastening Torque Range	240-300N.m
Net Weight	2.6kg

Features

1. 450W high quality motor;
2. External carbon brush, convenient for replacement;
3. Efficient heat dissipation air vents, effectively extending the lifetime of products;
4. High strength gear box, robust and durable.

Accessories & Package

• Socket 24×12.5L • Socket Pin • O Ring • Carbon Brush • Color Box Packing

KPB20C

ELECTRIC WRENCH



Rated Power Input	340W
No-load Speed	1700/min
Rated Impact Frequency	2000/min
Capacities(Bolt Size)	M12-M20mm
Square Drive	12.7x12.7mm(1/2")
Max. Fastening Torque	294N.m
Net Weight	3.2kg

Features

1. 340W high quality motor;
2. Rocker type reversing switch;
3. Front rubberized bumper, for increased durability and user protection;
4. Efficient heat dissipation air vents, effectively extending the lifetime of products.

Accessories & Package

• Socket 24×12.5L • Socket Pin • O Ring • Carbon Brush • Color Box Packing

KPB32

ELECTRIC WRENCH



Rated Power Input	1050W
No-load Speed	1400/min
Rated Impact Frequency	1500/min
Capacities(Bolt Size)	M22-M30mm
Square Drive	25.4x25.4mm(1")
Fastening Torque Range	400-900N.m
Net Weight	10.3kg

Features

1. 1050W powerful motor;
2. 360° rotatable D-shaped auxiliary handle, for convenient operation;
3. External carbon brush, convenient for replacement;
4. Extended output shaft, easy to operate in narrow space.

Accessories & Package

• Socket 36mm • Socket Pin • O Ring • Auxiliary Handle Assembly
• Carbon Brush • Plastic Case Packing

KPB24E

SHEAR WRENCH



Rated Power Input	1050W
No-load Speed	18/min
Max. Fastening Torque	1100N.m
Net Weight	8.0kg

Features

1. 1050W powerful motor;
2. M16, M20, M22, M24 sleeve assemblies available;
3. External carbon brush, convenient for replacement;
4. Efficient heat dissipation air vents, effectively extending the lifetime of products.

Accessories & Package

• Outer Socket Assembly M22/M24 • Inner Socket Assembly M22/M24
• Slotter Screwdriver • Carbon Brush • Iron Carrying Case

KPB22C

ELECTRIC WRENCH



Rated Power Input	620W
No-load Speed	1700/min
Rated Impact Frequency	1600/min
Capacities(Bolt Size)	M16-M22mm
Square Drive	19x19mm(3/4")
Max. Fastening Torque	588N.m
Net Weight	5.0kg

Features

1. 620W high quality motor;
2. 360° rotatable auxiliary handle;
3. External carbon brush, convenient for replacement;
4. Reversing rocker switch.

Accessories & Package

• Socket 32×19L • Socket Pin • O Ring • Auxiliary Handle Assembly
• Carbon Brush • Plastic Case Packing

KPB30

ELECTRIC WRENCH



Rated Power Input	1050W
No-load Speed	1400/min
Rated Impact Frequency	1500/min
Capacities(Bolt Size)	M24-M30mm
Square Drive	25.4x25.4mm(1")
Fastening Torque Range	400-900N.m
Net Weight	10.0kg

Features

1. 1050W powerful motor;
2. 360° rotatable D-shaped auxiliary handle, for convenient operation;
3. External carbon brush, convenient for replacement;
4. Efficient heat dissipation air vents, effectively extending the lifetime of products.

Accessories & Package

• Socket 36mm • Socket Pin • O Ring • Auxiliary Handle Assembly
• Carbon Brush • Plastic Case Packing

KJZ03-6

ELECTRIC DRILL



Rated Power Input	420W
No-load Speed	0-4200/min
Max. Drilling Capacity	
Steel	Φ6.5mm
Wood	Φ15mm
Net Weight	1.0kg

Features

1. 420W high quality motor;
2. 4200/min no-load speed, high working efficiency;
3. Variable speed, applicable to different working conditions;
4. 6.5mm (1/4") metal chuck, sturdy and durable;
5. Forward and reverse rotation;

Accessories & Package

• Chuck Wrench • Carbon Brush • Color Box Packing

KJZ06-10

ELECTRIC DRILL



Rated Power Input	380W
No-load Speed	0-1400/min
Max. Drilling Capacity	
Steel	Φ10mm
Wood	Φ15mm
Net Weight	1.9kg

Features

1. Angular structure design, easy to use in narrow space;
2. 10mm (3/8") metal chuck, sturdy and durable;
3. Auxiliary handle, gives greater control for drill;
4. Large paddle switch.

Accessories & Package

• Auxiliary Handle • Chuck Wrench • Carbon Brush • Color Box Packing

*Specifications may differ from country to country.

EXCELLENT USABILITY AND COMPACT



KDD480-10/ KDD480-10K

ELECTRIC DRILL

KDD480-10

KDD480-10K

HIGH-STRENGTH CHUCK
sturdy and durable

VARIABLE SPEED
applicable to different working conditions

RUBBERIZED HANDLE
comfortable to hold

ERGONOMICS BODY DESIGN
reducing operator fatigue

EFFICIENT HEAT DISSIPATION AIR VENTS
effectively extending the lifetime of products

KDD480-10

ELECTRIC DRILL

NEW COMING SOON



Rated Power Input	480W
No-load Speed	0-3200/min
Max. Drilling Capacity	
Steel	Φ10mm
Wood	Φ25mm
Net Weight	1.3kg

Features
1. 480W high quality motor;
2. Variable speed, applicable to different working conditions;
3. 10mm(3/8") metal chuck, easy to grip ;
4. Ergonomics body design, reducing operator fatigue.

Accessories & Package
• Chuck Wrench • Carbon Brush • Color Box Packing

KDD480-10K

ELECTRIC DRILL

NEW COMING SOON



Rated Power Input	480W
No-load Speed	0-3200/min
Max. Drilling Capacity	
Steel	Φ10mm
Wood	Φ25mm
Net Weight	1.3kg

Features
1. 480W high quality motor;
2. Variable speed, applicable to different working conditions;
3. 10mm(3/8") metal chuck, easy to grip ;
4. Ergonomics body design, reducing operator fatigue.

Accessories & Package
• Carbon Brush • Color Box Packing

KJZ07-13

ELECTRIC DRILL



Rated Power Input	710W
No-load Speed	0-900/min
Max. Drilling Capacity	
Steel	Φ13mm
Wood	Φ38mm
Net Weight	2.4kg

Features
1. Double-geared drive, high torque output;
2. Adjustable speed, Forward and reverse rotation.

Accessories & Package
• Auxiliary Handle • Chuck Wrench • Carbon Brush • Color Box Packing

KJZ04-16

ELECTRIC DRILL



Rated Power Input	1650W
No-load Speed	1100/min
Max. Chucking Capacity	16mm
Max. Drilling Capacity	
Steel	Φ16mm
Wood	Φ36mm
Net Weight	3.6kg

Features
1. 1650W high power: High load capacity;
2. Strong chucking capacity: Max. Chucking Capacity 16mm;
3. High speed design: High working efficiency;
4. Multi-function: Suitable for mixing, drilling and other application scenarios;
5. Compact body: Easy to carry and comfortable to hold.

Accessories & Package
• Auxiliary Handle • Extension Bar-Auxiliary Handle • Chuck Wrench • Carbon Brush • Color Box Packing

KZJ16

ELECTRIC IMPACT DRILL

Drill Impact Drill

Two functions
drill & impact drill

Stepless speed adjustment
applicable to different working conditions



Lock-on Button
for continuous operation

13mm metal chuck

710W Powerful motor

Accessories & Package
• Auxiliary Handle • Depth Gauge • Chuck Wrench • Carbon Brush • Color Box Packing

Rated Power Input	710W
No-load Speed	0-3000/min
Rated Impact Frequency	0-45000/min
Max. Drilling Capacity	Steel Φ13mm
	Concret Φ16mm
	Wood Φ30mm
Net Weight	2.0kg

*Specifications may differ from country to country.

KHD720-16

ELECTRIC IMPACT DRILL

NEW COMING SOON



Rated Power Input	720W
No-load Speed	0-3000/min
Rated Impact Frequency	0-45000/min
Max. Drilling Capacity	Steel Φ13mm
	Brick Wall Φ16mm
	Wood Φ30mm
Net Weight	2.0kg

Features

1. 720W powerful motor, for high overload resistance;
2. Stepless speed adjustment, applicable to different working conditions;
3. Two functions: drill & impact drill, for a variety of applications;
4. 13mm(1/2")metal chuck, sturdy and durable.

Accessories & Package

• Auxiliary Handle • Depth Gauge • Chuck Wrench • Carbon Brush • Plastic Case Packing

KZJ20

ELECTRIC IMPACT DRILL



Rated Power Input	720W
	Low Speed High Speed
No-load Speed	0-1150 0-2800/min
Rated Impact Frequency	0-23000 0-56000/min
Max. Drilling Capacity	Steel Φ13 Φ8mm
	Brick wall Φ20mm
	Wood Φ40 Φ25mm
Net Weight	2.4kg

Features

1. 720W powerful motor, high load capacity;
2. 2-speed mechanical speed control;
3. 13mm(1/2")metal chuck;
4. Adjustable speed, forward and reverse rotation;
5. Premium rubberized handle, easy to carry and comfortable to hold.

Accessories & Package

• Auxiliary Handle • Depth Gauge • Chuck Wrench • Carbon Brush
• Plastic Case Packing

KZZ03-160

DIAMOND DRILL WITH WATER SOURCE



Rated Power Input	1800W
No-load Speed	1900/min
Max. Drilling Capacity	Φ160mm
Net Weight	11.7kg

Features

1. 1800W powerful motor; 2. Aluminum gearbox, sturdy and durable;
3. Soft start, easy to locate when drilling;
4. Overload protection, protecting the machine and users when the machine gets overload;
5. External carbon brush, convenient for replacement.

Accessories & Package

• Water Pipe • Pipe Connector • Open-end Wrench • Hex Wrench
• Auxiliary Handle • Carbon Brush • Carton Packing

KZZ200S

DIAMOND DRILL WITH WATER SOURCE



Rated Power Input	3300W
No-load Speed	500/min
Max. Drilling Capacity	Φ200mm
Net Weight	22.0kg

Features

1. 3300W powerful motor; 2. Aluminum gearbox, sturdy and durable;
3. Steel guide rail, high precision and smooth operation;
4. Earth leakage protection, protecting user safety;
5. External carbon brush, convenient for replacement.

Accessories & Package

• Water Pipe • Pipe Connector • Hex Wrench(3pcs) • Carbon Brush
• Carton Packing



KZZ90

DIAMOND DRILL WITH WATER SOURCE



Rated Power Input	1350W
No-load Speed	0-3000/min
Max. Drilling Capacity	Φ90mm
Net Weight	4.4kg

Features

1. 1350W powerful motor;
2. Aluminum gearbox, sturdy and durable;
3. Variable speed adjustment, applicable to diffident working conditions;
4. Retractable shoulder support assembly, more comfortable;
5. External carbon brush, convenient for replacement.

Accessories & Package

• Water Pipe • Pipe Connector • Open-end Wrench • Auxiliary Handle • Shoulder Support Assembly • Carbon Brush • Plastic Case Packing

KZZ02-200S

DIAMOND DRILL WITH WATER SOURCE



Rated Power Input	3500W
No-load Speed	700/min
Max. Drilling Capacity	Φ200mm
Net Weight	25.0kg

Features

1. 3500W powerful motor; 2. Aluminum gearbox, sturdy and durable;
3. Steel guide rail, high precision and smooth operation;
4. Earth leakage protection, protecting user safety;
5. External carbon brush, convenient for replacement.

Accessories & Package

• Water Pipe • Pipe Connector • Open-end Wrench • Hex Wrench(3pcs)
• Carbon Brush • Carton Packing

KZZ250

DIAMOND DRILL WITH WATER SOURCE



Rated Power Input	3800W
No-load Speed	580/min
Max. Drilling Capacity	Φ250mm
Net Weight	25.0kg

Features

1. 3800W powerful motor; 2. Steel guide rail, higher precision and smoother operation;
3. Soft start,easy to locate when drilling;
4. Overload protection, protecting the machine and user when the machine gets overload;
5. Earth leakage protection, protecting user safety.

Accessories & Package

• Water Pipe • Pipe Connector • Open-end Wrench • Hex Wrench(3pcs)
• Carbon Brush • Carton Packing

KZZ02-130

DIAMOND DRILL WITH WATER SOURCE



Rated Power Input	1800W
No-load Speed	1200/min
Max. Drilling Capacity	Φ130mm
Net Weight	11.6kg

Features

1. 1800W powerful motor; 2. Aluminum gearbox, sturdy and durable;
3. Soft start, for accurate positioning; 4. Earth leakage protection, protecting user safety;
5. External carbon brush, convenient for replacement.

Accessories & Package

• Water Pipe • Pipe Connector • Open-end Wrench • Hex Wrench(2pcs)
• Carbon Brush • Carton Packing

KZZ02-160

DIAMOND DRILL WITH WATER SOURCE



Rated Power Input	1800W
No-load Speed	1900/min
Max. Drilling Capacity	Φ160mm
Net Weight	5.2kg

Features

1. 1800W powerful motor;
2. Aluminum gearbox, sturdy and durable;
3. Ergonomic rubberized grip, comfortable to hold;
4. Retractable shoulder support assembly, more comfortable;
5. External carbon brush, convenient for replacement.

Accessories & Package

• Water Pipe • Pipe Connector • Open-end Wrench • Auxiliary Handle
• Shoulder Support Assembly • Carbon Brush • Plastic Case Packing

RECOMMENDED ACCESSORIES

DIAMOND CORE BIT



High quality diamond particles
sharp and durable

Excellent welding process
more powerful

Specification	Working Length	Connection Thread	Product Code
Φ63×370	310	M22	30571100011
Φ102×350	290	M22	30571100015
Φ200×450	390	M22	30571100111
Φ63×365	310	1-1/4"	30571100126
Φ102×365	300	1-1/4"	30571100129
Φ200×455	390	1-1/4"	30571100120

*Specifications may differ from country to country.

KZZ02-250

DIAMOND DRILL WITH WATER SOURCE



Rated Power Input	3800W
No-load Speed	390/1100/min
Max. Drilling Capacity	Φ250mm
Net Weight	25.0kg

Features

1. 3800W powerful motor; 2. 2-speed mechanical speed control;
3. Steel guide rail, high precision and smooth operation;
4. Overload protection, protecting the machine and user when the machine gets overload;
5. Earth leakage protection, protecting user safety.

Accessories & Package

• Water Pipe • Pipe Connector • Open-end Wrench • Hex Wrench (3pcs)
• Carbon Brush • Carton Packing

KZZ02-250A

DIAMOND DRILL WITH WATER SOURCE



Rated Power Input	3800W
No-load Speed	390/1100/min
Max. Drilling Capacity	Φ250mm
Net Weight	25.5kg

Features

1. 3800W powerful motor; 2. 2-speed mechanical speed control;
3. Steel guide rail bracket with roller, smooth operation and easy to move;
4. Overload protection, protecting the machine and user when the machine gets overload;
5. Earth leakage protection, protecting user safety.

Accessories & Package

• Water Pipe • Pipe Connector • Open-end Wrench • Hex Wrench (3pcs)
• Carbon Brush • Carton Packing

KJC16

MAGNETIC DRILL



Rated Power Input	900W
Max. Drilling Capacity	Φ16mm
Magnetism	11500N
No-load Speed	450/min
Max. Stroke	140mm
Connector	Mt2 Shank
Net Weight	11.5kg

Features

1. 900W high quality motor; 2. Twist drilling only;
3. Dual-coil electromagnetic suction cup, providing 11500N Powerful magnetism;
4. Double dovetail groove guideway, precise guidance;
5.Extended rocker arm lift bar, easy to operate.

Accessories & Package

• Open-end Wrench • Safety Belt • Hex Wrench • Drill Chuck Wrench • Fuse
• Carbon Brush • Plastic Case Packing



KJC23

MAGNETIC DRILL



Rated Power Input	1500W
Max. Drilling Capacity	
Twist Drill Bit	Φ23mm
Core Drill Bit	Φ50mm
Magnetism	15000N
No-load Speed	390/min
Max. Stroke	220mm
Connector	Mt2 Shank
Net Weight	21.0kg

Features

1. 1500W high quality motor;
2. Twist drilling/ core drilling, dual function;
3. Dual-coil electromagnetic suction cup, providing 15000N Powerful magnetism;
4. Double dovetail groove guideway, precise guidance;
5. Extended rocker arm lift bar, easy to operate.

Accessories & Package

• Core Drill Bit (22mm) • Core Drill Adaptor Assembly • Wedge Iron • Flat Tail Morse Rod • Safety Belt
• Hex Wrench (2pcs) • Drill Chuck Wrench • Drill Chuck • Fuse • Center Pin (Short Type)
• Center Pin (Long Type) • Oiler Assembly • Carbon Brush • Plastic Case Packing

KJC02-23

MAGNETIC DRILL



Rated Power Input	1600W
Max. Drilling Capacity	
Twist Drill Bit	Φ23mm
Core Drill Bit	Φ50mm
Max.Tapping Capacity	M20(Sold Separately)
Magnetism	15000N
No-load Speed	130-260/260-520/min
Max. Stroke	220mm
Connector	Mt3 Shank
Net Weight	24.0kg

Features

1. 1600W high quality motor;
2. Twist drilling/tapping/ core drilling, all done effortlessly with one machine;
3. Mechanical speed control, 2-speed mechanical speed control;
4. Variable speed adjustment;
5. Dual-coil electromagnetic suction cup, providing 15000N Powerful magnetism.

Accessories & Package

• Core Drill Adaptor Assembly • Wedge Iron • Flat Tail Morse Rod • Safety Belt • Hex Wrench (3pcs)
• Drill Chuck Wrench • Drill Chuck • Center Pin (Short Type) • Center Pin (Long Type) • Carbon Brush
• Plastic Case Packing

KJC30

MAGNETIC DRILL (CORE DRILL)



Rated Power Input	900W
Max. Drilling Capacity	Φ30mm
Max. Drilling Depth	35mm
Magnetism	11500N
No-load Speed	450/min
Max. Stroke	140mm
Connector	Straight ShankΦ19mm
Net Weight	11.5kg

Features

1. 900W High quality motor;
2. Core drilling only;
3. Dual-coil electromagnetic suction cup, providing 11500N Powerful magnetism;
4. Double dovetail groove guideway, precise guidance;
5. Extended rocker arm lift bar, easy to operate.

Accessories & Package

• Core Drill Bit (22mm) • Safety Belt • Hex Wrench (2pcs) • Open-end Wrench • Fuse
• Center Pin (Short Type) • Oiler Assembly • Protective Cover • Carbon Brush • Plastic Case Packing

KJC02-30

MAGNETIC DRILL



Rated Power Input	900W
Max. Drilling Capacity	
Twist Drill Bit	Φ13mm
Core Drill Bit	Φ30mm
Magnetism	11500N
No-load Speed	450/min
Max. Stroke	140mm
Net Weight	12.0kg

Features

1. 900W high quality motor;
2. Twist drilling/ core drilling, dual function;
3. Dual-coil electromagnetic suction cup, providing 11500N Powerful magnetism;
4. Double dovetail groove guideway, precise guidance;
5. Extended rocker arm lift bar, easy to operate.

Accessories & Package

• Core Drill Bit (22mm) • Core Drill Adaptor Assembly • Open-end Wrench(2pcs) • Hex Wrench (2pcs)
• Drill Chuck Wrench • Drill Chuck • Adaptor • Fuse • Center Pin (Short Type) • Oiler Assembly
• Protective Cover • Carbon Brush • Plastic Case Packing

MULTI-FUNCTION AND PRACTICABILITY



KJC02-23

MAGNETIC DRILL

DUAL-COIL ELECTROMAGNETIC SUCTION CUP
providing 15000N Powerful magnetism

VARIABLE SPEED ADJUSTMENT

1 GEAR
low speed, high torque 130-260/min

2 GEAR
high speed, low torque 260-520/min

EXTENDED ROCKER ARM LIFT BAR
easy to operate

TWIST DRILLING / TAPPING / CORE DRILLING
all done effortlessly with one machine

DOUBLE DOVETAIL GROOVE GUIDEWAY
precise guidance

*Specifications may differ from country to country.

Pictures						
Models		KDZC04-24 20VMAX	KRH20V-26 20VMAX	KRH20V-28 20VMAX	KZC05-26B	KZC04-28
Specifications	Rated power Input	500W(Max.output power)	750W(Max.output power)	850W(Max.output power)	800W	820W
	No-load Speed	0-1000/min	0-1125/min	0-780/min	0-1200/min	0-1300/min
	Rated Impact Frequency	0-4500/min	0-5100/min	0-4500/min	0-4000/min	0-4200/min
	Impact Energy	2.8J	2.8J	3.6J	3.0J	3.3J
	Net Weight	3.2kg(with 4.0Ah battery)	4.3kg(with 8.0Ah battery)	4.8kg(with 8.0Ah battery)	2.93kg	2.75kg
	Tool Holder	SDS-PLUS	SDS-PLUS	SDS-PLUS	SDS-PLUS	SDS-PLUS
Drilling Diameter in concrete (mm)		Total range / Optimal: 6, 14, 24	6, 8, 18, 26	6, 8, 22, 28	Total range / Optimal: 6, 16, 26	6, 8, 18, 28
Modes	Drill Function	●	●	●	●	●
	Rotary Hammer function	●	●	●	●	●
	Demolition Function	●	●	●	●	●
Adjustable Speed		●	●	●	●	●
Drilling/Chiselling ratio		10% Drilling, 90% Chiselling	20% Drilling, 80% Chiselling	20% Drilling, 80% Chiselling	10% Drilling, 90% Chiselling	10% Drilling, 90% Chiselling
Working direction		↕	↕	↕	↕	↕
Features		Drills up to **48pcs** Φ8×80mm holes in C40 concrete on one 4.0Ah battery charge	Drills up to **87pcs** Φ10×70mm holes in C40 concrete on one 8.0Ah battery charge	Drills up to **45pcs** Φ16×70mm holes in C40 concrete on one 8.0Ah battery charge	The drilling efficiency: about **20%** higher than KZC02-20	The drilling efficiency: about **20%** higher than KZC05-26B
Heavy Duty			HEAVY DUTY	HEAVY DUTY		HEAVY DUTY
Recommended application scenarios	Home decoration	■■■	■■		■■■	■■■
	Outdoor installation	■■■	■■■	■■	■	■
	Steel drilling	■	■		■	■
	Auxiliary planting of steel bars		■	■■	■■	■■■
	Medium anchor hole drilling		■	■■■		
	Tile demolition	■	■	■■	■	■■
	Reinforcement by planting steel bars			■■		■■
	Concrete demolition			■■		

Pictures of application scenarios



Home decoration



Outdoor installation



Steel drilling



Auxiliary planting of steel bars



Medium anchor hole drilling



Tile demolition



Reinforcement by planting steel bars



Concrete demolition

The data comes from Dongcheng laboratory approved by CNAS/TUV, etc.The data is for reference only.


*Specifications may differ from country to country.

Pictures							
Models		KRH780-26	KRH960-28	KZC06-28B	KRH1200-30	KZC03-38	KZC45
Specifications	**Rated power Input**	780W	960W	1200W	1200W	1100W	1500W
	No-load Speed	700/min	1000/min	1200/min	0-930/min	320/min	0-305/min
	Rated Impact Frequency	3200/min	5000/min	5800/min	0-5300/min	2900/min	1370-2700/min
	Impact Energy	3.0J	3.2J	4.7J	3.7J	7.9J	15.0J
	Net Weight	5.0kg	5.0kg	4.7kg	4.6kg	6.2kg	8.2kg
	Tool Holder	SDS-PLUS	SDS-PLUS	SDS-PLUS	SDS-PLUS	SDS-Max	SDS-Max
		Total range / Optimal				**Total range / Optimal**	
Drilling Diameter in concrete (mm)		6 18 26	6 10 20 28	6 8 20 28	6 10 25 30	10 18 32 38	10 24 40 45
Modes	**Drill Function**	○	○	○	●	○	○
	Rotary Hammer function	●	●	●	●	●	●
	Demolition Function	●	●	●	●	●	●
Adjustable Speed		○	○	○	●	○	●
Drilling/Chiselling ratio		30% Drilling, 70% Chiselling	30% Drilling, 70% Chiselling	20% Drilling, 80% Chiselling	20% Drilling, 80% Chiselling	30% Drilling, 70% Chiselling	40% Drilling, 60% Chiselling
Working direction		↕	↕	↕	↕	↱	↱
Features		The drilling efficiency: about **10%** higher than competitors	The drilling efficiency: about **10%** higher than competitors	The drilling efficiency: about **10%** higher than competitors	The drilling efficiency: about **10%** higher than competitors	Light-weight model: **22%** lighter than KZC38	Max.drilling capacity Φ45mm
Heavy Duty				HEAVY DUTY	HEAVY DUTY	HEAVY DUTY	HEAVY DUTY
Recommended application scenarios	**Auxiliary planting of steel bars**	■					
	Fire pipeline installation	■■■	■■	■■	■■	■	
	Medium anchor hole drilling	■■■	■■■	■■■	■■	■■	■
	Waterproofing and plugging hole	■■	■■	■■	■■	■■■	■
	Tile demolition	■■	■■	■■	■		
	Reinforcement by planting steel bars		■■	■■■	■■	■■	■■
	Engineering application		■	■■	■■■	■■	■■■
	Concrete demolition	■	■■	■■	■■	■■	■■■

Pictures of application scenarios


Auxiliary planting of steel bars


Fire pipeline installation


Medium anchor hole drilling


waterproofing and plugging hole


Tile demolition


Reinforcement by planting steel bars


Elevator installation


Concrete demolition

The data comes from Dongcheng laboratory approved by CNAS/TUV, etc.The data is for reference only.

*Specifications may differ from country to country.

WORKS BETTER THAN YOU EXPECT



KZC05-26B

HAMMER DRILL



SDS PLUS



FORWARD AND REVERSE SWITCH
wider application



STEPLESS SPEED ADJUSTMENT
applicable to different working conditions

Drill Rotary hammer Demolition

3-MODE OPERATION

KRH780-26

ELECTRIC ROTARY HAMMER

NEW COMING SOON



DVR

Rated Power Input	780W
Impact Energy	3.0J
No-load Speed	700/min
Rated Impact Frequency	3200/min
Max. Drilling Capacity	Concrete Φ26mm
Net Weight	5.0kg

Features

1. 2-Mode operation, rotary hammer and demolition;
2. Safety Clutch Function, automatically stop when the drill bit gets stuck;
3. DVR: Vibration Reduction Technology, improving operation comfort.

Accessories & Package

• Grease • Dust Cap • O Ring(2pcs) • Auxiliary Handle • Depth Gauge • Special Wrench
• Carbon Brush • Plastic Case Packing



KZC05-26B

HAMMER DRILL



Rated Power Input	800W
Impact Energy	3.0J
No-load Speed	0-1200/min
Rated Impact Frequency	0-4000/min
Max. Drilling Capacity	Concrete Φ26mm
Net Weight	2.93kg

Features

1. Safety Clutch Function, automatically stop when the drill bit gets stuck;
2. 3-Mode operation, drill, rotary hammer and demolition;
3. Forward and reverse switch and Stepless variable speed control.

Accessories & Package

• Auxiliary Handle • Depth Gauge • Carbon Brush • Plastic Case Packing

KRH960-28

ELECTRIC ROTARY HAMMER

NEW COMING SOON



DVR

Rated Power Input	960W
Impact Energy	3.2J
No-load Speed	1000/min
Rated Impact Frequency	5000/min
Max. Drilling Capacity	Concrete Φ28mm
Net Weight	5.0kg

Features

1. 2-Mode operation, rotary hammer and demolition;
2. Safety Clutch Function, automatically stop when the drill bit gets stuck;
3. DVR: Vibration Reduction Technology, Improving operation comfort.

Accessories & Package

• Grease • Dust Cap • O Ring(2pcs) • Auxiliary Handle • Depth Gauge
• Plastic Case Packing

KZC04-28

HAMMER DRILL

HEAVY DUTY



Rated Power Input	820W
Impact Energy	3.3J
No-load Speed	0-1300/min
Rated Impact Frequency	0-4200/min
Max. Drilling Capacity	Concrete Φ28mm
Net Weight	2.75kg

Features

1. 3-Mode operation, drill, rotary hammer and demolition;
2. High power light hammer, powerful and efficient;
3. Mechanical rotary carbon brush holder reversing;
4. Reliable safety clutch design;
5. SDS-PLUS chuck.

Accessories & Package

• Auxiliary Handle • Depth Gauge • Carbon Brush • Plastic Case Packing

KZC06-28B

ELECTRIC ROTARY HAMMER

HEAVY DUTY



Rated Power Input	1200W
Impact Energy	4.7J
No-load Speed	1200/min
Rated Impact Frequency	5800/min
Max. Drilling Capacity	Concrete Φ28mm
Net Weight	4.7kg

Features

1. 1200W powerful motor;
2. 20000 holes test life, more durable;
3. 2-Mode operation, rotary hammer and demolition;
4. DVR: Vibration Reduction Technology, improving operation comfort;
5. Safety Clutch Function, automatically stop when the drill bit gets stuck.

Accessories & Package

• Grease • Wrench • Dust Cap • Auxiliary Handle • Depth Gauge • Carbon Brush
• Plastic Case Packing



*Specifications may differ from country to country.

ENDLESS PURSUIT OF EFFICIENCY



KZC06-28B

ELECTRIC ROTARY HAMMER

HEAVY DUTY

- 1200W POWERFUL MOTOR
- 4.7J STRONG IMPACT ENERGY
  easy to drill holes in concrete
- SAFETY CLUTCH FUNCTION
  automatically stop when the drill bit gets stuck
- DVR: VIBRATION REDUCTION TECHNOLOGY
  improving operation comfort
- Rotary hammer, Demolition
  2-MODE OPERATION

SUPERIOR QUALITY: OIL LUBRICATED AND MAINTENANCE FREE

YouTube Watch the video



KRH1200-30

ELECTRIC ROTARY HAMMER

HEAVY DUTY

- 1200W POWERFUL MOTOR
- MECHANICAL CLUTCH AND ELECTRONIC SPRAIN PROTECTION
- GEARBOX OIL LUBRICATION
  higher transmission efficiency and longer working life
- DVR: VIBRATION REDUCTION TECHNOLOGY
  improving operation comfort
- Drill, Rotary hammer, Demolition
  3-MODE OPERATION
  drill, rotary hammer and demolition
- QUICK CHANGE CHUCK

*Specifications may differ from country to country.

KRH1200-30

ELECTRIC ROTARY HAMMER

HEAVYDUTY



Rated Power Input	1200W
Impact Energy	3.7J
No-load Speed	0-930/min
Rated Impact Frequency	0-5300/min
Max. Drilling Capacity	Concrete Φ30mm
Net Weight	4.6kg

Features

1. 1200w high speed motor, making drilling efficiency higher;
2. DVR new vibration absorbing system;
3. Mechanical clutch and electronic anti-torsion, double protection for your safety ;
4. 3-Mode operation, drill, rotary hammer and demolition;
5. With quick change chuck.

Accessories & Package

• Grease • Oil Absorber Cloth • Dust Cap • O Ring(2pcs)• Auxiliary Handle • Depth Gauge • Carbon Brush • Plastic Case Packing



KZC03-38

ELECTRIC ROTARY HAMMER

HEAVYDUTY



Rated Power Input	1100W
Impact Energy	7.9J
No-load Speed	320/min
Rated Impact Frequency	2900/min
Max. Drilling Capacity	Concrete Φ38mm
Net Weight	6.2kg

Features

1.2-Mode operation, rotary hammer and demolition;
2.Safety Clutch Function, automatically stop when the drill bit gets stuck;
3.SDS-MAX.

Accessories & Package

• Auxiliary Handle • Plastic Case Packing

KZC45

ELECTRIC ROTARY HAMMER

HEAVYDUTY



Rated Power Input	1500W
Impact Energy	15.0J
No-load Speed	0-305/min
Rated Impact Frequency	1370-2700/min
Max. Drilling Capacity	Concrete Φ45mm
Net Weight	8.2kg

Features

1.DVR： Vibration Reduction Technology, Improving operation comfort;
2.2-Mode operation, Rotary hammer and demolition;
3.Safety Clutch Function, Automatically, stop when the drill bit gets stuck;
4.6 Speed adjustment, Applicable to different working conditions.

Accessories & Package

• Grease • Oil Absorber Cloth • Auxiliary Handle • Carbon Brush • Plastic Case Packing

RECOMMENDED ACCESSORIES

HAMMER DRILL BIT



Tungsten Carbide-tipped Bits

. Sharp Blade with High Hardless: Durable & Wear-Resistant;
. Optimal Heat Treatment Process: For High Tenacity and Hardness;
. U-Type Flute: Smooth Chip Removal & Powerful Drilling.

Specification	Tool Holder	Product Code
Φ 6×110	SDS-Plus	30570200004
Φ 6×160	SDS-Plus	30570200003
Φ 8×110	SDS-Plus	30570200114
Φ 8×160	SDS-Plus	30570200001
Φ 10×160	SDS-Plus	30570200002
Φ 12×160	SDS-Plus	30570200005

PERCUSSION HAMMER SERIES

Mode	Product Picture	Specifications					Cylinder Diameter (mm)	DVR	Lubrication Method	Variable Speed	Recommended Applications	Features
		Power (W)	Rated Impact Frequency (/min)	Impact Energy (J)	Net Weight (kg)	Tool Holder						
KZG6S		1050	2900	10.0	6.8	HEX17	Φ30		GREASE		DECORATION &SLOTTING	Portable Efficient Durable
KZG06-6S		1400	3900	16.8	6.8	HEX17	Φ35	●	GREASE		DECORATION &SLOTTING	Portable Efficient Durable
KZG07-6		1600	2900	22.0	7.3	HEX17	Φ40	●	GREASE		DECORATION &SLOTTING	Portable Efficient Durable
KZG07-6SM		1600	2900	22.0	7.9	SDS-MAX	Φ40	●	GREASE		DECORATION &SLOTTING	Portable Efficient Durable
KZG10		1500	900-1890	16.0	10.4	SDS-MAX	Φ40		GREASE	6-speed	DECORATION SLOTTING &DEMOLITIONG	Multiple Portable Efficient Durable
KZG02-15		1010	1400	40.7	16	HEX30	Φ45		OIL		DEMOLITION	High impact capacity
KZG03-15		1240	1400	41.8	16	HEX30	Φ45		OIL		DEMOLITION	High impact capacity
KZG04-15S		1700	1450	40.0	14	HEX30	Φ54	●	GREASE		DEMOLITION	High impact capacity
KZG16		1700	1300	45	18.8	HEX30	Φ58	●	GREASE		DEMOLITION	High impact capacity

The data comes from DongCheng Laboratory approved by CNAS/TUV,etc.The data is for reference only.

*Specifications may differ from country to country.

SURGING POWER, STRONGER PERCUSSION



KZG07-6/ KZG07-6SM

PERCUSSION HAMMER

1600W POWERFUL MOTOR

DVR: VIBRATION REDUCTION TECHNOLOGY
improving operation comfort



KZG07-6
HIGH STRENGTH SLEEVE
sturdy and durable



22J IMPACT ENERGY
easy to complete demolition



OPTIMIZE THE AIR OUTLET AND HEAT SINK
efficient heat dissipation, improving the service life



KZG07-6SM
SDS-MAX

KZG06-6S

PERCUSSION HAMMER



16.8J impact energy
easy to complete demolition

DVR: Vibration Reduction Technology
improving operation comfort



High Strength Sleeve
sturdy and durable

360° Rotatable Auxiliary handle

1400W powerful motor



Accessories & Package
• Chisel(2 pcs) • Grease • Auxiliary Handle • Special Wrench
• Carbon Brush • Plastic Case Packing

Rated Power Input	1400W
Impact Energy	16.8J
Rated Impact Frequency	3900/min
Net Weight	6.8kg

KZG6S

PERCUSSION HAMMER



Rated Power Input	1050W
Impact Energy	10.0J
Rated Impact Frequency	2900/min
Net Weight	6.8kg

Features
1.High strength sleeve, sturdy and durable;
2.High quality piston rubber ring;
3.Vibration reduction design, improving operation comfort.

Accessories & Package
• Grease • Auxiliary Handle • Special Wrench • Carbon Brush • Plastic Case Packing

KZG07-6


PERCUSSION HAMMER



Rated Power Input	1600W
Impact Energy	22J
Rated Impact Frequency	2900/min
Net Weight	7.3kg

Features
1. 40mm diameter cylinder, strong crushing capacity;
2. DVR: Vibration Reduction Technology, improving operation comfort;
3. High strength sleeve, sturdy and durable;
4. Optimize the air outlet and heat sink： Efficient heat dissipation, which improves service life.

Accessories & Package
• Chisel(2 pcs) • Grease • Auxiliary Handle • Special Wrench • Carbon Brush
• Plastic Case Packing

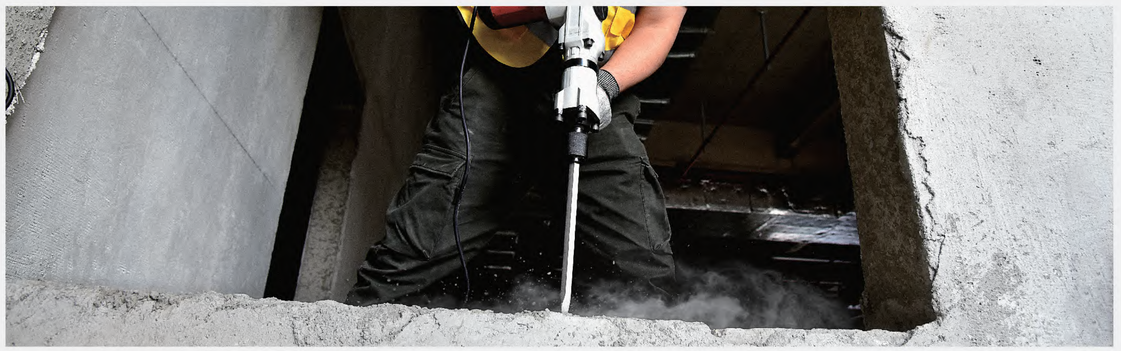

*Specifications may differ from country to country.

KZG07-6SM

PERCUSSION HAMMER

NEW



Rated Power Input	1600W
Impact Energy	22J
Rated Impact Frequency	2900/min
Net Weight	7.9kg

Features
1. 40mm diameter cylinder, strong crushing capacity;
2.DVR: Vibration Reduction Technology, improving operation comfort;
3.High strength sleeve, sturdy and durable;
4.Optimize the air outlet and heat sink： efficient heat dissipation, which improves service life;
5.SDS-MAX.

Accessories & Package
• Chisel(2 pcs) • Grease • Oil Absorber Cloth • Auxiliary Handle • Special Wrench
• Carbon Brush • Iron Carrying Case

KZG02-15

PERCUSSION HAMMER



Rated Power Input	1010W
Impact Energy	40.7J
Rated Impact Frequency	1400/min
Net Weight	16.0kg

Features
1. Double insulated;
2.Trigger switch with lock-on button, suitable for long time use;
3. Hex 30mm.

Accessories & Package
• Chisel • Oiler • Hex Wrench(2pcs) • Wrench • Carbon Brush • Iron Carrying Case

KZG03-15

PERCUSSION HAMMER



Rated Power Input	1240W
Impact Energy	41.8J
Rated Impact Frequency	1400/min
Net Weight	16.0kg

Features
1. 45mm diameter cylinder, delivering strong demolition force;
2. High strength sleeve, sturdy and durable;
3. Trigger switch with lock-on button, suitable for long time use.

Accessories & Package
• Oiler • Hex Wrench(2pcs) • Wrench • Carbon Brush • Iron Carrying Case

KZG04-15S

PERCUSSION HAMMER



Rated Power Input	1700W
Impact Energy	40J
Rated Impact Frequency	1450/min
Net Weight	15.0kg

Features
1. 1700W powerful motor;
2. 40J impact energy, easy to complete demolition;
3. High strength sleeve, sturdy and durable;
4. Trigger switch with lock-on button, suitable for long time use.

Accessories & Package
• Chisel • Grease • Auxiliary Handle • Special Wrench • Carbon Brush • Iron Carrying Case

KZG10

PERCUSSION HAMMER



Rated Power Input	1500W
Impact Energy	16.0J
Rated Impact Frequency	900-1890/min
Net Weight	10.4kg

Features
1. 1500W powerful motor;
2. 6 Speed adjustment, applicable to different working conditions;
3. Lock-on switch, for continuous chiseling;
4. High strength sleeve, sturdy and durable.

Accessories & Package
• Chisel(2 pcs) • Grease • Auxiliary Handle • Hex Wrench • Carbon Brush
• Plastic Case Packing



KZG16

PERCUSSION HAMMER




Rated Power Input	1700W
Impact Energy	45J
Rated Impact Frequency	1300/min
Net Weight	18.8kg

Features
1. 1700W powerful motor;
2. 45J impact energy, easy to complete demolition;
3. Effectively vibration control system;
4. Continuous demolition working at one-touch.

Accessories & Package
• Chisel • Grease • Auxiliary Handle • Hex Wrench • Carbon Brush • Plastic Case Packing



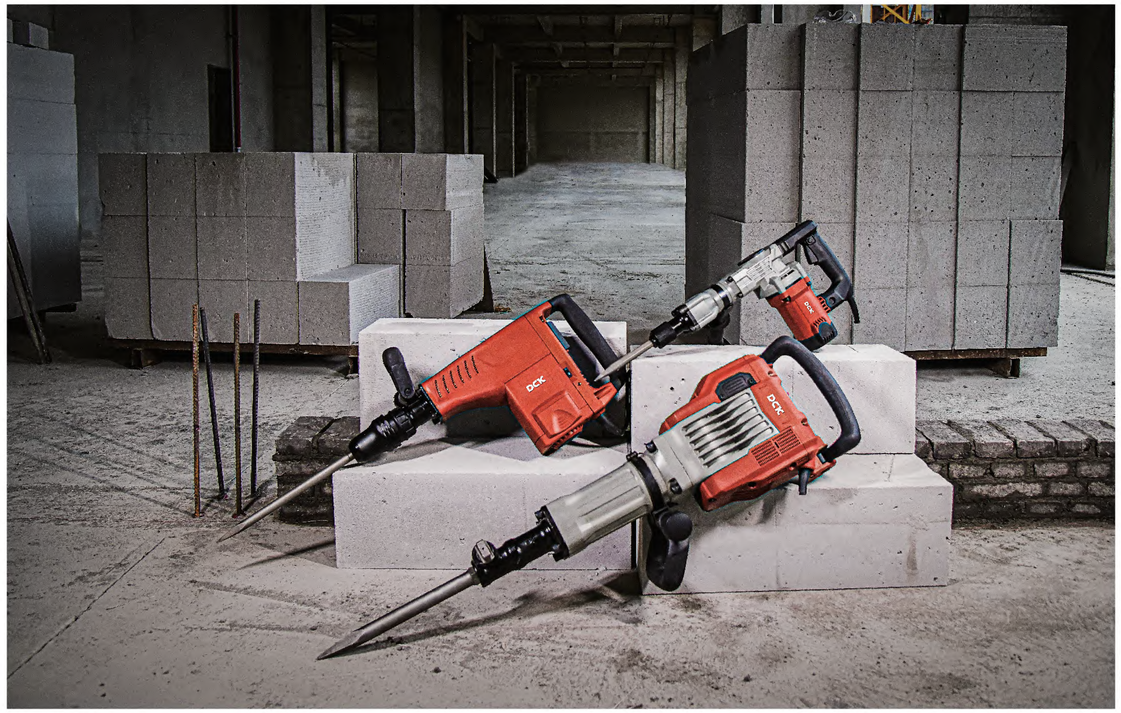

RECOMMENDED ACCESSORIES

CHISELS



Specification	Tool Holder	Model	Product Code
Φ 14×250	SDS-Plus	Point Chisel	30570300009
Φ 14×250	SDS-Plus	Flat Chisel	30570300010
Φ 17×280	Hex	Flat Chisel	30570300002
Φ 17×280	Hex	Point Chisel	30570300001
Φ 18×400	SDS-Max	Flat Chisel	30570300005
Φ 18×400	SDS-Max	Point Chisel	30570300004

*Specifications may differ from country to country.

ANGLE GRINDERS OVERVIEW

Products	Max.wheel Size	Rated Power Input(W)	Switch	Auto-stop Carbon Brush	Adjustable speed	Electronic Constant Speed	Constant Power	Slim Body	Optimal Applications	Heavy Duty	Special Features
KSM100BL	100mm	1200W	Rear toggle switch					Slim body	Metal Working		Brushless motor, soft start
KSM03-100S	100mm	950W	Slide switch					Slim body	Metal Working		Optional function: Power-off protection
KSM10-100	100mm	1020W	Slide switch		●		●		Cutting	HEAVY DUTY	Optional function: Power-off protection
KSM13-100	100mm	820W	Rear toggle switch	●				Slim body	Metal Working		
KSM13-100B	100mm	820W	Slide switch	●				Slim body	Metal Working		Optional function: Power-off protection
KSM16-100	100mm	1250W	Slide switch				●	Slim body	Cutting	HEAVY DUTY	Brushless motor, soft start
KAG1100-100	100mm	1100W	Slide switch	●				Slim body	Metal Working	HEAVY DUTY	Optional function: Power-off protection
KAG1100-100P	100mm	1100W	Paddle switch	●				Slim body	Metal Working	HEAVY DUTY	
KSM03-115	115mm	850W	Slide switch						Metal Working		Optional function: Power-off protection
KSM03-115S	115mm	950W	Slide switch					Slim body	Metal Working		Optional function: Power-off protection
KSM07-115	115mm	1020W	Slide switch		●		●		Cutting	HEAVY DUTY	Optional function: Power-off protection
KSM13-115B	115mm	820W	Slide switch	●				Slim body	Metal Working		Optional function: Power-off protection
KSM16-115	115mm	1250W	Slide switch				●	Slim body	Cutting	HEAVY DUTY	Brushless motor, soft start
KAG1100-115	115mm	1100W	Slide switch	●				Slim body	Metal Working	HEAVY DUTY	Optional function: Power-off protection
KAG1100-115P	115mm	1100W	Paddle switch	●				Slim body	Metal Working	HEAVY DUTY	
KSM125BL	125mm	1250W	Slide switch					Slim body	Metal Working	HEAVY DUTY	Brushless motor, soft start
KSM02-125B	125mm	1200W	Trigger switch						Metal Working		
KSM03-125S	125mm	950W	Slide switch					Slim body	Metal Working		Optional function: Power-off protection
KSM05-125	125mm	1500W	Trigger switch	●		●			Metal Working	HEAVY DUTY	Optional function: soft start
KSM16-125	125mm	1250W	Slide switch				●	Slim body	Cutting	HEAVY DUTY	Brushless motor, soft start
KAG1100-125	125mm	1100W	Slide switch	●				Slim body	Metal Working	HEAVY DUTY	Optional function: Power-off protection
KAG1100-125P	125mm	1100W	Paddle switch	●				Slim body	Metal Working	HEAVY DUTY	
KAG1500-125	125mm	1500W	Trigger switch	●					Metal Working		
KAG1500-150	150mm	1500W	Trigger switch	●					Metal Working		
KSM04-150S	150mm	2000W	Trigger switch	●					Cutting	HEAVY DUTY	
KSM05-150	150mm	1500W	Trigger switch	●		●			Metal Working	HEAVY DUTY	Optional function: Power-off protection, soft start
KSM180BL	180mm	2600W	Trigger switch						Metal Working	HEAVY DUTY	Soft start、Brushless motor
KSM03-180	180mm	2200W	Trigger switch						Metal Working		Optional function: soft start
KSM05-180S	180mm	Rated Current Input : 13 A	Trigger switch	●					Stone Working	HEAVY DUTY	Optional function: soft start
KSM230SH	230mm	2600W	Trigger switch	●					Stone Working		Optional function: soft start
KSM03-230	230mm	2200W	Trigger switch						Metal Working		Optional function: soft start
KSM05-230S	230mm	Rated Current Input : 13 A	Trigger switch	●					Stone Working	HEAVY DUTY	Optional function: soft start

*Specifications may differ from country to country.

BUILT FOR TOUGH JOBS





KSM03-100S/ KSM03-115S/ KSM03-125S

ANGLE GRINDER

Ø59 mm

950W POWERFUL MOTOR
efficient and high overload resistance

HIGH STRENGTH GEARS
for long service life

SPINDLE LOCK
Increased convenience for accessories replacement

LABYRINTH DUSTPROOF STRUCTURE
effectively extending the lifetime of products

2-MOTION SLIDE SWITCH
convenient and safe to operate

186mm ULTRA SLIM BODY
comfortable to hold and easy to control

ULTRA-COMPACT AND POWERFUL



NEW



KAG1100-100/ KAG1100-115/ KAG1100-125

ANGLE GRINDER

Ø58 mm

HEAVY DUTY

1100W ENERGY-GATHERING MOTOR
efficient and high overload resistance

AUTO STOP

AUTO STOP CARBON BRUSH
effectively extending the lifetime of motor

186mm ULTRA SLIM BODY
comfortable to hold and easy to control

LABYRINTH DUSTPROOF STRUCTURE
effectively extending the lifetime of products

HIGH STRENGTH GEARS
for long service life

*Specifications may differ from country to country.

KSM100BL (4")

BRUSHLESS ANGLE GRINDER

NEW BRUSHLESS MOTOR

Ø51.9 mm



1200W high power brushless motor
for high overload resistance

163mm ultra slim body
comfortable to hold and easy to control



Rear toggle switch
effective dust prevention



Dust separation structure design
effectively extending the lifetime of products



Labyrinth dustproof structure
effectively extending the lifetime of products

Quadruple automatic safety protection

- Over-temperature protection
- Over-current protection
- Power-off protection
- Soft start



Accessories & Package
• Wrench • Wheel Guard • Color Box Packing

Rated Power Input	1200W
Rated Speed	10000/min
Max.Wheel Dia.	Φ100mm
Spindle Thread	M10
Net Weight	1.6kg

KSM16-100 (4")

BRUSHLESS ANGLE GRINDER

BRUSHLESS MOTOR

HEAVY DUTY



Rated Power Input	1250W
Rated Speed	10000/min
Max.Wheel Dia.	Φ100mm
Spindle Thread	M10
Net Weight	1.7kg

Features
1. 1250W High Power brushless motor, efficient and high overload resistance;
2. Quadruple Auto Security Protection, over-temperature protection, Over-current protection, Power-off protection, Soft start ;
3. 186mm ultra slim body, comfortable to hold and easy to control;
4. Labyrinth dustproof structure, effectively extending the lifetime of products.

Accessories & Package
• Auxiliary Handle • Wrench • Wheel Guard • Color Box Packing

KAG1100-100 (4")

ANGLE GRINDER

NEW HEAVY DUTY



Rated Power Input	1100W
Rated Speed	13000/min
Max.Wheel Dia.	Φ100mm
Spindle Thread	M10
Net Weight	1.9kg

Optional function: Power-off protection

Features
1. 1100W energy-gathering motor, efficient and high overload resistance;
2. Labyrinth dustproof structure, effectively extending the lifetime of products;
3. Auto stop carbon brush, effectively extending the lifetime of motor;
4. High strength gears, for long service life.

Accessories & Package
• Auxiliary Handle • Wrench • Carbon Brush • Wheel Guard • Color Box Packing

KAG1100-100P (4")

ANGLE GRINDER

NEW HEAVY DUTY



Rated Power Input	1100W
Rated Speed	13000/min
Max.Wheel Dia.	Φ100mm
Spindle Thread	M10
Net Weight	1.9kg

Features
1. 1100W energy-gathering motor, efficient and high overload resistance;
2. Labyrinth dustproof structure, effectively extending the lifetime of products;
3. Auto stop carbon brush, effectively extending the lifetime of motor;
4. Large paddle switch, effectively protecting the safety of the operators.

Accessories & Package
• Auxiliary Handle • Wrench • Carbon Brush • Wheel Guard • Color Box Packing

KSM03-115 (4-1/2")

ANGLE GRINDER



Rated Power Input	850W
No-load Speed	11800/min
Max.Wheel Dia.	Φ115mm
Spindle Thread	M14
Net Weight	1.8kg

Optional function: Power-off protection

Features
1. 850W high quality motor;
2. Labyrinth dustproof structure, effectively extending the lifetime of products;
3. High strength gears, for long service life.

Accessories & Package
• Wheel Guard • Auxiliary Handle • Wrench • Carbon Brush • Color Box Packing

KSM03-100S (4")

ANGLE GRINDER



Rated Power Input	950W
Rated Speed	13000/min
Max.Wheel Dia.	Φ100mm
Spindle Thread	M10
Net Weight	1.8kg

Optional function: Power-off protection

Features
1. 950W powerful motor, efficient and high overload resistance;
2. 186mm ultra slim body, comfortable to hold and easy to control ;
3. Labyrinth dustproof structure, effectively extending the lifetime of products;
4. High strength gears, for long service life.

Accessories & Package
• Auxiliary Handle • Wrench • Wheel Guard • Carbon Brush • Color Box Packing

KSM10-100 (4")

ANGLE GRINDER



Rated Power Input	1020W
Rated Speed	4200-13000/min
Max.Wheel Dia.	Φ100mm
Spindle Thread	M10
Net Weight	2.1kg

Optional function: Power-off protection

Features
1. 1020W powerful motor;
2. 6-speed adjustment, applicable to different working conditions;
3. Constant output power, maintaining constant power under load;
4. High strength gears, for long service life.

Accessories & Package
• Auxiliary Handle • Wrench • Wheel Guard • Carbon Brush • Color Box Packing

KSM03-115S (4-1/2")

ANGLE GRINDER



Rated Power Input	950W
Rated Speed	11800/min
Max.Wheel Dia.	Φ115mm
Spindle Thread	M14
Net Weight	1.9kg

Optional function: Power-off protection

Features
1. 950W powerful motor, efficient and high overload resistance;
2. 186mm ultra slim body, comfortable to hold and easy to control;
3. Labyrinth dustproof structure, effectively extending the lifetime of products;
4. High strength gears, for long service life.

Accessories & Package
• Auxiliary Handle • Wrench • Wheel Guard • Color Box Packing

KSM07-115 (4-1/2")

ANGLE GRINDER



Rated Power Input	1020W
Rated Speed	4200-11800/min
Max.Wheel Dia.	Φ115mm
Spindle Thread	M14
Net Weight	2.1kg

Optional function: Power-off protection

Features
1. 1020W powerful motor;
2. 6-speed adjustment, applicable to different working conditions;
3. Constant output power, maintaining constant power under load;
4. High strength gears, for long service life.

Accessories & Package
• Auxiliary Handle • Wrench • Wheel Guard • Carbon Brush • Carton Packing

KSM13-100 (4")

ANGLE GRINDER



Rated Power Input	820W
Rated Speed	13000/min
Max.Wheel Dia.	Φ100mm
Spindle Thread	M10
Net Weight	1.5kg

Features
1. 820W powerful motor, efficient and high overload resistance;
2. 180mm ultra slim body, comfortable to hold and easy to control;
3. Labyrinth dustproof structure, effectively extending the lifetime of products;
4. High strength gears, for long service life.

Accessories & Package
Wrench • Wheel Guard • Carbon Brush • Color Box Packing

KSM13-100B (4")

ANGLE GRINDER



Rated Power Input	820W
Rated Speed	13000/min
Max.Wheel Dia.	Φ100mm
Spindle Thread	M10
Net Weight	1.5kg

Optional function: Power-off protection

Features
1. 820W powerful motor, efficient and high overload resistance;
2. 180mm ultra slim body, comfortable to hold and easy to control;
3. Labyrinth dustproof structure, effectively extending the lifetime of products;
4. High strength gears, for long service life.

Accessories & Package
• Auxiliary Handle • Wrench • Wheel Guard • Carbon Brush • Color Box Packing

KSM13-115B (4-1/2")

ANGLE GRINDER



Rated Power Input	820W
Rated Speed	11800/min
Max.Wheel Dia.	Φ115mm
Spindle Thread	M14
Net Weight	1.5kg

Optional function: Power-off protection

Features
1. 820W powerful motor, efficient and high overload resistance;
2. 180mm ultra slim body, comfortable to hold and easy to control;
3. Labyrinth dustproof structure, effectively extending the lifetime of products;
4. High strength gears, for long service life.

Accessories & Package
• Auxiliary Handle • Wrench • Wheel Guard • Carbon Brush • Color Box Packing

KSM16-115 (4-1/2")

BRUSHLESS ANGLE GRINDER

BRUSHLESS MOTOR

HEAVY DUTY



Rated Power Input	1250W
Rated Speed	10000/min
Max.Wheel Dia.	Φ115mm
Spindle Thread	M14
Net Weight	1.8kg

Features
1. 1250W High Power brushless motor, efficient and high overload resistance;
2. Quadruple Auto Security Protection, over-temperature protection, Over-current protection, Power-off protection, Soft start ;
3. 186mm ultra slim body, comfortable to hold and easy to control;
4. Labyrinth dustproof structure, effectively extending the lifetime of products.

Accessories & Package
• Auxiliary Handle • Wrench • Wheel Guard • Color Box Packing

*Specifications may differ from country to country.

KAG1100-115 (4-1/2")

ANGLE GRINDER

NEW HEAVY DUTY



Rated Power Input	1100W
Rated Speed	11800/min
Max.Wheel Dia.	Φ115mm
Spindle Thread	M14
Net Weight	2.0kg

Optional function: Power-off protection

Features
1. 1100W energy-gathering motor, efficient and high overload resistance;
2. Labyrinth dustproof structure, effectively extending the lifetime of products;
3. Auto stop carbon brush, effectively extending the lifetime of motor;
4. High strength gears, for long service life.

Accessories & Package
• Auxiliary Handle • Wrench • Carbon Brush • Wheel Guard • Color Box Packing

KAG1100-115P (4-1/2")

ANGLE GRINDER

NEW HEAVY DUTY



Rated Power Input	1100W
Rated Speed	11800/min
Max.Wheel Dia.	Φ115mm
Spindle Thread	M14
Net Weight	2.0kg

Features
1. 1100W energy-gathering motor, efficient and high overload resistance;
2. Labyrinth dustproof structure, effectively extending the lifetime of products;
3. Auto stop carbon brush, effectively extending the lifetime of motor;
4. Large paddle switch, effectively protecting the safety of the operators.

Accessories & Package
• Auxiliary Handle • Wrench • Carbon Brush • Wheel Guard • Color Box Packing

KSM125BL (5")

BRUSHLESS ANGLE GRINDER

NEW COMING SOON



Rated Power Input	1250W
Rated Speed	11800/min
Max.Wheel Dia.	Φ125mm
Spindle Thread	M14
Net Weight	1.7kg

Features
1. 1250W High Power brushless motor, efficient and high overload resistance;
2. Quadruple Auto Security Protection, Over-temperature protection, Over-current protection, Power-off protection, Soft start ;
3. Dust separation structure design, effectively extending the lifetime of products.

Accessories & Package
• Auxiliary Handle • Wrench • Carbon Brush • Wheel Guard • Color Box Packing

KSM02-125B (5")

ANGLE GRINDER



Rated Power Input	1200W
Rated Speed	11800/min
Max.Wheel Dia.	Φ125mm
Spindle Thread	M14
Net Weight	3.0kg

Features
1. 1200W high quality motor;
2. Labyrinth dustproof structure, effectively extending the lifetime of products;
3. High strength gears, for long service life;
4. External carbon brush, convenient for replacement.

Accessories & Package
• Auxiliary Handle • Wrench • Carbon Brush • Wheel Guard • Color Box Packing

KAG1100-125P (5")

ANGLE GRINDER

NEW HEAVY DUTY



Rated Power Input	1100W
Rated Speed	11800/min
Max.Wheel Dia.	Φ125mm
Spindle Thread	M14
Net Weight	2.0kg

Features
1. 1100W energy-gathering motor, efficient and high overload resistance;
2. Labyrinth dustproof structure, effectively extending the lifetime of products;
3. Auto stop carbon brush, effectively extending the lifetime of motor;
4. Large paddle switch, effectively protecting the safety of the operators.

Accessories & Package
• Auxiliary Handle • Wrench • Carbon Brush • Wheel Guard • Color Box Packing

KAG1500-150 (6")

ANGLE GRINDER

NEW



Rated Power Input	1500W
Rated Speed	10000/min
Max.Wheel Dia.	Φ150mm
Spindle Thread	M14
Net Weight	3.3kg

Features
1. 1500W high quality motor, efficient and high overload resistance;
2. Four-finger trigger switch with lock-on button,comfortable to grip and suitable for long-time use;
3. Labyrinth dustproof structure, effectively extending the lifetime of products;
4. Quick-replace carbon brush, convenient for replacement.

Accessories & Package
• Auxiliary Handle • Wrench • Carbon Brush • Wheel Guard • Color Box Packing

KAG1500-125 (5")

ANGLE GRINDER

NEW



Rated Power Input	1500W
Rated Speed	11800/min
Max.Wheel Dia.	Φ125mm
Spindle Thread	M14
Net Weight	3.0kg

Features
1. 1500W high quality motor, efficient and high overload resistance;
2. Four-finger trigger switch with lock-on button,comfortable to grip and suitable for long-time use;
3. Labyrinth dustproof structure, effectively extending the lifetime of products;
4. Quick-replace carbon brush, convenient for replacement.

Accessories & Package
• Auxiliary Handle • Wrench • Carbon Brush • Wheel Guard • Color Box Packing

KSM04-150S (6")

ANGLE GRINDER

HEAVY DUTY



Rated Power Input	2000W
Rated Speed	10000/min
Max.Wheel Dia.	Φ150mm
Spindle Thread	M14
Net Weight	3.6kg

Features
1. 2000W powerful motor, overload resistance 50% higher than KSM04-150;
2. Auto stop carbon brush, effectively extending the lifetime of motor;
3. Four-finger trigger switch with lock-on button, comfortable to grip and suitable for long time use;
4. Labyrinth dustproof structure, effectively extending the lifetime of products.

Accessories & Package
• Auxiliary Handle • Wrench • Carbon Brush • Wheel Guard • Color Box Packing

KSM03-125S (5")

ANGLE GRINDER



Rated Power Input	950W
Rated Speed	11800/min
Max.Wheel Dia.	Φ125mm
Spindle Thread	M14
Net Weight	1.9kg

Optional function: Power-off protection

Features
1.950W powerful motor, efficient and high overload resistance;
2.186mm ultra slim body, comfortable to hold and easy to control;
3.Labyrinth dustproof structure, effectively extending the lifetime of products;
4.High strength gears, for long service life.

Accessories & Package
• Auxiliary Handle • Wrench • Wheel Guard • Color Box Packing

KSM05-125 (5")

ANGLE GRINDER

HEAVY DUTY



Rated Power Input	1500W
Rated Speed	11800/min
Max.Wheel Dia.	Φ125mm
Spindle Thread	M14
Net Weight	2.3kg

Features
1. 1500W high quality motor;
2. Labyrinth dustproof structure, effectively extending the lifetime of products;
3. High strength gears, for long service life;
4. External carbon brush, convenient for replacement.

Accessories & Package
• Auxiliary Handle • Wrench • Carbon Brush • Wheel Guard • Color Box Packing

KSM05-150 (6")

ANGLE GRINDER

HEAVY DUTY



Rated Power Input	1500W
Rated Speed	9000/min
Max.Wheel Dia.	Φ150mm
Spindle Thread	M14
Net Weight	2.4kg

Optional function: Power-off protection

Features
1. 1500W high quality motor;
2. Labyrinth dustproof structure, effectively extending the lifetime of products;
3. High strength gears, for long service life;
4. External carbon brush, convenient for replacement.

Accessories & Package
• Auxiliary Handle • Wrench • Carbon Brush • Wheel Guard • Color Box Packing

KSM180BL (7")

BRUSHLESS ANGLE GRINDER

BRUSHLESS MOTOR



Rated Power Input	2600W
Rated Speed	8500/min
Max.Wheel Dia.	Φ180mm
Spindle Thread	M14
Net Weight	5.8kg

Features
1. 2600W Powerful Brushless Motor, material removal rate is 60% higher than brushed motor;
2. LED Tool Status indicator, monitoring tool status in real time;
3. Four-finger trigger switch with lock-on button, comfortable to grip and suitable for long time use;
4. External carbon brush, convenient replacement.

Accessories & Package
• Auxiliary Handle • Wrench • Wheel Guard • Color Box Packing

KSM16-125 (5")

BRUSHLESS ANGLE GRINDER

BRUSHLESS MOTOR HEAVY DUTY



Rated Power Input	1250W
Rated Speed	10000/min
Max.Wheel Dia.	Φ125mm
Spindle Thread	M14
Net Weight	1.8kg

Features
1. 1250W High Power brushless motor, efficient and high overload resistance;
2. Quadruple Auto Security Protection, over-temperature protection, Over-current protection, Power-off protection, Soft start ;
3. 186mm ultra slim body, comfortable to hold and easy to control;
4. Labyrinth dustproof structure, effectively extending the lifetime of products.

Accessories & Package
• Auxiliary Handle • Wrench • Wheel Guard • Color Box Packing

KAG1100-125 (5")

ANGLE GRINDER

NEW HEAVY DUTY



Rated Power Input	1100W
Rated Speed	11800/min
Max.Wheel Dia.	Φ125mm
Spindle Thread	M14
Net Weight	2.0kg

Optional function: Power-off protection

Features
1. 1100W energy-gathering motor, efficient and high overload resistance;
2. Labyrinth dustproof structure, effectively extending the lifetime of products;
3. Auto stop carbon brush, effectively extending the lifetime of motor;
4. High strength gears, for long service life.

Accessories & Package
• Auxiliary Handle • Wrench • Carbon Brush • Wheel Guard • Color Box Packing

KSM03-180 (7")

ANGLE GRINDER



Rated Current Input	2200W
Rated Speed	8300/min
Max.Wheel Dia.	Φ180mm
Spindle Thread	M14
Net Weight	5.0kg

Features
1. 2200W powerful motor, suitable for heavy-duty working conditions;
2. Rotatable rear handle, position to suit most cutting and grinding operations;
3. Four-finger trigger switch with lock-on button, comfortable to grip and suitable for long time use;
4. External carbon brush, convenient for replacement.

Accessories & Package
• Auxiliary Handle • Wheel Guard • Wrench • Carbon Brush • Color Box Packing

KSM05-180S (7")

ANGLE GRINDER

HEAVY DUTY



Rated Current Input	13A
Rated Speed	8400/min
Max.Wheel Dia.	Φ180mm
Spindle Thread	M14
Net Weight	5.3kg

Optional Function: Soft Start

Features
1. 3000W powerful motor, suitable for heavy-duty working conditions;
2. Dual vibration control system, reducing arm fatiue;
3. Four-finger trigger switch with lock-on button, comfortable to grip and suitable for long time use;
4. External carbon brush, convenient for replacement.

Accessories & Package
• Auxiliary Handle • Wrench • Carbon Brush • Wheel Guard • Color Box Packing

*Specifications may differ from country to country.

BORN FOR HEAVY DUTY



YouTube Watch the video


KSM05-180S/ KSM05-230S

ANGLE GRINDER

HEAVY DUTY



LOAD ENDURANCE

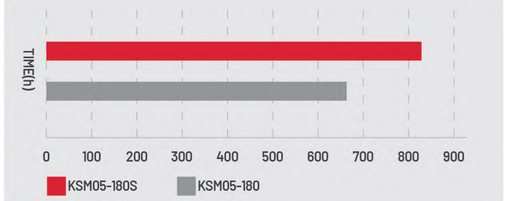

OVERLOAD RESISTANCE (3500W)





DUAL VIBRATION CONTROL SYSTEM
reducing arm fatigue

HEAVY DUTY
3000W POWERFUL MOTOR
suitable for heavy-duty working conditions



AUTO STOP CARBON BRUSH
effectively extending the lifetime of motors

KSM230SH (9")

ANGLE GRINDER



Rated Power Input	2600W
No-load Speed	6600/min
Max.Wheel Dia.	Φ230mm
Spindle Thread	M14
Net Weight	5.8kg

Optional Function: Soft Start

Features
1. 2600W powerful motor, efficient and high overload resistance;
2. Four-finger trigger switch with lock-on button, comfortable to grip and suitable for long time use;
3. Auto stop carbon brush, effectively extending the lifetime of motor.

Accessories & Package
• Wheel Guard • Auxiliary Handle • Wrench • Carbon Brush • Color Box Packing

KSM03-230 (9")

ANGLE GRINDER



Rated Power Input	2200W
No-load Speed	6600/min
Max.Wheel Dia.	Φ230mm
Spindle Thread	M14
Net Weight	5.0kg

Optional Function: Soft Start

Features
1. 2200W powerful motor, suitable for heavy-duty working conditions;
2. Rotatable rear handle, position to suit most cutting and grinding operations;
3. Four-finger trigger switch with lock-on button, comfortable to grip and suitable for long time use;
4. External carbon brush, convenient for replacement.

Accessories & Package
• Wheel Guard • Auxiliary Handle • Wrench • Carbon Brush • Color Box Packing

KSM05-230S (9")

ANGLE GRINDER

HEAVY DUTY



Rated Current Input	13A
Rated Speed	6600/min
Max.Wheel Dia.	Φ230mm
Spindle Thread	M14
Net Weight	5.4kg

Optional Function: Soft Start

Features
1. 3000W powerful motor, suitable for heavy-duty working conditions;
2. Dual vibration control system, reducing arm fatiue;
3. Four-finger trigger switch with lock-on button, comfortable to grip and suitable for long time use;
4. External carbon brush, convenient for replacement.

Accessories & Package
• Auxiliary Handle • Wrench • Carbon Brush • Wheel Guard • Color Box Packing



YouTube Watch the video

RECOMMENDED ACCESSORIES

CUT OFF WHEEL & GRINDING WHEEL



Specification	Material	Colour	Net	Product Code
105×1.2×16	A46T-BF	Black	Double	30572100008
105×1.2×16	A46T-BF	Green	Double	30572100009
107×1.0×16	A46T-BF	Green	Double	30572100014



Specification	Material	Packing (pcs)	Product Code
100×6×16	A24T-BF	200	30570500017
115×6×22.23	A24T-BF	150	30570500015
125×6×22.23	A24T-BF	150	30570500016

*Specifications may differ from country to country.

KSP02-180S

POLISHER



Rated Power Input	950W
No-load Speed	600-2100/min
Wheel Size	Φ180mm
Spindle Thread	M14
Net Weight	2.3kg



Features

1. 950W powerful motor, efficient and high overload resistance;
2. 6- speed adjustment, meeting different working requirements;
3. Motor-Over-Pad Design, for great Balance and Control;
4. Electronic constant speed, for uniform polishing .

Accessories & Package

• Wool Bonnet • Wrench • Auxiliary Handle • Color Box Packing

KSP06-180

POLISHER

Electronic constant speed
for uniform polishing

6- speed adjustment
(600/1000/1500/2000/2500/3000/min)
meeting different working requirements

Power-off protection
effectively protecting the surface of workpieces



2.4kg lightweight body
30% lighter than conventional polisher

Four-finger trigger switch with lock-on button



Accessories & Package

• Polishing Sponge • Hex Wrench • Auxiliary Handle • Socket Head Cap Screw • Carbon Brush • Color Box Packing

Rated Power Input	1400W
No-load Speed	600-3000/min
Wheel Size	Φ180mm
Spindle Thread	M14
Net Weight	2.4kg

KSJ04-10

DIE GRINDER



Rated Power Input	120W
No-load Speed	35000/min
Max. Grinding Wheel Dia.	Φ10mm
Max. Collet Size	3mm
Net Weight	0.56kg

Features

1. Short neck design, for increased maneuverability;
2. Metal hanging hook, for increased convenience;
3. External carbon brush, convenient for replacement.

Accessories & Package

• Special Wrench • Collet Chuck • Carbon Brush • Color Box Packing

KSJ04-25E

DIE GRINDER



Rated Power Input	260W
No-load Speed	13000-26700/min
Max. Grinding Wheel Dia.	Φ25mm
Max. Collet Size	6mm
Net Weight	1.1kg

Features

1. Aluminum spindle housing, sturdy and durable;
2. 6-speed adjustment, applicable to different working conditions;
3. Short neck design, for increased maneuverability;
4. Efficient heat dissipation air vents, effectively extending the lifetime of machine.

Accessories & Package

• Chuck Wrench • Carbon Brush • Color Box Packing



KSJ08-25/ KSJ08-25L

DIE GRINDER

710W POWERFUL MOTOR
efficient and high overload resistance



ANTI-SLIP SLIM BARREL
comfortable to hold



ANTI-SLIP SLIM BARREL
comfortable to hold

AUTO STOP

AUTO STOP CARBON BRUSH
effectively extend the lifetime of motors



08-25L
EXTENDED OUTPUT SHAFT
suitable for grinding in tight space



DETACHABLE DUSTPROOF FILTER
convenient for cleaning

*Specifications may differ from country to country.

KSJ08-25

DIE GRINDER



Rated Power Input	710W
No-load Speed	33000/min
Max. Grinding Wheel Dia.	Φ25mm
Max. Collet Size	6mm
Net Weight	1.7kg

Features
1. High strength metal chuck, robust and durable;
2. Efficient heat dissipation air vents, effectively extending the lifetime of machine;
3. Detachable dustproof filter, effective extension of the machine's life;
4. Rear toggle switch, effectively preventing dust and accidental touch.

Accessories & Package
• Large Wrench • Collet Chuck×2 • Carbon Brush • Color Box Packing

KSJ08-25L

DIE GRINDER



Rated Power Input	710W
No-load Speed	33000/min
Max. Grinding Wheel Dia.	Φ25mm
Max. Collet Size	6mm
Net Weight	2.0kg

Features
1. High strength metal chuck, robust and durable;
2. Efficient heat dissipation air vents, effectively extending the lifetime of machine;
3. Detachable dustproof filter, effective extension of the machine's life;
4. 2-motion slide switch, convenient and safe to operate.

Accessories & Package
• Large Wrench • Collet Chuck×2 • Carbon Brush • Color Box Packing

KSA02-125

RANDOM ORBIT SANDER

15%

380W powerful motor
sanding efficiency increased by 15%

6-speed adjustment
meeting different working conditions



139mm low-profile body
delivering optimal tool maneuverability

Rubberized body
comfortable to hold

External vacuum cleaner connector
inner diameter：Φ32mm

2.7mm

2.7mm large random orbit action
for high removal rate



Accessories & Package
• Dust Bag • Color Box Packing

Rated Power Input	380W
No-load Speed	8000-12800/min
Pad Size	Φ125mm
Net Weight	1.5kg

KSB04-100S

ORBITAL SANDER



Rated Power Input	240W
Orbits Frequency	14000/min
Pad Size	100×110mm
Net Weight	1.2kg

Features
1. Low vibration design, reducing arm fatigue;
2. Large clamping lever, for quick and easy paper installation.

Accessories & Package
• Color Box Packing

KSB03-234

ORBITAL SANDER



Rated Power Input	420W
Orbits Frequency	11500/min
Pad Size	114×234mm
Net Weight	2.9kg

Features
1. 420W powerful motor, efficient and high overload resistance;
2. Self-vacuum Function, effectively purifying the operating environment;
3. Large clamping lever, for quick and easy paper installation.

Accessories & Package
• Dust Bag • Perforated Plate • Color Box Packing

KSB03-185

ORBITAL SANDER

Efficient heat dissipation air vents
effectively extending the lifetime of products

Trigger switch with lock-on button
suitable for long-time use



Large clamping lever
for quick and easy paper installation

Low vibration design
reducing arm fatigue



Accessories & Package
• Color Box Packing

Rated Power Input	320W
Orbits Frequency	14000/min
Pad Size	93×185mm
Net Weight	1.7kg

KSA125

RANDOM ORBIT SANDER



Rated Power Input	300W
No-load Speed	4000-12000/min
Pad Size	Φ125mm
Net Weight	1.4kg

Features
1. 6-speed adjustment, meeting different working conditions;
2. 3mm large random orbit action, for high removal rate;
3. Efficient Through-the-pad Dust Collection System, for a cleaner work environment.

Accessories & Package
• Dust Bag • Carbon Brush • Color Box Packing

KSB02-100

ORBITAL SANDER



Rated Power Input	200W
Orbits Frequency	14000/min
Pad Size	100×110mm
Net Weight	1.3kg

Features
1. Large clamping lever, for quick and easy paper installation;
2. Dust-proof rocker switch;
3. Self-vacuum Function, effectively purifying the operating environment.

Accessories & Package
• Dust Bag • Carbon Brush • Color Box Packing

KST610

BELT SANDER



Rated Power Input	1200W
Belt Speed	500m/min
Wheel Size	100×610mm
Net Weight	5.8kg

Features
1. 1200W Powerful motor, efficient and high overload resistance;
2. Belt adjustment knob, preventing the sand belt from wearing the bracket;
3. Self-vacuum Function, effectively purifying the operating environment.

Accessories & Package
• Abrasive Belt (AP80) • Dust Bag Assembly • Carbon Brush
• Color Box Packing

KSF02-180

DRYWALL SANDER



Rated Power Iuput	750W
No-load Speed	1500-2700/min
Grinding Disc Dia.	Φ180mm
Net Weight	2.3kg

Features
1. Self-vacuum Function, effectively purifying the operating environment;
2. LED Light Strip Design, 360° dead-zone free;
3. Adjustment speed, meeting different working conditions;
4. Efficient heat dissipation air vents, effectively extending the lifetime of products.

Accessories & Package
• Auxiliary Handle • Dust Cleaning Hose Assembly • Dust Bag • Cannulate Sockolet • Abrasive Paper Assembly • Carbon Brush • Color Box Packing

*Specifications may differ from country to country.

KMY02-185SH

ELECTRIC CIRCULAR SAW



Rear dust exhaust port
smooth chip ejection and integrated vacuum adapter

0-45° adjustable cutting angle

0-66mm adjustable cutting depth



Accessories & Package
• Saw Blade • Hex Wrench • Auxiliary Handle • Fixing Plate
• Dust Port Assembly • Carbon Brush • Color Box Packing

Rated Power Input	1100W
No-load Speed	5600/min
Blade Dia.	Φ185mm
Blade Bore	Φ20mm
Max. Cutting Capacity	66mm
Max. Cutting Angle	45°
Net Weight	3.8kg

KMY07-185

ELECTRIC CIRCULAR SAW



Rated Power Input	1500W
No-load Speed	5300/min
Blade Dia.	Φ185mm
Blade Bore	Φ20mm
Max. Cutting Capacity	64mm
Max. Cutting Angle	45°
Net Weight	4.1kg

Features
1. 1500W powerful motor, high-efficiency cutting;
2. 0-45° angle adjustment, for various machining requirements;
3. Ergonomic front grip and handle, for comfortable operation;
4. Rear dust exhaust port, smooth chip ejection and integrated vacuum adapter.

Accessories & Package
• Hex Wrench • Fixing Plate • Dust Port Assembly • Color Box Packing

KMY02-235

ELECTRIC CIRCULAR SAW



Rated Power Input	2000W
No-load Speed	4100/min
Blade Dia.	Φ235mm
Blade Bore	Φ25.4mm
Max. Cutting Capacity	90° 85mm
	45° 60mm
Max. Cutting Angle	50°
Net Weight	6.5kg

Features
1. 2000W powerful motor, high-efficiency cutting;
2. 0-50° angle adjustment, for various machining requirements;
3. Efficient heat dissipation air vents, effectively extending the lifetime of products;
4. High-quality gears, for long service life.

Accessories & Package
• Special Wrench • Fixing Plate • Carbon Brush • Color Box Packing

RECOMMENDED ACCESSORIES

TCT SAW BLADE



Tungsten-cobalt alloy teeth
durable and powerful

High-quality body
high toughness; stable and reliable

TCT Saw Blade						Product Code
Diameter	Tooth Thickness (mm)	Aperture (mm)	Number of Teeth	Tooth Shape	Application Scenarios	
105 (4")	1.8	20	30T	ATB	Wood	30570600003
125 (5")	1.8	20	40T	ATB	Wood	30570600002
180 (7")	1.8	25.4	40T	ATB	Wood	30570600059
180 (7")	1.8	25.4	60T	ATB	Wood	30570600001



KJF02-30

RECIPROCATING SAW



Rated Power Input	1300W
No-load Strokes	0-2900/min
Length of Strokes	30mm
Max. Cutting Capacity	
Steel Pipe	Φ130mm
Wood	Φ255mm
Net Weight	3.8kg

Features
1. 1300W powerful motor, delivering up to 2900/min no-load speed;
2. External carbon brush, convenient for replacement;
3. Efficient heat dissipation air vents, effectively extending the lifetime of products;
4. Tool-less blade change system, for fast, onvenient blade insertion and ejection;
5. Adjustable Base Plate, applicable to different working conditions.

Accessories & Package
• Saw Blade (Wood) • Saw Blade(Iron) • Carbon Brush • Plastic Case Packing

KMQ65K

JIG SAW



Rated Power Input	600W
No-load Strokes	500-3000/min
Bevel Cutting Angle	0-45°Left/ Right
Max. Cutting Capacity	Steel 10mm
	Wood 65mm
Net Weight	2.5kg

Features
1. 600W powerful motor;
2. 4 orbital-action settings, for increased cutting performance;
3. Tool-less blade change system, for faster blade installation and removal;
4. D-shaped rubberized handle, comfortable to hold;
5. 0-45° bevel angle adjustment, meeting different cutting requirements.

Accessories & Package
• Protective Guard • Saw Blade (3pcs) • Hex Wrench • Anti-cracking Baseplate
• Plastic Liner Panel • Carbon Brush • Color Box Packing

KMQ85S

JIG SAW




Variable speed switch
for a variety of applications

580W high quality motor

4 orbital-action settings
for increased cutting performance

0-45° bevel angle adjustment
meeting different cutting requirements

LOAD ENDURANCE TEST

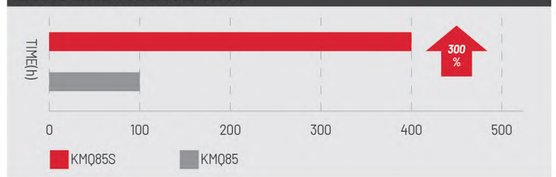



Accessories & Package
• Saw Blade(3pcs) • Hex Wrench(2pcs) • Blade Gauge
• Plastic Base • Color Box Packing

Rated Power Input	580W
No-load Strokes	500-3100/min
Bevel Cutting Angle	0-45°Left/ Right
Max. Cutting Capacity	Steel 10mm
	Wood 85mm
Net Weight	2.7kg

*Specifications may differ from country to country.

EXCELLENT STONE CUTTING PERFORMANCE



KZE06-110
KZE03-125

MARBLE CUTTER

1800W POWERFUL MOTOR
for high-efficiency cutting



0-45° ADJUSTABLE CUTTING ANGLE
for various machining requirements



EFFICIENT HEAT DISSIPATION AIR VENTS
effectively extending the lifetime of the products

LABYRINTH DUSTPROOF STRUCTURE

KZE02-110

MARBLE CUTTER



Rated Power Input	1240W
Blade Dia.	Φ110mm
Blade Bore	Φ20mm
Max. Cutting Capacity	30mm
No-load Speed	13000/min
Net Weight	3.1kg

Features
1. 1240W high quality motor;
2. 0-30 mm adjustable cutting depth;
3. Efficient heat dissipation air vents, effectively extending the lifetime of products;
4. Ergonomic handle design, for comfortable operation.

Accessories & Package
• Socket Wrench • Open-end Wrench • Carbon Brush • Color Box Packing

KZE02-110S

MARBLE CUTTER



Rated Power Iuput	1400W
Blade Dia.	Φ110mm
Blade Bore	Φ20mm
Max. Cutting Capacity	30mm
Bevel Cutting Angle	0-45°
No-load Speed	13850/min
Net Weight	3.0kg

Features
1. 1400W powerful motor, for high-efficiency cutting;
2. 0-30 mm adjustable cutting depth;
3. Efficient heat dissipation air vents, effectively extending the lifetime of products;
4. Ergonomic handle design, for comfortable operation.

Accessories & Package
• Diamond Saw Blade • Socket Wrench • Open-end Wrench • Carbon Brush • Color Box Packing

KZE06-110

MARBLE CUTTER



Rated Power Input	1800W
Blade Dia.	Φ110mm
Blade Bore	Φ20mm
Max. Cutting Capacity	30mm
Bevel Cutting Angle	0-45°
No-load Speed	13500/min
Net Weight	3.3kg

Features
1. 1800W powerful motor, for high-efficiency cutting;
2. 0-45° adjustable cutting angle, for various machining requirements;
3. Efficient heat dissipation air vents, effectively extending the lifetime of products;
4. Labyrinth dustproof structure.

Accessories & Package
• Socket Wrench • Open-end Wrench • Carbon Brush • Color Box Packing



RECOMMENDED ACCESSORIES

DIAMOND SAW BLADE——SUITABLE FOR MARBLE CUTTER







Specification	Application Scenarios	Product Code
115×20×1.8mm	General Purpose	30570100044
112×20×2.0mm (No.5)	Granite , Marble	30570100005
105×20×1.2mm	Vitrified Brick	30570100045

*Specifications may differ from country to country.

KZE03-125

MARBLE CUTTER



Rated Power Iuput	1800W
No-load Speed	13500/min
Blade Dia.	Φ125mm
Blade Bore	Φ22.2mm
Max. Cutting Capacity	38.5mm
Bevel Cutting Angle	0-45°
Net Weight	3.3kg

Features

1. 1800W powerful motor, for high-efficiency cutting;
2. 0-45° adjustable cutting angle, for various machining requirements;
3. Efficient heat dissipation air vents, effectively extending the lifetime of products;
4. External carbon brush, convenient for replacement.

Accessories & Package

• Socket Wrench • Open-end Wrench • Color Box Packing

KZE180S

MARBLE CUTTER



Rated Power Iuput	1900W
No-load Speed	5500/min
Blade Dia.	Φ180mm
Blade Bore	Φ25.4mm
Max.Cutting Capacity	58mm
Net Weight	7.0kg

Features

1. 1900W powerful motor, high-efficiency cutting;
2. Efficient heat dissipation air vents, effectively extending the lifetime of products;
3. Ergonomic handle, for comfortable operation;
4. Adjustable cutting depth, for various machining requirements.

Accessories & Package

• Socket Wrench • Auxiliary Handle • Open-end Wrench • Carbon Brush
• Color Box Packing

KZR125S

GROOVE CUTTER



Rated Power Input	1800W
Blade Dia.	Φ125mm
No-load Speed	13000/min
Max. Cutting Depth	37.5mm
Max. Cutting Width	50mm
Net Weight	4.1kg

Features

1. 1800W powerful motor, for efficient groove cutting;
2. Dual-blade cutting system, ensures efficient groove machining;
3. Adjustable grooving depth and width, for various machining requirements;
4. Labyrinth dustproof structure, effectively extending the lifetime of products.

Accessories & Package

• Diamond Saw Blade(2pcs) • Socket Wrench • Open-end Wrench • Auxiliary Handle
• Carbon Brush • Color Box Packing

KZR195BL

BRUSHLESS GROOVE CUTTER

BRUSHLESS MOTOR



Rated Power Iuput	13A
No-load Speed	7500/min
Blade Dia.	Φ195mm
Max.Cutting Capacity	63mm
Net Weight	2.7kg

Features

1. High quality and powerful brushless PM motor, for efficient groove cutting;
2. 2.7kg lightweight body, lightweight and easy to operate;
3. Intelligent control, multiple protections, effectively extending the lifetime of products;
4. 63mm Max. cutting depth.

Accessories & Package

• Socket Wrench • Open-end Wrench • Color Box Packing

KJX255

ELECTRIC MITRE SAW



Rated Power Input		1650W	
Hole Dia. of Blade		Φ25.4mm	
No-load Speed		4600/min	
Blade Dia.		Φ255mm	
Net Weight		12.0kg	
Max.Cutting Capacity (HxW)	Miter Angle	0°	45° Left and Right
	Bevel Angle		
	0°	93x135mm	93x94mm
	45°Left	53x135mm	49x94mm

Features

1. 1650W powerful motor, for efficient cutting;
2. Gear transmission structure, for good durability;
3. Precision machined aluminum base, for stable cutting;
4. 0-45° Bevel cutting, applicable to different cutting conditions.

Accessories & Package

• Vertical Vise Assembly • Holder Assembly(2pcs) • Dust Bag Assembly • Socket Wrench
• Triangle Ruler • Carbon Brush • Color Box Packing



KJX05-255

BRUSHLESS MOTOR

ELECTRIC BRUSHLESS MITRE SAW



Rated Power Input		1100W	
Hole Dia. of Blade		Φ25.4mm	
No-load Speed		4500/min	
Blade Dia.		Φ255mm	
Net Weight		11.0kg	
Max.Cutting Capacity (HxW)	Miter Angle	0°	45° Left and Right
	Bevel Angle		
	0°	80x110mm	80x77mm
	45°Left	45x110mm	45x77mm

Features

1. High quality and powerful brushless PM motor, for efficient cutting;
2. Gear transmission structure, for good durability;
3. Precision machined aluminum base, for stable cutting;
4. Rear dust exhaust port, smooth chip ejection and integrated vacuum adapter.

Accessories & Package

• Vertical Vise Assembly • Holder Assembly(2pcs) • Dust Bag Assembly • Socket Wrench
• Triangle Ruler • Color Box Packing

KJX06-255

SLIDE COMPOUND MITRE SAW



Rated Power Input		1650W	
Hole Dia. of Blade		Φ25.4mm	
No-load Speed		4600/min	
Blade Dia.		Φ255mm	
Net Weight		18.5kg	
Max.Cutting Capacity (HxW)	Miter Angle	0°	45° Left and Right
	Bevel Angle		
	0°	94x315mm	94x223mm
	45°Left	49x315mm	49x223mm

Features

1. 1650W powerful motor, for efficient cutting;
2. Gear transmission structure, for good durability;
3. Sliding rail device, for wide cutting range;
4. Precision machined aluminum base, for stable cutting.

Accessories & Package

• TCT Saw Blade • Vertical Vise Assembly • Holder Assembly(2pcs) • Dust Bag Assembly
• Socket Wrench • Triangle Ruler • Carbon Brush • Carton Packing



YouTube
Watch the video

KEC2600-355

ELECTRIC CUT-OFF MACHINE

2600W POWERFUL MOTOR
high-efficiency cutting



EFFICIENT HEAT DISSIPATION AIR VENTS
effectively extending the lifetime of products



TOOL-LESS VISE ADJUSTMENT
for quick workpiece clamping



ERGONOMIC D-SHAPED HANDLE
for comfortable operation



THICKENED AND REINFORCED BASE
for increased durability

*Specifications may differ from country to country.

KJG04-355S

ELECTRIC CUT-OFF MACHINE



Rated Power Input	2200W
No-load Speed	3800/min
Miter Cutting Angle	0~45°
Max.Cutting Capacity	
Pipe	Φ115mm
Profiled Bar	115x130mm
Wheel Size	Φ355x3xΦ25.4mm
Net Weight	15.6kg

Features
1. 2200W powerful motor, for high-efficiency cutting;
2. Efficient heat dissipation air vents, effectively extending the lifetime of products;
3. Ergonomic D-shaped handle, for comfortable operation;
4. Thickened and reinforced base, for increased durability.

Accessories & Package
• Wrench • Carbon Brush • Color Box Packing



KEC2600-355

ELECTRIC CUT-OFF MACHINE

NEW



Rated Power Input	2600W
No-load Speed	3900/min
Miter Cutting Angle	0~45°
Max. Cutting Capacity	
Pipe	Φ115mm
Profiled Bar	115x130mm
Wheel Size	Φ355x3xΦ25.4mm
Net Weight	14.5kg

Features
1. 2600W powerful motor, high-efficiency cutting;
2. Efficient heat dissipation air vents, effectively extending the lifetime of products;
3. Thickened and reinforced base, for increased durability.

Accessories & Package
• Wrench • Color Box Packing

KJG09-355S

ELECTRIC CUT-OFF MACHINE

NEW COMING SOON



Rated Power Input	2600W
No-load Speed	3900/min
Miter Cutting Angle	0~45°
Max. Cutting Capacity	
Pipe	Φ115mm
Profiled Bar	115x130mm
Wheel Size	Φ355x3xΦ25.4mm
Net Weight	14.5kg

Features
1. 2600W powerful motor, high-efficiency cutting;
2. Efficient heat dissipation air vents, effectively extending the lifetime of products;
3. Thickened and reinforced base, for increased durability.

Accessories & Package
• Wrench • Color Box Packing

RECOMMENDED ACCESSORIES

CUT OFF WHEEL



High-quality resin
strong and durable

Thickening steel ring
more powerful and safer

Specification	Material	Net	Packing (pcs)	Product Code
355×2.5×25.4mm	A30T-BF	Single	30	30572100012

KJJ25

ELECTRIC SHEAR



Rated Power Input	710W
No-load Strokes	2200/min
Max.Cutting Capacities	
Steel 400N/mm²	2.5mm
Steel 600N/mm²	2.0mm
Steel 800N/mm²	2.0mm
Aluminum 250N/mm²	3.2mm
Min.Cutting Radius	45mm
Net Weight	2.3kg

Features
1. 710W powerful motor;
2. High strength gear box, robust and durable;
3. Efficient heat dissipation air vents, effectively extending the lifetime of products;
4. High-quality cutting blade, sharp and durable.

Accessories & Package
• Hex Wrench • Gauge • Carbon Brush • Color Box Packing

KJJ32

ELECTRIC SHEAR



Rated Power Input	710W
No-load Strokes	1600/min
Max.Cutting Capacities	
Steel 400N/mm²	3.2mm
Steel 600N/mm²	2.5mm
Steel 800N/mm²	1.0mm
Aluminum 250N/mm²	3.5mm
Min.Cutting Radius	50mm
Net Weight	3.8kg

Features
1. 710W powerful motor;
2. High strength gear box, robust and durable;
3. External carbon brush, convenient for replacement;
4. D-shaped rubberized handle, comfortable to hold;
5. High-quality cutting blade, sharp and durable.

Accessories & Package
• Hex Wrench • Gauge • Carbon Brush • Color Box Packing

KJH32

ELECTRIC NIBBLER



Rated Power Input	620W
No-load Strokes	1300/min
Max.Cutting Capacities	
Steel 400N/mm²	3.2mm
Steel 800N/mm²	2.5mm
Min.Cutting Radius	
Inner Dia.	120mm
Outer Dia.	128mm
Net Weight	3.8kg

Features
1. 620W powerful motor;
2. High strength gear box, robust and durable;
3. External carbon brush, convenient for replacement;
4. D-shaped rubberized handle, comfortable to hold;
5. High quality punch, punch-cutting smoothly.

Accessories & Package
• Spacer Shim • Wrench • Carbon Brush • Color Box Packing

KMD320

MULTI-TOOL



Rated Power Input	320W
Speed Shifting Gears	6(1-2-3-4-5-6)
Oscillation Angle	3°
Oscillation Frequency	11000-20000/min
Net Weight	1.3kg

Features
1. High frequency swing, easy cutting, 3° oscillation movement allows quick completion of professional applications into materials such as metal, wood and plastic ;
2. General-purpose interface, matched different accessories, widely applications;
3. 6-speed adjustment, meeting different working conditions;
4. 1.3kg lightweight body;
5. Efficient heat dissipation air vents, effectively extending the lifetime of products.

Accessories & Package
• Adaptor for Tool Holder • HCS Cut Saw Blade • Cut Saw Blade(2pcs) • Segment Saw Blade • Scraper • Sanding Plate • Abrasive Paper(12pcs) • File Holder Assembly • Accessory Locking Parts • Hex Wrench • Carbon Brush • Color Box Packing

KMB82

ELECTRIC PLANER



Rated Power Input	500W
Max.Planing Width	82mm
Max.Planing Depth	1mm
No-load Speed	16000/min
Net Weight	2.6kg

Features
1. 500W high quality motor;
2. 1mm Max. planing depth;
3. Double-rolling blades, easy planing wood;
4. Belt drive, good toughness, wear resistance and easy replacement.

Accessories & Package
• Blade • Sharpening Holder Assembly • Blade Gauge • Socket Wrench • Guide Plate Assembly • Carbon Brush • Color Box Packing



KMB110

ELECTRIC PLANER



Rated Power Input	840W
Max.Planing Width	110mm
Max.Planing Depth	2mm
No-load Speed	16500/min
Net Weight	4.2kg

Features
1. 2mm Max. planing depth;
2. 840W powerful motor, high-efficiency planing;
3. Double-rolling blades, planing wood effortless;
4. Belt drive, high toughness and wear resistance, easy to replace.

Accessories & Package
• Blade • Sharpening Holder Assembly • Blade Gauge • Socket Wrench • Guide Plate Assembly • Carbon Brush • Color Box Packing

KMP02-6

TRIMMER



Rated Power Input	350W
No-load Speed	30000/min
Collet Size	Φ6mm/Φ6.35mm
Net Weight	1.8kg

Features
1. Plastic body, heat-insulating and non-scalding;
2. Transparent housing, convenient to observe the trimming situation.

Accessories & Package
• Collet Chuck • Open-end Wrench(2pcs) • Straight Guide Assembly • Templet Guide Assembly • Trimmer Guide Assembly • Carbon Brush • Color Box Packing

*Specifications may differ from country to country.

KMP03-6

TRIMMER



Rated Power Input	530W
No-load Speed	30000/min
Collet Size	Φ6mm/Φ6.35mm
Net Weight	1.8kg

Features

1. Plastic body, heat-insulating and non-scalding;
2. Transparent housing, convenient to observe the trimming situation.

Accessories & Package

• Wrench (2pcs) • Straight Guide • Templet Guide • Trimmer Guide Assembly
• Carbon Brush • Color Box Packin

KMP04-6B

TRIMMER



Rated Power Input	550W
No-load Speed	30000/min
Collet Size	Φ6mm/Φ6.35mm
Net Weight	1.8kg

Features

1. Strong aluminum body, sturdy and durable;
2. Transparent housing, convenient to observe the trimming situation;
3. Degree scale on the body, more precise processing depth.

Accessories & Package

• Collet Chuck • Open-end Wrench(2pcs) • Carbon Brush • Color Box Packing

KMP04-6

TRIMMER



External carbon brush
convenient replacement

Strong aluminum body
sturdy and durable



Fitted with different 6.35 mm (1/4") milling cutters
meeting multiple applications

Transparent housing
convenient to observe the trimming situation



Accessories & Package

• Collet Chuck • Open-end Wrench(2pcs) • Straight Guide Assembly • Templet Guide • Trimmer Guide Assembly • Carbon Brush • Color Box Packing

Rated Power Input	550W
No-load Speed	30000/min
Collet Size	Φ6mm/Φ6.35mm
Net Weight	1.6kg



One wrench to hold it in place
One wrench to loosen the collet



Mounting milling cutter



Locking Collet

KMR8S

WOOD ROUTER



Rated Power Input	900W
Max. Milling Cutter Dia.	Φ8mm
No-load Speed	26000/min
Net Weight	2.9kg

Features

1. 900W high quality motor;
2. 1mm depth pre-conditioning precise control, meeting your needs for fine carving;
3. Labyrinth dustproof structure, effectively extending the lifetime of products;
4. Thickened base, sturdy and durable.

Accessories & Package

• Hinge Boring Bit • Collet Chuck(2pcs) • Open-end Wrench • Special Wrench
• Straight Guide Assembly • Carbon Brush • Color Box Packing

KMR02-12

WOOD ROUTER



Rated Power Input	1850W
Max. Milling Cutter Dia.	Φ12.7mm
No-load Speed	22000/min
Net Weight	6.0kg

Features

1. 1850W powerful motor;
2. Thickened base, sturdy and durable;
3. 1mm depth precise control, meeting your needs for fine carving;
4. Labyrinth dustproof structure, effectively extending the lifetime of products.

Accessories & Package

• Collet(2pcs) • Open-end Wrench(2pcs) • Straight Guide Assembly • Templet Guide
• Trimmer Guide Assembly • Retainer Base Assembly • Carbon Brush • Color Box Packing

POWER ALONG THE ROUTE



KMR06-12

WOOD ROUTER

2000W POWERFUL MOTOR



6-SPEED ELECTRONIC GEAR SHIFT
meeting different working conditions

LABYRINTH DUSTPROOF STRUCTURE
effectively extending the lifetime of products

ELECTRONIC CONSTANT SPEED CONTROL
maintaining constant speed under load

SOFT START FUNCTION
smooth start-up

*Specifications may differ from country to country.

KMR06-12

WOOD ROUTER



Rated Power Input	2000W
Max. Milling Cutter Dia.	Φ12.7mm
No-load Speed	9000-22000/min
Net Weight	5.8kg

Features

1. 2000W powerful motor;
2. 6-speed adjustment, applicable to different working conditions;
3. 1mm depth pre-conditioning precise control, meeting your needs for fine carving;
4. Thickened base, sturdy and durable.

Accessories & Package

• Collet(2pcs) • Open-end Wrench(2pcs) • Straight Guide Assembly • Templet Guide
• Trimmer Guide Assembly • Retainer Base Assembly • Carbon Brush • Color Box Packing

KMR06-12B

WOOD ROUTER



Rated Power Input	2000W
Max. Milling Cutter Dia.	Φ12.7mm
No-load Speed	22000/min
Net Weight	5.6kg

Features

1. 2000W powerful motor;
2. Labyrinth dustproof structure, effectively extending the lifetime of products;
3. 1mm depth pre-conditioning precise control, meeting your needs for fine carving;
4. Thickened base, sturdy and durable.

Accessories & Package

• Collet (6.35mm) • Open-end Wrench(2pcs) • Straight Guide Assembly • Templet Guide
• Trimmer Guide Assembly • Retainer Base Assembly • Color Box Packing

KVC15

VACUUM CLEANER



Rated Power Input	1200W
Capacity	15L
Max. Vacuum Pressure	17.5kPa
Max. Air Volume	28L/s
Cooling System	Recycle
Net Weight	7.6kg

Features

1. 1200W powerful motor, delivering Max. 17.5kPa vacuum pressure, for efficient vacuum;
2. Dry and wet dual-purpose, meeting different vacuum scenarios;
3. IPX4 waterproof, for safe operation.

Accessories & Package

• Dust Cleaning Brush • Water Cleaning Brush • Crevice Nozzle • Flat Suction Nozzle
• Round Brush • Telescopic Steel Pipe • Hose Assembly • Carton Packing

KVC30

VACUUM CLEANER



Rated Power Input	1200W
Capacity	30L
Max. Vacuum Pressure	18.5kPa
Max. Air Volume	30L/s
Cooling System	Recycle
Net Weight	8.8kg

Features

1. 1200W powerful motor, delivering Max. 18.5kPa vacuum pressure, for efficient vacuum;
2. Dry and wet dual-purpose, meeting different vacuum scenarios;
3. IPX4 waterproof, for safe operation.

Accessories & Package

• Dust Cleaning Brush • Water Cleaning Brush • Crevice Nozzle • Flat Suction Nozzle
• Round Brush • Telescopic Steel Pipe • Hose Assembly • Curved Steel Pipe (2pcs)
• Carton Packing

KVC60

VACUUM CLEANER



Rated Power Input	2300W(dual motors)
Capacity	60L
Max. Vacuum Pressure	17.5kPa
Max. Air Volume	42L/s
Cooling System	Recycle
Net Weight	24kg

Features

1. Dual-motor design, delivering Max. 17.5kPa vacuum pressure, for efficient vacuum;
2. Dry and wet dual-purpose, meeting different vacuum scenarios;
3. IPX4 waterproof, for safe operation.

Accessories & Package

• Dust Cleaning Brush • Water Cleaning Brush • Crevice Nozzle • Flat Suction Nozzle
• Round Brush • Telescopic Steel Pipe • Hose Assembly • Curved Steel Pipe (2pcs)
• Carton Packing

KVC80

VACUUM CLEANER



Rated Power Input	3200W(Three motors)
Capacity	80L
Max. Vacuum Pressure	18.5kPa
Max. Air Volume	48L/s
Cooling System	Recycle
Net Weight	26.5kg

Features

1. Three-motors design, delivering Max. 18.5kPa vacuum pressure, for efficient vacuum;
2. Dry and wet dual-purpose,meeting different vacuum scenarios;
3. IPX4 waterproof, for safe operation.

Accessories & Package

• Dust Cleaning Brush • Water Cleaning Brush • Crevice Nozzle • Flat Suction Nozzle
• Round Brush • Telescopic Steel Pipe • Hose Assembly • Curved Steel Pipe (2pcs)
• Carton Packing

KQF32

BLOWER VACUUM



Rated Power Input	680W
No-load Speed	8300-16300/min
Air Volume	56-113CFM(1.6-3.2m³/min)
Net Weight	1.8kg

Features

1. 680W powerful motor;
2. 113CFM (3.2m³/min) Max. air volume;
3. 1.8kg lightweight body design, for convenient operation;
4. 6-speed adjustable control, meeting different working conditions.

Accessories & Package

• Blowpipe Assembly • Dust Bag Assembly • Carbon Brush
• Color Box Packing

KML405S

ELECTRIC CHAIN SAW



Rated Power Input	2000W
No-load Speed	420m/min
Max. Length Of Guide Bar	405mm(16")
Net Weight	5.6kg

Features

1. 2000W powerful motor;
2. Aluminum gearbox, sturdy and durable;
3. Widened guard design, blocking sawdust and protecting users;
4. 420m/min chain speed, for efficient and smooth cutting.

Accessories & Package

• Saw Chain • Guide Bar • screwdriver • Socket Wrench • Color box packing



KQU02-160

ELECTRIC MIXER



Rated Power Input	1010W
No-load Speed	620/min
Stirring Paddle Dia.	160mm
Stirring Paddle Thread Dia.	M12
Net Weight	2.7kg

Features

1. 1010W powerful motor;
2. External carbon brush, convenient for replacement;
3. D-shaped handle, comfortable to hold;
4. Auxiliary handle, providing great control for mixing applications;
5. High strength gear box, robust and durable.

Accessories & Package

• Stirring Paddle Assembly(Φ160mm) • Auxiliary Handle • Carbon Brush • Color Box Packing

KQU02-160B

ELECTRIC MIXER



Rated Power Input	1010W
No-load Speed	620/min
Stirring Paddle Dia.	160mm
Stirring Paddle Thread Dia.	M12
Net Weight	2.7kg

Features

1. 1010W powerful motor;
2. External carbon brush, convenient for replacement;
3. D-shaped handle, comfortable to hold;
4. Auxiliary handle, providing great control for mixing applications.

Accessories & Package

• Stirring Paddle Assembly(Φ120mm) • Auxiliary Handle • Carbon Brush • Color Box Packing

KQU06-160

ELECTRIC MIXER



Rated Power Input	2000W
No-load Speed	500/min
Stirring Paddle Dia.	160mm
Stirring Paddle Thread Dia.	M14
Net Weight	5.1kg

Features

1. 2000W powerful motor;
2. External carbon brush, convenient for replacement;
3. Auxiliary handle, providing great control for mixing applications;
4. High strength gear box, sturdy and durable.

Accessories & Package

• Stirring Paddle Assembly Φ220mm(Individually Packed in Carton)
• Auxiliary Handle • Carbon Brush • Color Box Packing

KQB03-2000

HEAT GUN



Rated Power Input	2000W
Temperature	
Low Temperature	50℃
Middle Temperature	50-630℃
High Temperature	50-630℃
Air Flow	
Low Temperature	300L/min
Middle Temperature	300L/min
High Temperature	500L/min
Net Weight	0.7kg

Features

1. Digital display, a clear display of the temperature;
2. 3-gear adjustable temperature and air flow;
3. Stainless steel nozzle, durable and well-distributed air-out.

Accessories & Package

• Flat Wind Tube • Round Wind Tube • Color Box Packing

KQB04-2000

HEAT GUN



Rated Power Input	2000W
Temperature	
Low Temperature	50℃
Middle Temperature	50-480℃
High Temperature	50-600℃
Air Flow	
Low Temperature	210-250L/min
Middle Temperature	210-250L/min
High Temperature	340-380L/min
Net Weight	0.8kg


Features

1. 3-gear adjustable temperature and air flow;
2. Stainless steel nozzle, durable and well-distributed air-out;
3. Double heating wires, for fast heating.

Accessories & Package

• Flat Wind Tube • Round Wind Tube • Color Box Packing

*Specifications may differ from country to country.

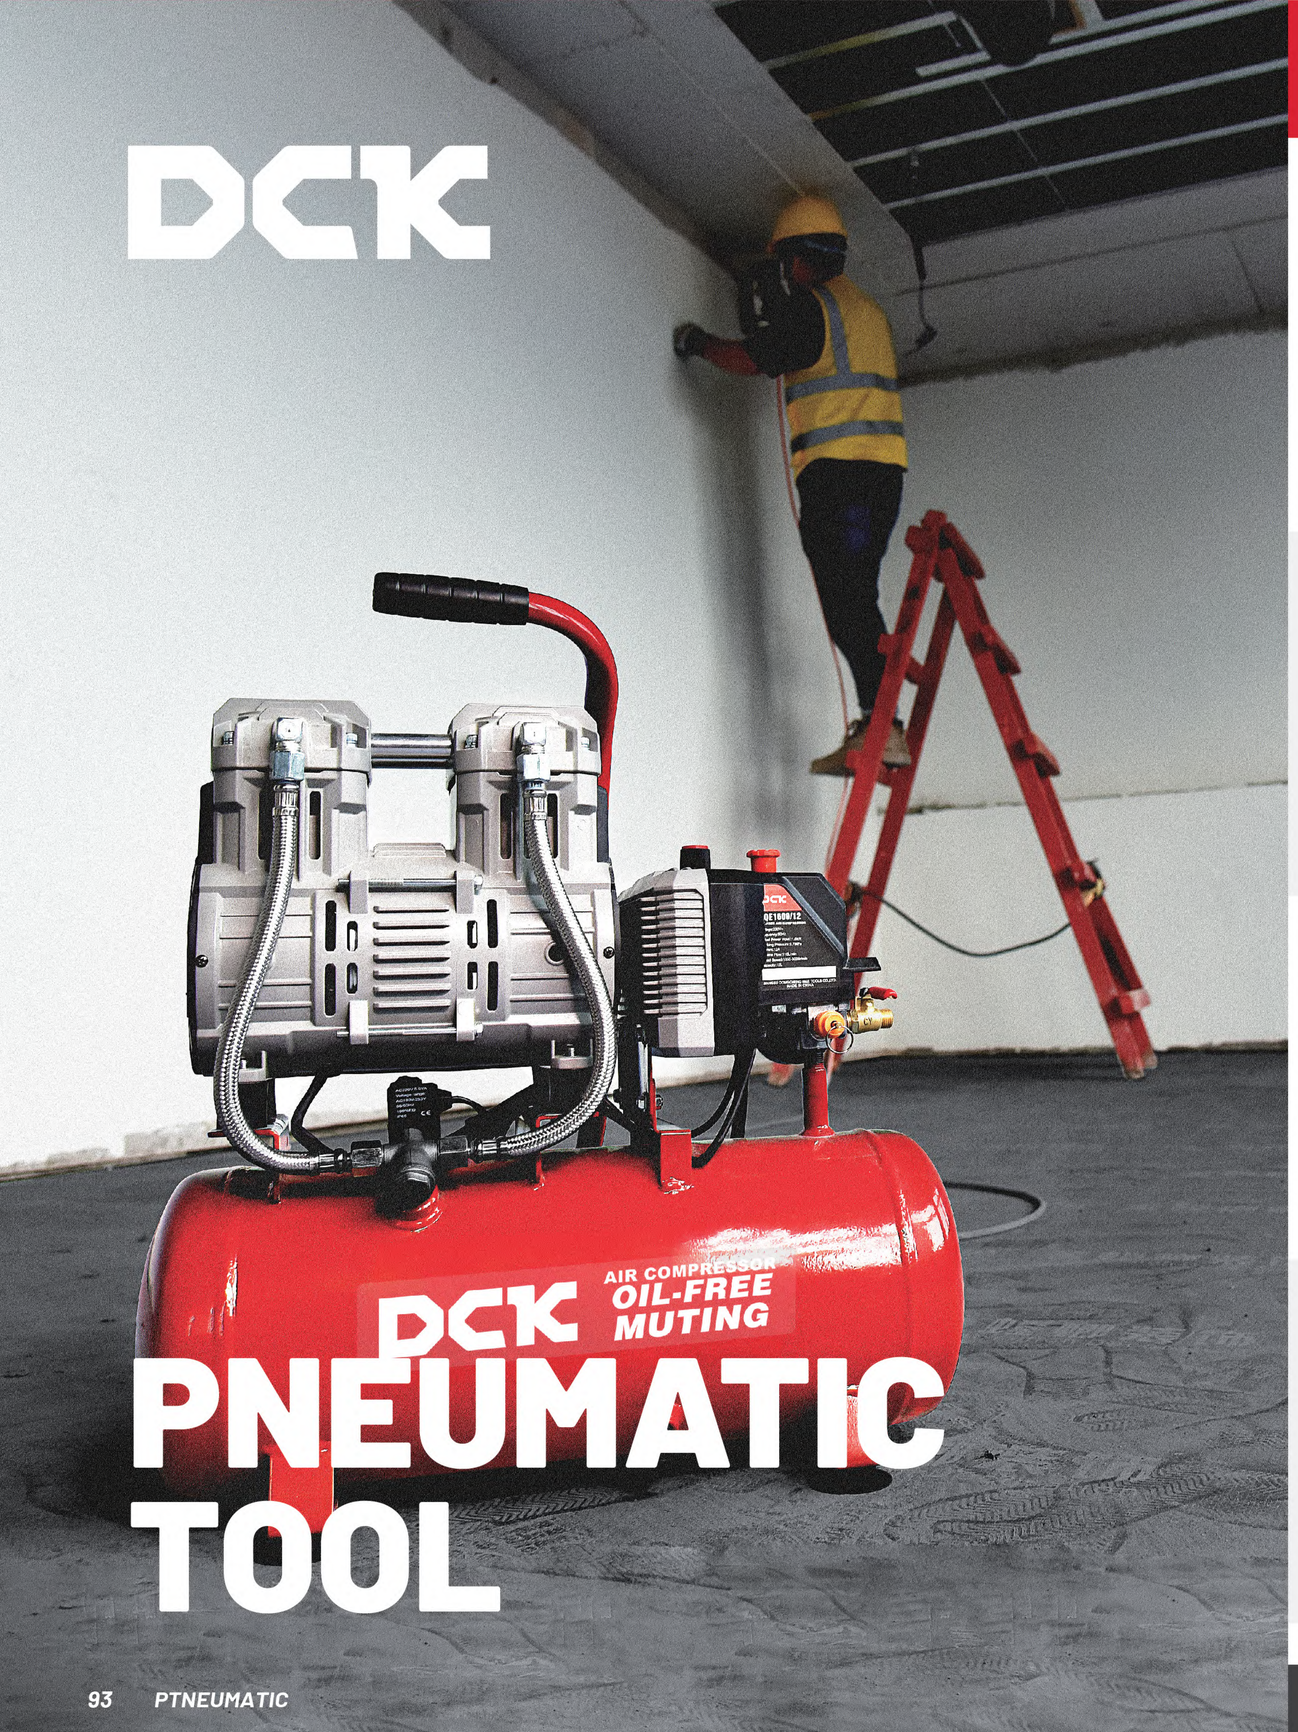

K05-F30

AIR BRAD NAILER

NEW



Working Pressure	4-8bar
Inner Dia. Of Air Pipe	5mm
Capacity of Magazine	100pcs
Nail Type	Brad Nail
Nail Size	1.26×1.05×30(max)mm
Net Weight	1.0kg

Features

1. All-aluminum body, lightweight and durable;
2. Switch with safety lock, for safe operation;
3. Tool-free nose piece, for fast jam clearing and maintenance;
4. Aluminum alloy nail magazine, 100pcs large capacity.

Accessories & Package

• Hex Wrench • Oil Bottle • Color Box Packing

K05-T50DC

AIR BRAD NAILER

NEW



Working Pressure	4-8bar
Inner Dia. Of Air Pipe	5mm
Capacity of Magazine	100pcs
Nail Type	Brad Nail
Nail Size	1.6×1.4×50(max)mm
Net Weight	1.9kg

Features

1. All-aluminum body, sturdy and durable;
2. Nose with safety device, for safe operation;
3. High-temperature punching muzzle, for high hardness and long service time;
4. Aluminum alloy nail magazine, 100pcs large capacity.

Accessories & Package

• Hex Wrench • Oil Bottle • Color Box Packing

K05-T50G

AIR BRAD NAILER

NEW



Working Pressure	4-8bar
Inner Dia. Of Air Pipe	5mm
Capacity of Magazine	100pcs
Nail Type	Brad Nail
Nail Size	1.6×1.4×50(max)mm
Net Weight	1.85kg

Features

1. All-aluminum body, sturdy and durable;
2. Nose with safety device, for safe operation;
3. Tool-free nose piece, for fast jam clearing and maintenance;
4. Aluminum alloy nail magazine, 100pcs large capacity.

Accessories & Package

• Hex Wrench • Oil Bottle • Color Box Packing

K05-1013J

AIR STAPLER

NEW



Working Pressure	4-8 bar
Inner Dia. Of Air Pipe	5mm
Capacity of Magazine	100pcs
Nail Type	Staple
Nail Size	0.6×10×13(max)mm
Net Weight	0.82kg

Features

1. All-aluminum body, lightweight and durable;
2. Switch with safety lock, for safe operation;
3. Tool-free nose piece, for fast jam clearing and maintenance;
4. Aluminum alloy nail magazine, 100pcs large capacity.

Accessories & Package

• Hex Wrench • Oil Bottle • Color Box Packing

K05-1022J

AIR STAPLER

NEW



Working Pressure	4-8bar
Inner Dia. Of Air Pipe	5mm
Capacity of Magazine	100pcs
Nail Type	Staple
Nail Size	0.6×10×22(max)mm
Net Weight	1.11kg

Features

1. All-aluminum body, lightweight and durable;
2. Switch with safety lock, for safe operation;
3. Tool-free nose piece, for fast jam clearing and maintenance;
4. Aluminum alloy nail magazine, 100pcs large capacity.

Accessories & Package

• Hex Wrench • Oil Bottle • Color Box Packing

K05-422J

AIR STAPLER

NEW



Working Pressure	4-8bar
Inner Dia. Of Air Pipe	5mm
Capacity of Magazine	100pcs
Nail Type	Staple
Nail Size	0.6×4×22(max)mm
Net Weight	1.02kg

Features

1. All-aluminum body, lightweight and durable;
2. Switch with safety lock, for safe operation;
3. Tool-free nose piece, for fast jam clearing and maintenance;
4. Aluminum alloy nail magazine, 100pcs large capacity.

Accessories & Package

• Hex Wrench • Oil Bottle • Color Box Packing

K05-P625

AIR PIN NAILER

NEW



Working Pressure	4-8bar
Inner Dia. Of Air Pipe	5mm
Capacity of Magazine	100pcs
Nail Type	Pin Nail
Nail Size	Φ0.63×25(max)mm
Net Weight	0.82kg

Features

1. All-aluminum body, lightweight and durable;
2. Switch with safety lock, for safe operation;
3. Aluminum alloy nail magazine, 100pcs large capacity.

Accessories & Package

• Hex Wrench • Oil Bottle • Color Box Packing

K05-ST64C

AIR CONCRETE NAILER

NEW



Working Pressure	4-8bar
Inner Dia. Of Air Pipe	5mm
Capacity of Magazine	70pcs
Nail Type	Steel Nail
Nail Size	Φ2.2(18-64)mm
Net Weight	2.85kg

Features

1. All-aluminum body, sturdy and durable;
2. Nose with safety device, for safe operation;
3. Aluminum alloy nail magazine, 100pcs large capacity;
4. Rubberized handle, comfortable to hold.

Accessories & Package

• Hex Wrench • Oil Bottle • Color Box Packing

*Specifications may differ from country to country.

K05-ST64G

AIR CONCRETE NAILER

NEW



Working Pressure	4-8bar
Inner Dia. Of Air Pipe	5mm
Capacity of Magazine	70pcs
Nail Type	Steel Nail
Nail Size	Φ2.2(18-64)mm
Net Weight	2.85kg

Features

1. All-aluminum body, sturdy and durable;
2. Nose with safety device, for safe operation;
3. Tool-free nose piece, for fast jam clearing and maintenance;
4. Aluminum alloy nail magazine, 100pcs large capacity.

Accessories & Package

• Hex Wrench • Oil Bottle • Color Box Packing

K05-ST38

AIR CONCRETE NAILER

NEW



Working Pressure	4-8bar
Inner Dia. Of Air Pipe	5mm
Capacity of Magazine	65pcs
Nail Type	Steel Nail
Nail Size	Φ2.2(18-38)mm
Net Weight	1.98kg

Features

1. All-aluminum body, lightweight and durable;
2. Switch with safety lock, for safe operation;
3. Aluminum alloy nail magazine, 100pcs large capacity.

Accessories & Package

• Hex Wrench • Oil Bottle • Color Box Packing

OVERVIEW OF AIR COMPRESSOR

Mode	Product Picture	Product Parameters						Product Features			
		Power (W)	Capacity (L)	Displacement (L/min)	Filling Time (S)	Number Of Nail Guns That Can Be Connected Simultaneously (30mm Size Nail Gun)	Noise (dB)	Portable	Fast Filling	Low Noise	Speed Regulation
KQE1680/15		1680	15	100	38	4	72	●	●		
KQE1680/30		1680	30	100	71	4	72		●		
KQE1680×2/50		1680×2	50	200	71	7	76		●		
KQE1680×3/90		1680×3	90	300	96	11	80		●		
KQE1680×4/120		1680×4	120	400	102	15	80		●		
KQE1600/12		1600	12	110	38-20	5	53-79	●	●	●	●
KQE1600/24		1600	24	110	75-32	5	53-79		●	●	●

KQE1680/15

OIL-FREE AIR COMPRESSOR

NEW



Rated Power Input	1680W
Max Working Pressure	8bar
Rated Speed	2850/min
Capacity	15L
Max. Displacement	100L/min
Net Weight	16.4kg

Features

1. 1680W induction motor, efficient and durable;
2. 8bar working pressure output;
3. Dual-cylinder compression design, for fast inflation;
4. Oil-free design, providing clean air source.

Accessories & Package

• Foot Pad Assembly(4pcs) • Carton Packing

KQE1680/30

OIL-FREE AIR COMPRESSOR

NEW



Rated Power Input	1680W
Max Working Pressure	8bar
Rated Speed	2850/min
Capacity	30L
Max. Displacement	100L/min
Net Weight	19.5kg

Features

1. 1680W induction motor, efficient and durable;
2. 8bar working pressure output;
3. Dual-cylinder compression design, for fast inflation;
4. Oil-free design, providing clean air source.

Accessories & Package

• Foot Pad Assembly • Wheel Assembly(2pcs) • Carton Packing

KQE1680×2/50

OIL-FREE AIR COMPRESSOR

NEW



Rated Power Input	1680W×2
Max Working Pressure	8bar
Rated Speed	2850/min
Capacity	50L
Max. Displacement	200L/min
Net Weight	37.1kg

Features

1. 1680W induction motor, efficient and durable;
2. 8bar working pressure output;
3. Dual-cylinder compression design, for fast inflation;
4. Oil-free design, providing clean air source.

Accessories & Package

• Foot Pad Assembly(2pcs) • Wheel Assembly(2pcs) • Carton Packing

KQE1680×3/90

OIL-FREE AIR COMPRESSOR

NEW



Rated Power Input	1680W×3
Max Working Pressure	8bar
Rated Speed	2850/min
Capacity	90L
Max. Displacement	300L/min
Net Weight	63kg

Features

1. 1680W induction motor, efficient and durable;
2. 8bar working pressure output;
3. Dual-cylinder compression design, for fast inflation;
4. Oil-free design, providing clean air source.

Accessories & Package

• Wheel Assembly(4pcs) • Carton Packing

KQE1680×4/120

OIL-FREE AIR COMPRESSOR

NEW



Rated Power Input	1680W×4
Max Working Pressure	8bar
Rated Speed	2850/min
Capacity	120L
Max. Displacement	400L/min
Net Weight	87.2kg

Features

1. 1680W induction motor, efficient and durable;
2. 8bar working pressure output;
3. Dual-cylinder compression design, for fast inflation;
4. Oil-free design, providing clean air source.

Accessories & Package

• Wheel Assembly(4pcs) • Carton Packing

KQE1600/12

DOUBLE-TUBE OIL-FREE AIR COMPRESSOR



Rated Power Input	1600W
Working Pressure	8bar
Rated Speed	1350-2900/min
Capacity	12L
Max. Displacement	110L/min
Net Weight	14.7kg

Features

1. Brushless outer rotor motor, lightweight body high power;
2. Double tube air intake, faster inflation speed;
3. Infinitely adjustable speed to meet different usage scenarios;
4. Oil-free and silent design, providing cleaner air source.

Accessories & Package

• Muffler(2pcs) • Foot Pad Assembly(4pcs) • Carton Packing

KQE1600/24

DOUBLE-TUBE OIL-FREE AIR COMPRESSOR



Rated Power Input	1600W
Working Pressure	8bar
Rated Speed	1350-2900/min
Capacity	24L
Max. Displacement	110L/min
Net Weight	17.3kg

Features

1. Brushless outer rotor motor, lightweight body high power;
2. Double tube air intake, faster inflation speed;
3. Infinitely adjustable speed to meet different usage scenarios;
4. Oil-free and silent design, providing cleaner air source.

Accessories & Package

• Muffler(2pcs) • Foot Pad Assembly • Wheel Assembly(2pcs) • Carton Packing



*Specifications may differ from country to country.