DCA PROFESSIONAL POWER TOOLS

DCA Global

www.dcatools.com

DCA 2026 PRODUCT CATALOGUE

DCA



PRODUCT CATALOGUE

PRODUCT CATALOGUE

2026 10

ABOUT US

DCA

Brand of Jiangsu DongCheng Power Tools Co., Ltd.

Jiangsu DongCheng Power Tools Co., Ltd., founded in **1995**, is one of the key backbone enterprises of the professional power tools manufacturing industry in China, the vice chairman unit of Power Tools Institute of China Electrical Equipment Industrial Association. The company covers an area of **350,000** square meters. With modern plants, first-class production and testing equipment, the construction area is **390,000** square meters. Meanwhile, there are more than **5,800** staff in the company, including a group of professional senior engineers and a senior management and technical team.

DongCheng Company manufactures various types of power tools and sets up franchised dealers around the major cities of China, and its sales networks cover more than **80** countries and regions worldwide, such as Southeast Asia, South Asia, the Middle East, Europe and America, etc.

1995
Establishment

390,000 m^2
Construction Area

350,000 m^2
Manufacturing Base

5800+
Employees

80+
Countries And Regions



DCA, owned by DongCheng Company, is a brand of professional grade power tools, which is committed to manufacturing high-quality professional grade power tools. DCA power tools are manufactured according to rigorous production standards, and are widely used building construction, decoration, stone processing, shipbuilding, water conservancy, and agriculture & garden care.

With exquisite technology and good reputation, DCA has become one of the most competitive professional power tools brands in the market. In the future, DCA will continue adhering to the mission of "Professional Power Tools, Sincere Service" and innovate constantly to provide good quality products and satisfying services to global users.

DCA Logo Change Statement

Dear customers and partners

Thank you for your continuous love and support. For further development, the company decided to use the new LOGO from now on, and will gradually replace the old one with it.

OLD

DCA

NEW

DCA

DCA

COMMON FUNCTION SYMBOL INDEX



- Lithium-Ion Technology
- Brushless Motor
- Double Insulation
- Variable Speed
- Forward/ Reverse Rotation
- Mechanical Speed Control
- Soft Start
- Over-temperature Protection
- Power-off Protection
- Spindle Lock
- Dust Collecting
- Suction& Blowing
- Quick Clamping System
- Damping System
- Safety Clutch
- Impact Function
- Triple Function
- Dual Function
- Quick Change Workhead
- AC/DC Dual Use
- Speed Gear Shift
- Electronic Gear Shift
- Mechanical Gear Shift
- 4-speed Adjustment
- Auto-stop Carbon Brush
- LED Light
- Digital Display
- Constant Speed
- Angle Adjustment
- Electrical Mode
- Mute
- Green Laser
- Automatic Oiling
- Electronic Control
- Reverse Rotation Stop
- Froward Rotation Stop
- Hydraulic System
- Waterproof and Dustproof
- Wi-Fi
- Type-C Port
- Infrared Assistant
- Bluetooth
- USB Charging Port
- Voltage Testing
- Quick Disassembly
- Overcurrent Protection
- Over Discharge Protection
- Overcharge Protection
- Double Protection
- Drop Control
- Short-circuit Protection
- Kickback Control
- SDS Plus
- SDS Max
- 65 Chisel
- Hex
- One-Key Lock
- Three Replaceable Blow Vents
- Low Vibration
- Vibration Reduction
- Bevel Cutting
- Battery Indicator
- Eco Mode
- Brake
- Turbo Mode
- Compact Design
- Reversible Blade
- Active Vac
- Electronic Torque Control
- Wide Voltage
- Active Feedback Sensing Technology
- Electrical Speed Breaking Control Technology
- High Air Volume
- Rotatable Handle
- Overload Restart
- Safety Control
- Voice Broadcasting
- Tool-Free Tension
- Low Noise
- Bump Feed
- Fast Winding
- 3-Speed Adjustment
- High Efficiency
- Super Vibration Control Technology

CONTENTS

CONTENTS

CORDLESS TOOLS

DRILLING AND FASTENING

CORDLESS SCREWDRIVER ---- 17-18
CORDLESS BRUSHLESS IMPACT DRIVER ---- 18-21
CORDLESS BRUSHLESS IMPACT WRENCH ---- 22-24
CORDLESS RATCHET WRENCH ---- 24
CORDLESS DRIVER DRILL ---- 27
CORDLESS BRUSHLESS DRIVER DRILL ---- 27-31
CORDLESS BRUSHLESS DRIVER/ HAMMER DRILL ---- 31-37

CONCRETE & MASONRY TOOLS

CORDLESS BRUSHLESS ROTARY HAMMER ---- 37-41

GRINDING & SANDING & POLISHING

CORDLESS BRUSHLESS ANGLE GRINDER ---- 42-44
CORDLESS DIE GRINDER ---- 45

SAWS & CUTTERS

CORDLESS BRUSHLESS CIRCULAR SAW ---- 47-48
CORDLESS SABRE SAW ---- 49
CORDLESS RECIPROCATING SAW ---- 49
CORDLESS BRUSHLESS RECIPROCATING SAW ---- 50
CORDLESS BRUSHLESS JIG SAW ---- 51
CORDLESS BRUSHLESS MARBLE CUTTER ---- 52
CORDLESS BRUSHLESS BAND SAW ---- 52
CORDLESS BRUSHLESS PIPE CUTTER ---- 52
CORDLESS BRUSHLESS METAL SHEAR ---- 53

PLANNING & CUTTING

CORDLESS MULTI-TOOL ---- 53
CORDLESS BRUSHLESS OSCILLATING MULTI-TOOL ---- 53-54
CORDLESS BRUSHLESS PLANER ---- 54
CORDLESS BRUSHLESS TRIMMER ---- 54
CORDLESS HYDRAULIC CABLE CUTTER ---- 55
CORDLESS HYDRAULIC CABLE CRIMPING TOOL ---- 55

MEASURING & LIGHTING

GREEN LASER LEVEL ---- 56-58
LASER DISTANCE METER ---- 59
CORDLESS LED WORK LIGHT ---- 59-63

TILE POSITIONING

CORDLESS TILE VIBRATION LEVELING MACHINE ---- 63-64

CLEANING

CORDLESS BRUSHLESS VACUUM CLEANER ---- 64
CORDLESS BRUSHLESS HIGH-PRESSURE WASHER ---- 64

GARDEN TOOLS

CORDLESS BRUSHLESS PRUNER ---- 65
TELESCOPIC EXTENSION POLE ---- 66
CORDLESS BRUSHLESS PRUNING SAW ---- 66-67
CORDLESS BRUSHLESS CHAIN SAW ---- 67
CORDLESS BRUSHLESS DUST BLOWER ---- 68
CORDLESS BRUSHLESS BLOWER ---- 68-69
CORDLESS BRUSHLESS STRING TRIMMER ---- 69
CORDLESS HEDGE TRIMMER ---- 70
CORDLESS GRASS SHEAR & SHRUB TRIMMER ---- 70

OTHERS

CORDLESS BRUSHLESS MIXER ---- 70
CORDLESS PPR FUSION WELDER ---- 71
CORDLESS FAN ---- 71
CORDLESS BLIND RIVETING GUN ---- 71
CORDLESS CAULK GUN ---- 72
CORDLESS BRUSHLESS WIRE MACHINE ---- 72
CORDLESS GREASE GUN ---- 72
CORDLESS BRUSHLESS GREASE GUN ---- 73
CORDLESS SUCTION CUP ---- 73
CORDLESS AIR PUMP ---- 73-74
CORDLESS BRUSHLESS AIR PUMP ---- 74
CORDLESS BRUSHLESS CONCRETE NAILER ---- 74
CORDLESS BRUSHLESS COMBO KIT ---- 75-82

CORDED TOOLS

DRILLING AND FASTENING

IMPACT SCREWDRIVER ---- 84
ELECTRIC WRENCH ---- 84
SHEAR WRENCH ---- 84
ELECTRIC DRILL ---- 85-86
ELECTRIC IMPACT DRILL ---- 87-88
DIAMOND DRILL WITH WATER SOURCE ---- 88-89
MAGNETIC DRILL ---- 90

CONCRETE & MASONRY TOOLS

HAMMER DRILL ---- 95
ELECTRIC ROTARY HAMMER ---- 95-101
PERCUSSION HAMMER ---- 103-106

GRINDING & SANDING & POLISHING

ANGLE GRINDER ---- 109-116
POLISHER ---- 116-117
GRINDING POLISHER ---- 117
DIE GRINDER ---- 117-118
RANDOM ORBIT SANDER ---- 118
ORBITAL SANDER ---- 119
BELT SANDER ---- 119
DRYWALL SANDER ---- 120
STRAIGHT GRINDER ---- 120

SAWS & CUTTERS

ELECTRIC CIRCULAR SAW ---- 121-122
RECIPROCATING SAW ---- 122-123
JIG SAW ---- 123
MARBLE CUTTER ---- 123-125
GROOVE CUTTER ---- 126
BRUSHLESS GROOVE CUTTER ---- 126
BRUSHLESS RING SAW ---- 126
ELECTRIC MITRE SAW ---- 127
SLIDE COMPOUND MITRE SAW ---- 127
ELECTRIC CUT-OFF MACHINE ---- 128-129
TABLE SAW ---- 130

PLANNING & CUTTING

MULTI-TOOL ---- 130
ELECTRIC PLANER ---- 130
TRIMMER ---- 130-131
WOOD ROUTER ---- 131

CLEANING

HIGH-PRESSURE WASHER ---- 132
VACUUM CLEANER ---- 133

GARDEN TOOLS

BLOWER VACUUM ---- 133-134
ELECTRIC CHAIN SAW ---- 134
ELECTRIC LAWN MOWER ---- 134

OTHERS

ELECTRIC MIXER ---- 134
HEAT GUN ---- 135
CONCRETE VIBRATOR ---- 135
HIGH-PRESSURE SPRAYING UNIT ---- 136

OTHER TOOLS

PNEUMATIC

AIR BRAD NAILER ---- 136
AIR STAPLER ---- 136-137
AIR PIN NAILER ---- 137
AIR CONCRETE NAILER ---- 137
AIR COIL NAILER ---- 137
OIL- FREE AIR COMPRESSOR ---- 139-141
DIRECT DRIVE AIR COMPRESSOR ---- 142
BELT AIR COMPRESSOR ---- 142-143
AIR IMPACT WRENCH ---- 143
SPRAY GUN ---- 144

WELDING MACHINES

INTELLIGENT ARC WELDING MACHINE ---- 146-148
DC MIG WELDING MACHINE ---- 149-153
DC TIG WELDING MACHINE ---- 154

PUMP

GASOLINE WATER PUMP ---- 155
PERIPHERAL PUMP ---- 155
INTELLIGENT SELF-PRIMING BOOSTER PUMP ---- 155-156
SELF-PRIMING JET PUMP ---- 157
SUBMERSIBLE PUMP ---- 157
SEWAGE PUMP ---- 158
PM VFD SELF-PRIMING BOOSTER PUMP ---- 158
CANNED PUMP ---- 158

GASOLINE GARDEN TOOLS

PETROL CHAIN SAW ---- 158-159
PETROL BLOWER ---- 159
PETROL BRUSH CUTTER ---- 159

GASOLINE(OTHERS)

GASOLINE GENERATOR ---- 161-164
OPEN FRAME INVERTER GASOLINE GENERATOR ---- 165-167
DIESEL GENERATOR ---- 168
SILENT DIESEL GENERATOR ---- 168


DCA

ONE SYSTEM OVER

*Specifications may differ from country to country.

20V MAX Lithium-Ion

DCA

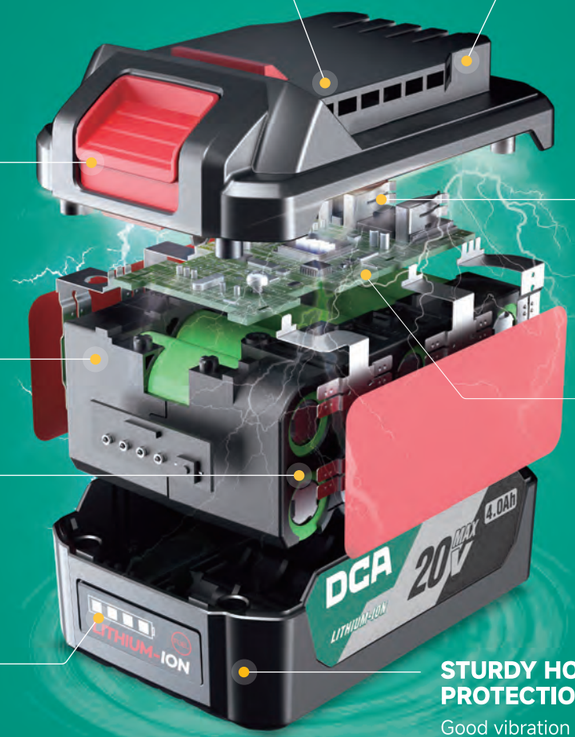

BATTERY SLIDE
Firmly connect batteries and tools for high intensity work

LOCK WITH ONE FINGER

UNIT CELL

NICKEL PLATE

BATTERY INDICATOR

REINFORCED PROTECTIVE WALL
Effectively extend the service life of the terminal

PROTECTIVE BARRIER
Effectively prevent dust from entering the battery pack

SEALING SILICONE
Effectively protect the chip from dust or metal damage

STURDY HOUSING AND BATTERY PROTECTION BRACKET
Good vibration resistance, can effectively alleviate the damage of external shock to the battery

OVERLOAD PROTECTION

OVERCHARGE PROTECTION

OVER-DISCHARGE PROTECTION



- *Single cell charging protection*
- *Single cell discharging protection*
- *Battery pack with temperature on-board detection is more accurate than detected by external tools*

DCA

20V MAX Lithium-Ion

ADLB20142
ADEP100
ADWL2001
ADWL20/20B
ADLB20093
ADST20141
ADQF20V-32
ADMD20
ADYD02-35
ADHT20222
ADCS20084-2
ADPR20352
ADCS20101
ADCS20062-2
ADMP6
ADCS20121
ADJF02-28
ADMB82
ADGS20083
ADJF32
ADPV2050
ADJF20V-22
ADJJ1.6
ADZE125
ADMY165S
ADMY140S
ADYH05-400
ADJJ2.5
ADYH05-300
ADJT201140
ADMY02-185
ADMY125
ADYJ05-120
ADMQ2065
ADMQ85
ADMY02-155

ADCP20130B
ADCP20190
ADZC03-28
ADSM06-100/115/125
ADSM20V-02100/115/125
ADZC05-26L
ADZC05-26
ADZC22
ADZC04-24
ADZC02-26
ADJZ2035i13
ADJZ2055i
ADJZ2060i
ADJZ2090i
ADJZ20V-120i
ADJZ20160i
ADJZ2035
ADJZ2055
ADJZ2060
ADJZ2090
ADJZ20V-120
ADJZ20V-122
ADJZ20160
ADPL20V-158
ADPL20V-206
ADPB320
ADPB318
ADPB520
ADPB688
ADPB1268
ADGG20600
ADGG500
ADCN100
ADQR32
ADFS240/240B
ADCX600
ADQE20145
ADQW2035
ADVC800
ADQU160

*Specifications may differ from country to country.



*Specifications may differ from country to country.

RECOMMENDED BATTERIES FOR 20VMAX SERIES TOOLS

MODEL	2.0Ah FFBL2020	2.5Ah FFBL2025	4.0Ah FFBL2040	5.0Ah FFBL2050	6.0Ah FFBL2060	7.5Ah FFBL2075	8.0Ah FFBL2080
ADPL20V-158	★★	★★	★★★	★★	★★	★	★
ADPL20V-206	★★	★★	★★★	★★	★★	★	★
ADPB320	★★	★★	★★★	★★★	★★★	★★	★★
ADPB318	★★	★★	★★★	★★★	★★★	★★	★★
ADPB520	×	×	★★★	★★★	★★★	★★	★★
ADPB688	×	×	★★★	★★★	★★★	★★	★★
ADPB1268	×	×	★	★★★	★★★	★★	★★
ADJZ2035	★★★	★★★	★★★	★★★	★★★	★★	★★
ADJZ2055	★★★	★★★	★★★	★★★	★★★	★★	★★
ADJZ2060	★★★	★★★	★★★	★★★	★★★	★★	★★
ADJZ2090	★	★	★★★	★★★	★★★	★★	★★
ADJZ20V-120	★★	★★	★★★	★★★	★★	★	★
ADJZ20V-122	★★	★★	★★★	★★★	★★	★	★
ADJZ20160	★	★	★★★	★★★	★★	★	★
ADJZ2035i13	★★★	★★★	★★★	★★★	★★★	★★	★★
ADJZ2055i	★★★	★★★	★★★	★★★	★★★	★★	★★
ADJZ2060i	★★★	★★★	★★★	★★★	★★★	★★	★★
ADJZ2090i	★	★	★★★	★★★	★★★	★★	★★
ADJZ20V-120i	★★	★★	★★★	★★★	★★	★	★
ADJZ20160i	★	★	★★★	★★★	★★★	★	★
ADZC22	×	×	★★★	★★★	★★★	★★	★★
ADZC04-24	×	×	★★★	★★★	★★★	★★	★★
ADZC02-26	★	★	★★★	★★★	★★★	★★	★★
ADZC05-26	★	★	★★★	★★★	★★★	★★	★★
ADZC05-26L	★	★	★★★	★★★	★★★	★★	★★
ADZC20V-0228	★	★	★★	★★★	★★★	★★★	★★★
ADZC03-28	★	★	★★	★★★	★★★	★★★	★★★
ADSM06-100	×	×	★★★	★★★	★★★	★★★	★★★
ADSM06-115	×	×	★★★	★★★	★★★	★★★	★★★
ADSM06-125	×	×	★★★	★★★	★★★	★★★	★★★
ADSM20V-02100	★	★	★★★	★★★	★★★	★★★	★★★
ADSM20V-02115	★	★	★★★	★★★	★★★	★★★	★★★
ADSM20V-02125	★	★	★★★	★★★	★★★	★★★	★★★
ADMY125	×	×	★★★	★★★	★★★	★★★	★★
ADMY140S	×	×	★★★	★★★	★★★	★★★	★★
ADMY02-155	×	×	★★★	★★★	★★★	★★★	★★
ADMY165S	×	×	★★★	★★★	★★★	★★★	★★
ADMY02-185	×	×	★★★	★★★	★★★	★★★	★★
ADJF20V-22	★	★	★★★	★★★	★★★	★★	★★
ADJF02-28	★	★	★★★	★★★	★★★	★★	★★
ADJF32	★	★	★★★	★★★	★★★	★★	★★
ADMQ2065	★	★	★★★	★★★	★★★	★★	★★
ADMQ85	★	★	★★★	★★★	★★★	★★	★★
ADZE125	×	×	★★★	★★★	★★★	★★★	★★
ADJT201140	×	×	★★★	★★★	★★★	★★	★★
ADPV2050	×	×	★★★	★★★	★★★	★★	★★
ADJJ1.6	★★★	★★★	★★★	★★★	★★	★★	★★
ADJJ2.5	★	★	★★	★★	★★★	★★★	★★★
ADMD20	×	×	★★★	★★★	★★★	★★	★★
ADMB82	×	×	★★★	★★★	★★★	★★★	★★
ADMP6	★	★	★★★	★★★	★★★	★★	★★
ADYJ05-120	★★	★★	★★★	★★★	★★★	★★	★★
ADYH05-300	★★	★★	★★★	★★★	★★★	★★	★★
ADYH05-400	★★	★★	★★★	★★★	★★★	★★	★★
ADCP20130B	★★	★★	★★★	★★★	★★★	★★	★★
ADCP20190	★★	★★	★★★	★★★	★★★	★★	★★
ADWL2001	★★★	★★★	★★★	★★	×	×	×
ADWL20	★★	★★	★★★	★★★	★★★	★★★	★★★
ADWL20B	★★	★★	★★★	★★★	★★★	★★★	★★★
ADVC800	★	★	★★★	★★★	×	×	×
ADQW2035	★★	★★	★★★	★★★	★★★	★	★
ADYD02-35	★★★	★★★	★★	★★	×	×	×
ADPR20352	★★★	★★★	★★	★★	×	×	×
ADCS20062-2	★★	★★	★★★	★★★	★★	×	×
ADCS20084-2	★★	★★	★★★	★★★	★★	×	×
ADCS20101	★	★	★★★	★★★	★★★	★★	★★
ADCS20121	★	★	★★★	★★★	★★★	★★	★★
ADQF20V-32	★	★	★★★	★★★	★★★	★★	★★
ADLB20093	★	★	★★★	★★★	★★★	★★	★★
ADLB20142	★	★	★★★	★★★	★★★	★★	★★
ADST20141	★	★	★★★	★★★	★★★	★★	★★
ADHT20222	★★★	★★★	★★★	★★★	★	★	★
ADGS20083	★★★	★★★	★★★	★★★	★	★	★
ADQU160	×	×	★★★	★★★	★★★	★★★	★★★
ADQR32	★	★	★★★	★★★	★★★	★★★	★★★
ADFS240	★★	★★	★★★	★★★	★★★	★★★	★★★
ADCX600	×	×	★★★	★★★	★★★	★★	★★
ADGG500	★★★	★★★	★★★	★★★	★★★	★★	★★
ADGG20600	★★★	★★★	★★★	★★★	★★★	★★	★★
ADQE20145	★★	★★	★★★	★★★	★★★	★★	★★
ADCN100	★★	★★	★★★	★★★	★★★	★★	★★

**★★★SUPERIOR PERFORMANCE ★★GOOD PERFORMANCE ★NO LOAD OPERATION ONLY ×NOT RECOMENDED

DCA

12V MAX Lithium-Ion



PURCHASE GUIDE

01 Select the model you need

12V MAX



ADJZ12V-40 (TYPE DM/ EM)



ADJZ12V-40
(TYPE DM/ EM)



ADJF03-15
(TYPE B/Z)

02 Select the battery you need



LB1220-4

03 Select the charger you need



FFCL12-9

01 Select the model you need

12V MAX



ADJZ12V-40 (TYPE C/ C2)



ADJZ12V-40
(TYPE C/ C2)

02 Select the battery you need



TYPE-C

LB1220-5

03 Select the charger you need



FFCL0502
(Sold separately)

*Specifications may differ from country to country.

LI-ION BATTERY&CHARGING TIME REFERENCE ,COMPATIBILITY CHART

VOLTAGE	PICTURE	BATTERY MODEL	BATTERY CAPACITY	CHARGER			
				FFCL20-02(2A) 	FFCL20-04(4A) Fast Charging 	FFCL2040-2(DUAL 4A) Fast Charging 	FFCL2080-02(8A) Fast Charging 
20V MAX		FFBL2020	2.0Ah	**≈60min**	**≈35min**	**≈35min**	**≈35min**
		FFBL2025	2.5Ah	**≈75min**	**≈45min**	**≈45min**	**≈45min**
		FFBL2040	4.0Ah	**≈120min**	**≈65min**	**≈65min**	**≈40min**
		FFBL2050	5.0Ah	**≈150min**	**≈80min**	**≈80min**	**≈50min**
		FFBL2060	6.0Ah	**≈180min**	**≈95min**	**≈95min**	**≈60min**
		FFBL2075	7.5Ah	**≈225min**	**≈115min**	**≈115min**	**≈75min**
		FFBL2080	8.0Ah	**≈240min**	**≈125min**	**≈125min**	**≈80min**

VOLTAGE	PICTURE	BATTERY MODEL	BATTERY CAPACITY	CHARGER		
				FFCL12-4(3A) 	FFCL12-9(1.3A) 	FFCL0502(2A) 
12V MAX		LB1220-1	2.0Ah	**≈40min**	-	-
		LB1220-4	2.0Ah	-	**≈90min**	-
	 TYPE-C	LB1220-5	2.0Ah	-	**≈90min**	**≈165min**

*Specifications may differ from country to country.

EC BRUSHLESS DC MOTOR



HIGH EFFICIENCY

Delivering more power and torque for excellent application performance.

HIGH DURABILITY

Maintenance-free and long lifetime.

SUITABLE FOR LONG-TERM USE

Less heat generation and less energy loss, extended battery life.

BRUSHLESS OUTER ROTOR MOTOR



HIGH POWER DENSITY

Providing higher output power and torque compared with the same size normal brushless motor.

PRECISE CONTROL

More precise speed and torque control.


ADPL20V-206


ADQF20V-32


ADLB20142


ADHT20222


ADST20141


ADCS20062-2


ADCS20101

*Specifications may differ from country to country.

DVR VIBRATION REDUCTION TECHNOLOGY




The outstanding suspension structure is armed with vibration-reduction and isolation modules.


ADVANTAGES:

Work more comfortably and slow down your physical fatigue during operation.



SUPER VIBRATION CONTROL TECHNOLOGY

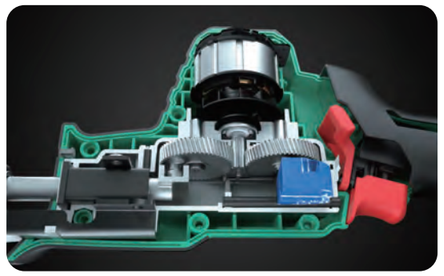



SVC (Super Vibration Control Technology), which can effectively reduce the fatigue of the operator, and is currently one of the best vibration control technologies in the industry.


DOUBLE GEARS DRIVE THE BALANCING BLOCK

No-load vibration of only 4.1m/s², 66% less vibration than last generation.

HIGH EFFICIENCY TECHNOLOGY



- **4.44:1** Golden Hammering Ratio.
- Fast drilling speeds and strong impact energy increase the working efficiency.

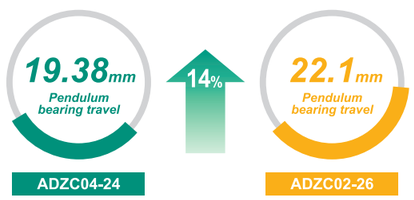

Pendulum bearing travel **22.1**mm, **14%** higher



*Specifications may differ from country to country.

SAFETY CONTROL TECHNOLOGY

ELECTRONIC SPRAIN PREVENTION

It will automatically stop when the sensor detects an angular acceleration of more than **15°**.



RESPONSIVE

Advanced six-axis sensor with **10** millisecond class transmission.



MECHANICAL CLUTCH

Utilizing the steel ball as the torque transmission component, according to the relative position of the steel ball in the arc-shaped groove, through the slotted butterfly spring to accurately control the torque limit value, when the torque exceeds a certain limit value, it can quickly and accurately play a role in the protection (separation), with high precision and reliable work.




DCA

DC TOOLS



*Specifications may differ from country to country.

LIST OF IMPACT DRIVERS SPECIFICATIONS



MODEL	PRODUCT PICTURE	NO-LOAD SPEED	VOLTAGE	MAX. FASTENING TORQUE	LENGTH (mm)	NET WEIGHT	LED WORKING LIGHTS NUMBER	SPEED MODE SETTING	BRUSHLESS INTERNAL ROTOR MOTOR	BRUSHLESS EXTERNAL ROTOR MOTOR
ADPL04-8		0-1200/ 0-3300	12V MAX	140	125	0.7-0.9	1	2-speed+ self-tapping mode	●	
ADPL12-180		0-1800/ 0-3600	12V MAX	180	100	0.7-0.9	1 (LED Ring work light)	2-speed+ thin steel mold+ self-tapping mode	●	
ADPL20V-158		0-1200/ 0-2100/ 0-3300	20V MAX	158	125	0.8-1.4	1	3-speed+ self-tapping mode	●	
ADPL20V-206		0-1000/ 0-2600/ 0-3200	20V MAX	206	107	1.0-1.6	3	3-speed+ self-tapping mode		●


*self-tapping mode: Offering Soft START and perfect ACCELERATION to help you drive screws with precise positioning

ADPL08-5(TYPE E) CORDLESS SCREWDRIVER 4V

New COMING SOON



Battery	4V/2.0Ah
Max. Power Output	36W
Clamping Capacity	6.35mm Hex
Max. Screw Dia.	5mm
Max. Torque	5N·m
No-load Speed	320/min
Torque Setting	7+1
Net Weight	0.32kg

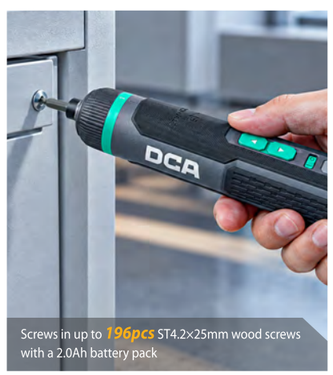

Features

- 5N.m max. torque output;
- 7+1 torque settings, for a variety of applications;
- Single Handed Bit Insertion, for ease of use;
- Multi-Scene Ready, 30-in-1 bit set.

Accessories & Package

- Type-C Cable • Driver Bits Set • Plastic Case Packing

ADPL05-5(TYPE D/B) CORDLESS SCREWDRIVER 4V



DUAL-LED WORKING LIGHT DESIGN
Breaking the dark limit



Adapters Sold Separately







3-SPEED&TORQUE ADJUSTMENT
For a variety of applications

RUBBERIZED HANDLE
Comfortable to hold

TYPE-C UNIVERSAL CHARGING INTERFACE

- 7-Color Optional



Batttery	4V/2.0Ah/4V/2.0Ah
Max. Power Output	36W
Clamping Capacity	6.35mm Hex
Max. Screw Dia.	5mm
Max. Torque	5N·m
No-load Speed	215±10%/min
Torque Setting	3
Net Weight	0.38/0.38kg

Accessories & Package

- Type-C Cable • Driver Bits Set • Tool Carrying Bag (Only TYPE D) • Carton Packing



ADPL04-8(TYPE EK/Z) CORDLESS BRUSHLESS IMPACT DRIVER 12MAX V



- (Type EK) 2.0Ahx2, 3A Charger
  (Type Z) Solo, Carton Packing

Batttery		12V MAX/2.0Ahx2/Solo
Max. Power Output		250W
Standard Bolt Size		M5-M14
Clamping Capacity		6.35mm Hex
No-load Speed	L gear	0-1200/min
	H gear	0-3300/min
Impact Frequency	L gear	0-1600/min
	H gear	0-4000/min
Max. Fastening Torque		140N·m
Net Weight		0.9/0.7kg



Features

- Brushless motor,delivering up to 140N.m of torque;
- 125mm compact body,perfect control in narrow space;
- Self-Tapping Mode,soft start for accurate positioning.

Accessories & Package

- Driver Bit • Belt Clip • Plastic Case Packing (Except Type Z)

ADPL12-180(TYPE EK/Z) CORDLESS BRUSHLESS IMPACT DRIVER 12MAX V



SINGLE HANDED BIT INSERTION
For ease of use


RING SHADOWLESS LED WORKING LIGHT
Breaking the dark limit

BRUSHLESS MOTOR
Delivering up to 180N·m of torque

100mm ULTRA COMPACT BODY
Perfect control in narrow space

● (Type EK) 2.0Ahx2, 3A Charger (Type Z) Solo, Carton Packing

Batttery	12V MAX/2.0Ahx2/Solo
Max. Power Output	450W
Standard Bolt Size	M5-M14
Clamping Capacity	6.35mm Hex
No-load Speed	0-3600/min
Impact Frequency	0-4200/min
Max. Fastening Torque	180N·m
Net Weight	0.9/0.7kg

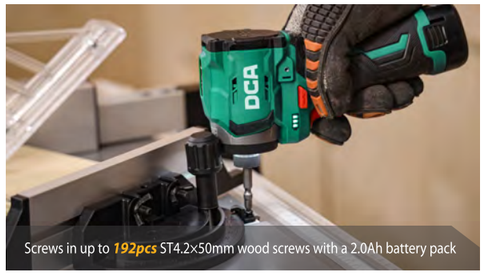

Screws in up to ***192pcs*** ST4.2×50mm wood screws with a 2.0Ah battery pack

Accessories & Package

・Driver Bit・Belt Clip・Plastic Case Packing (Except Type Z)

ADPL20V-158(TYPE EM/AM/Z) CORDLESS BRUSHLESS IMPACT DRIVER 20MAX V

NEW



Battery		20V MAX/4.0Ah×2/2.0Ah×2/Solo
Max. Power Output		450W
Clamping Capacity		6.35mm Hex
Standard Bolt Size		M5-M16
No-load Speed	L gear	0-1200/min
	M gear	0-2100/min
	H gear	0-3300/min
Impact Frequency	L gear	0-1300/min
	M gear	0-3500/min
	H gear	0-4300/min
Max. Fastening Torque		158N·m
Net Weight		1.4/1.1/0.8kg

● (Type EM) 4.0Ahx2, 2A Charger (Type AM) 2.0Ahx2, 2A Charger
(Type Z) Solo, Carton Packing



Screws in up to ***225pcs*** ST6.0×50mm wood screws with a 2.0Ah battery pack

Features

・Brushless motor, delivering up to 158N.m of torque;
・125mm compact body, perfect control in narrow space;
・Self-Tapping Mode, soft start for accurate positioning;
・3-speed control, applicable to different working conditions.

Accessories & Package

・Driver Bit・Belt Clip・Plastic Case Packing (Except Type Z)

*Specifications may differ from country to country.

HIGH TORQUE WITH COMPACT BODY

BRUSHLESS OUTER ROTOR MOTOR
Delivering up to 206N.m of torque

107mm ULTRA COMPACT BODY
Perfect control in narrow space

SELF-TAPPING MODE
Soft start for accurate positioning

TRIANGLE SHADOWLESS LIGHT
Easy to work in the dark



ADPL20V-206

CORDLESS BRUSHLESS IMPACT DRIVER

TYPE(EM/ADM/Z)

20MAX V Lithium-Ion
EC BRUSHLESS

ADPL20V-206(TYPE EM/ADM/AM/Z) CORDLESS BRUSHLESS IMPACT DRIVER 20MAX V


EC BRUSHLESS

NEW



Battery		20V MAX/4.0Ah×2/2.0Ah×1/2.0Ah×2/Solo
Max. Power Output		600W
Clamping Capacity		6.35mm Hex
Standard Bolt Size		M5-M16
Torque Setting	L gear	28N·m
	M gear	170N·m
	H gear	206N·m
No-load Speed	L gear	0-1000/min
	M gear	0-2600/min
	H gear	0-3200/min
Impact Frequency	L gear	0-700/min
	M gear	0-3600/min
	H gear	0-4300/min
Net Weight		1.6/1.3/1.3/1.0kg

● (Type EM) 4.0Ahx2, 2A Charger
(Type ADM) 2,0Ahx1, 2A Charger (Type AM) 2,0Ahx2, 2A Charger (Type Z) Solo, Carton Packing

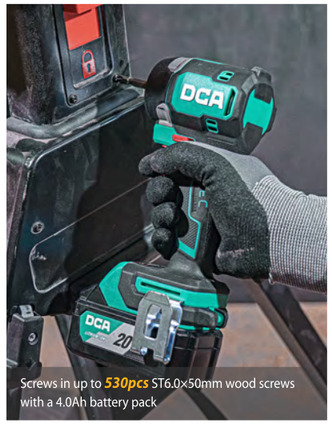

Features

- Brushless outer rotor motor, delivering up to 206N.m of torque;
- 107mm ultra compact body, perfect control in narrow space;
- Self-Tapping Mode, soft start for accurate positioning;
- 3-speed control, applicable to different working conditions.

Accessories & Package


- Driver Bit - Belt Clip - Plastic Case Packing (Except Type Z)



RECOMMENDED ACCESSORIES


Suitable for Driver Drill & Drill

Head	Specification	Product Code	PCS/CTN
Double	PH2×65	30270900001	1000
Single	PH1×25	30270900005	2000
Single	PH2×50	30270900009	1000
Single	H4×50	30270900011	1000
Double	PH2×65	30270900017	1200

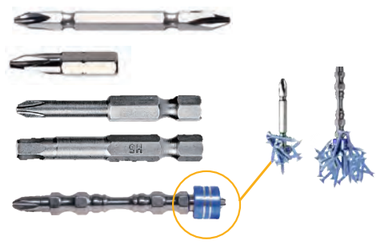

*Specifications may differ from country to country.

LIST OF IMPACT WRENCH SPECIFICATIONS



MODEL	PRODUCT PICTURE	NO-LOAD SPEED(/min)	SQUARE DRIVE	VOLTAGE	MAX. FASTENING TORQUE(N.m)	NUT-BUSTING TORQUE(N.m)	NET WEIGHT(kg)	BL MOTOR	STANDARD BOLT SPECIFICATIONS
ADPB320		0-2200/ 0-2000	1/2″ (12.7mm)	20V MAX	320	420	1.1-1.7	●	M12-M18
ADPB318		0-3100/ 0-2600/ 0-2000	1/2″ (12.7mm)	20V MAX	318	400	1.1-1.7	●	M12-M18
ADPB520		0-2400/ 0-2100/ 0-1800	1/2″ (12.7mm)	20V MAX	520	700	1.4-2.0	●	M12-M20
ADPB688		0-2200/ 0-1900/ 0-1200	1/2″ (12.7mm)	20V MAX	688	910	1.9-2.8	●	M10-M24
ADPB1268		0-1700/ 0-1400/ 0-1200	3/4″ (19.1mm)	20V MAX	1268	1700	3.0-3.9	●	M12-M33

ADPB320(TYPE FK/EDM/EM/Z) CORDLESS BRUSHLESS IMPACT WRENCH 20MAX V

EC BRUSHLESS

139



2-SPEED CONTROL
Meeting different working requirements

ECO MODE
Increasing the running time by 30%

BRUSHLESS MOTOR
Delivering up to 320N.m of fastening torque

SMART-LOOSEN MODE
Preventing nuts from dropping down accidentally

● (Type FK) 5.0Ahx2, 4A Charger (Type EDM) 4.0Ahx1, 2A Charger
(Type EM) 4.0Ahx2, 2A Charger (Type Z) Solo, Carton Packing

Battery		20V MAX/5.0Ah×2/4.0Ah×1/4.0Ah×2/Solo
Max. Power Output		390W
Standard Bolt Size		M12-M18
Square Drive Size		12.7mm(1/2")
No-load Speed	L gear	0-2000/min
	H gear	0-2200/min
Impact Frequency	L gear	0-2600 /min
	H gear	0-3100 /min
Torque Setting		energy saving mode
		Smart-loosen
	L gear	260N·m
	H gear	320N·m
Nut-Busting Torque		420N·m
Net Weight		1.7/1.7/1.7/1.1kg

Accessories & Package

- Socket Assembly(S22) - Belt Clip - Plastic Case Packing (Except Type Z)



ADPB318(TYPE FK/EDM/EM/Z) CORDLESS BRUSHLESS IMPACT WRENCH 20MAX V

EC BRUSHLESS

DUAL-FUNCTION SQUARE DRIVE
Instantly switch between socket & hex bit retention without adapters



SMART LOOSEN MODE
Preventing nuts from dropping down accidentally

BRUSHLESS MOTOR
Delivering up to 318N.m of fastening torque

140 mm

140mm COMPACT BODY
Perfect control in narrow space

4-MODE SPEED CONTROL
Meeting different working requirements

● (Type FK) 5.0Ahx2, 4A Charger (Type EDM) 4.0Ahx1, 2A Charger
(Type EM) 4.0Ahx2, 2A Charger (Type Z) Solo, Carton Packing

Battery		20V MAX/5.0Ah×2/4.0Ah×1/4.0Ah×2/Solo
Max. Power Output		420W
Standard Bolt Size		M12-M18
Square Drive Size		12.7mm(1/2")
No-load Speed	L gear	0-2000/min
	H gear	0-2600/min
	Screw gear	0-3100/min
Impact Frequency	L gear	0-2600/min
	H gear	0-3100/min
	Screw gear	0-3800/min
Torque Setting	L gear	230N·m
	H gear	290N·m
	Screw gear	318N·m
Nut-Busting Torque		400N·m
Net Weight		1.7/1.7/1.7/1.1kg

Accessories & Package

• Driver Bit • Soecket Assembly (S22) • Belt Clip • Plastic Case Packing (Except Type Z)



ADPB520(TYPE FK/EM/Z) CORDLESS BRUSHLESS IMPACT WRENCH 20MAX V

EC BRUSHLESS

NEW 152



Battery		20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output		450W
Square Drive Size		12.7mm(1/2")
No-load Speed	L gear	0-1800/min
	M gear	0-2100/min
	H gear	0-2400/min
Impact Frequency	L gear	0-2600/min
	M gear	0-3000/min
	H gear	0-3500/min
Torque Setting	L gear	350N·m
	M gear	420N·m
	H gear	520N·m
Nut-Busting Torque		700N·m
Standard Bolt Size		M12-M20
Net Weight		2.0/2.0/1.35kg

● (Type FK) 5.0Ahx2, 4A Charger
(Type EM) 4.0Ahx2, 2A Charge (Type Z) Solo, Carton Packing

Features

• Brushless motor, delivering up to 520N.m fastening torque;
• 152mm compact body, perfect control in narrow space;
• Smart loosen&tighten mode, preventing nuts from accidentally falling off/over–tightening;
• 3–speed control, meeting different working requirements.

Accessories & Package

• Socket Assembly (S22) • Belt clip • Plastic Case Packing (Except Type Z)



*Specifications may differ from country to country.

ADPB688(TYPE H2K/FK/Z) CORDLESS BRUSHLESS IMPACT WRENCH 20MAX V

EC BRUSHLESS

NEW



Battery		20V MAX/6.0Ah×2/5.0Ah×2/Solo
Max. Power Output		750W
Square Drive Size		12.7mm(1/2")
No-load Speed	L gear	0-1200/min
	M gear	0-1900/min
	H gear	0-2200/min
Impact Frequency	L gear	0-1700/min
	M gear	0-2400/min
	H gear	0-2700/min
Torque Setting	L gear	400N·m
	M gear	550N·m
	H gear	688N·m
Standard Bolt Size		M10-M24
Nut-Busting Torque		910N·m
Net Weight		2.8/2.5/1.9kg

● (Type H2K) 6.0Ahx2, 4A Charger (Battery packs sold separately)
(Type FK) 5.0Ahx2, 4A Charger (Type Z) Solo, Carton Packing

Features

• Brushless motor, delivering up to 688N.m fastening torque;
• 3–speed control, applicable to different working conditions;
• Efficient heat dissipation air vents, effectively extending the lifetime of product.

Accessories & Package

• Plastic Case Packing (Except Type Z)



ADPB1268(TYPE H2K/FK/Z) CORDLESS BRUSHLESS IMPACT WRENCH 20MAX V

EC BRUSHLESS DVR

New COMING SOON



Battery		20V MAX/6.0Ah×2/5.0Ah×2/Solo
Max. Power Output		800W
Square Drive Size		19.1mm(3/4")
No-load Speed	L gear	0-1200/min
	M gear	0-1400/min
	H gear	0-1700/min
Impact Frequency	L gear	0-1800/min
	M gear	0-2000/min
	H gear	0-2300/min
Torque Setting	L gear	0-600N·m
	M gear	0-900N·m
	H gear	0-1268N·m
Standard Bolt Size		M12-M33
Nut-Busting Torque		1700N·m
Net Weight		3.9/3.6/3.0kg

● (Type H2K) 6,0Ahx2, 4A Charger (Battery packs sold separately)
(Type FK) 5.0Ahx2, 4A Charger (Type Z) Solo, Carton Packing

Features

• Brushless motor delivering up to 1268N.m fastening torque and 1700N.m nut–busting torque;
• 3–speed control, applicable to various working conditions;
• DVR: vibration reduction technology,improving operation comfort;
• Smart loosen&tighten mode, preventing nuts from accidentally falling off / over–tightening.

Accessories & Package

• Plastic Case Packing (Except Type Z)



ADPB02-10(TYPE EK/Z) CORDLESS RATCHET WRENCH 12MAX V



Battery	12V MAX/2.0Ah×2/Solo
Max. Power Output	180W
No-load Speed	0-500/min
Max. Torque	45N·m
Standard Bolt	M5-M12
Square Drive Size	9.5mm(3/8")
Net Weight	0.9/0.7kg

● (Type EK) 2.0Ahx2, 3A Charger
(Type Z) Solo, Carton Packing

Features


• 45N.m high torque output;
• 31mm head height;
• Manual and electric dual operation.

Accessories & Package

• Plastic Case Packing (Except Type Z)



LIST OF CORDLESS DRIVER/HAMMER DRILL SPECIFICATIONS



PRODUCT MODEL			MAX. POWER OUTPUT	MAX. TORQUE	MAIN FUNCTION			MAIN FUNCTION						TORQUE SETTING	SCENARIOS OF USE
12V MAX	12V MAX	20V MAX			F/R CHANGE	OVERCURRENT PROTECTION		VARIABLE SPEED	MECHANICAL GEAR SHIFT	METAL KEYLESS CHUCK	2-SPEED ADJUSTMENT	BL MOTOR	IMPACT FUNCTION		
ADJZ12V-40			200W	40N·m	●	●		●	●		●	●		18+1	home improvement
	ADJZ1250S		280W	50N·m	●	●		●	●		●	●		20+1	home improvement
	ADJZ12V-50		220W	50N·m	●	●		●	●	●	●	●		18+1	home improvement
		ADJZ2035	220W	40N·m	●	●		●	●		●			18+1	home improvement; assemble and install
		ADJZ2055	400W	55N·m	●	●		●	●	●	●	●		18+1	home improvement; assemble and install
		ADJZ2060	500W	60N·m	●	●		●	●	●	●	●		20+1	home improvement; assemble and install
		ADJZ2090	700W	90N·m	●	●		●	●	●	●	●		19+1	home improvement; assemble and install
		ADJZ20V-120	850W	120N·m	●	●		●	●	●	●	●		23+1	home improvement (large torque)
		ADJZ20V-122	850W	122N·m	●	●		●	●	●	●	●		23+1	home improvement (large torque)
		ADJZ20160	1000W	160N·m	●	●		●	●	●	●	●		19+1	home improvement (large torque)
ADJZ12V-40i			200W	40N·m	●	●		●	●		●		●	18+2	home improvement
	ADJZ12V-50i		220W	50N·m	●	●		●	●	●	●	●	●	18+2	home improvement
		ADJZ2035i13	220W	40N·m	●	●		●	●		●		●	18+2	home improvement; assemble and install
		ADJZ2055i	400W	55N·m	●	●		●	●	●	●	●	●	18+2	home improvement; assemble and install
		ADJZ2060i	500W	60N·m	●	●		●	●	●	●	●	●	20+2	home improvement; assemble and install
		ADJZ2090i	700W	90N·m	●	●		●	●	●	●	●	●	19+2	home improvement; assemble and install
		ADJZ20V-120i	850W	120N·m	●	●		●	●	●	●	●	●	23+2	home improvement (large torque)
		ADJZ20160i	1000W	160N·m	●	●		●	●	●	●	●	●	19+2	home improvement (large torque)

*Specifications may differ from country to country.

DRILLING & FASTENING

ADJZ12V-40(TYPE DM/EM/C/C2) CORDLESS DRIVER DRILL 12V MAX



- (Type DM) 2.0Ahx1, 1.3A Charger, Carton Packing
  (Type EM) 2.0Ahx2, 1.3A Charger
- (Type C) 2.0Ahx1(Type-C), Carton Packing
  (Type C2) 2.0Ahx2(Type-C)

Battery	12V MAX/2.0Ah×1/2.0Ah×2/ 2.0Ah×1(Type-C)/2.0Ah×2(Type-C)	
Max. Power Output		200W
Max. Chucking Capacity		10mm
No-load Speed	Low	0-450/min
	High	0-1700/min
Max. Drilling Dia.	Steel	Φ10mm
	Wood	Φ20mm
Torque Setting		18+1
Max. Torque		40N·m
Net Weight		1.0/1.0/1.0/1.0kg



Features

- 40N.m max. torque output;
- 18+1 torque setting, for a variety of applications;
- 10mm (3/8") high-strength keyless chuck;
- 2-speed adjustment, high torque for screw driving, high speed for drilling.

Accessories & Package

- Driver Bit • Plastic Case Packing (Type EM/C2)

ADJZ1250S(TYPE QK/EK/Z) CORDLESS BRUSHLESS DRIVER DRILL 12V MAX

Type QK. Includes the following chucks.

MULTI-FUNCTION HEAD
Meeting different working conditions


2-SPEED ADJUSTMENT
High torque for screw driving, high speed for drilling

21+1 TORQUE SETTING
For a variety of applications

BRUSHLESS MOTOR
Delivering up to 50N.m of torque and 1800/min no-load speed

- (Type QK) 2.0Ah×2, 3A Charger
  (Type EK) 2.0Ah×2, 3A Charge
  (Type Z) Solo, Carton Packing

Battery	12V MAX/2.0Ahx2/2.0Ahx2/Solo	
Max. Power Output		280W
Max. Chucking Capacity		10mm
No-load Speed	1st gear	0-500/min
	2nd gear	0-1800/min
Max. Drilling Dia.	Steel	Φ10mm
	Wood	Φ32mm
Torque Setting		21+1
Max. Torque		50N·m
Net Weight		1.05/1.05/0.85kg

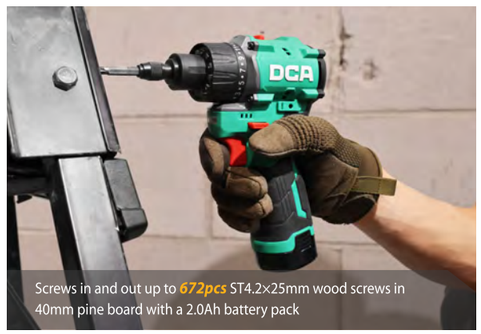

Accessories & Package

- Belt Clip • Driver Bit • Plastic Case Packing (Except Type Z)

*Specifications may differ from country to country.

40N·m HIGH TORQUE DRIVER DRILL EXTREMELY ATTRACTIVE AND COMPETITIVE

40N·m MAX. TORQUE OUTPUT

10mm(3/8") HIGH-STRENGTH KEYLESS CHUCK



18+1 TORQUE SETTING
For a variety of applications

2-SPEED ADJUSTMENT
High torque for screw driving, high speed for drilling

ADJZ12V-40

CORDLESS
DRIVER DRILL

TYPE(DM/EM/C/C2)

12V MAX Lithium-Ion

TYPE-C

ADJZ12V-50(TYPE EK/Z) CORDLESS BRUSHLESS DRIVER DRILL 12MAX V



(Type EK) 2.0Ahx2, 3A Charger
(Type Z) Solo, Carton Packing

Battery		12V MAX/2.0Ah×2/Solo
Max. Power Output		220W
Max. Chucking Capacity		10mm
No-load Speed	Low	0-500/min
	High	0-1800/min
Max. Drilling Dia.	Steel	Φ10mm
	Wood	Φ32mm
Torque Setting		18+1
Max. Torque		50N·m
Net Weight		1.0/0.8kg



Features

- Brushless motor, delivering up to 50N.m of torque and 1800/min no-load speed;
- 139mm compact body, perfect control in narrow space;
- 18+1 torque setting, for a variety of applications;
- 10mm (3/8") Ratchet metal chuck, sturdy and durable.

Accessories & Package


- Driver Bit - Belt Clip - Plastic Case Packing (Except Type Z)

ADJZ2035(TYPE ADM/AM/Z) CORDLESS DRIVER DRILL 20MAX V



(Type ADM) 2.0Ahx1, 2A Charger
(Type AM) 2.0Ahx2, 2A Charger
(Type Z) Solo, Carton Packing

Battery		20V MAX/2.0Ahx1/2.0Ahx2/Solo
Max. Power Output		220W
Max. Chucking Capacity		10mm
No-load Speed	1st gear	0-400/min
	2nd gear	0-1500/min
Max. Drilling Dia.	Steel	Φ10mm
	Wood	Φ20mm
Torque Setting		18+1
Max. Torque		40N·m
Net Weight		1.3/1.3/0.9kg

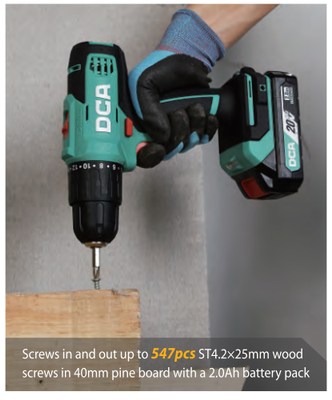

Features

- 40N.m Max. Torque;
- 18+1 torque setting, for a variety of applications;
- 10mm (3/8") high-strength keyless chuck;
- 2-speed adjustment, high torque for screw driving, high speed for drilling.

Accessories & Package

- Belt Clip - Driver Bit - Plastic Case Packing (Except Type Z&Type ADM)

ADJZ2055(TYPE EM/AM/Z) CORDLESS BRUSHLESS DRIVER DRILL 20MAX V



(Type EM) 4.0Ahx2, 2A Charger
(Type AM) 2.0Ahx2, 2A Charger
(Type Z) Solo, Carton Packing

Battery		20V MAX/4.0Ahx2/2.0Ahx2/Solo
Max. Power Output		400W
Max. Chucking Capacity		13mm
No-load Speed	1st gear	0-450/min
	2nd gear	0-1800/min
Max. Drilling Dia.	Steel	Φ13mm
	Wood	Φ35mm
Torque Setting		18+1
Max. Torque		55N·m
Net Weight		1.6/1.3/1.0kg



Features

- Brushless motor,delivering up to 55N.m of torque and 1800/min no-load speed;
- 18+1 torque setting, for a variety of applications;
- 13mm (1/2") metal ratchet chuck, sturdy and durable;
- 2-speed adjustment, high torque for screw driving, high speed for drilling.

Accessories & Package

- Belt Clip - Driver Bit - Plastic Case Packing (Except Type Z)

*Specifications may differ from country to country.

ADJZ2060(TYPE EM/AM/ADM/Z) CORDLESS BRUSHLESS DRIVER DRILL 20MAX V



(Type EM) 4.0Ahx2, 2A Charger (Type AM) 2.0Ahx2, 2A Charger
(Type ADM) 2.0Ahx1, 2A Charger (Type Z) Solo, Carton Packing

Battery		20V MAX/4.0Ah×2/2.0Ah×2/2.0Ah×1/Solo
Max. Power Output		500W
Max. Chucking Capacity		13mm
No-load Speed	1st gear	0-600/min
	2nd gear	0-2300/min
Max. Drilling Dia.	Steel	Φ13mm
	Wood	Φ38mm
Torque Setting		20+1
Max. Torque		60N·m
Net Weight		1.6/1.4/1.4/1.0kg



Features

- Brushless motor, delivering up to 60N.m of torque and 2300/min no-load speed;
- 147mm compact body, perfect control in narrow space;
- 20+1 torque setting, for a variety of application;
- 13mm (1/2") metal ratchet chuck, sturdy and durable.

Accessories & Package


- Belt Clip - Driver Bit - Plastic Case Packing (Except Type Z)

ADJZ2090(TYPE EM/AM/Z) CORDLESS BRUSHLESS DRIVER DRILL 20MAX V



(Type EM) 4.0Ahx2, 2A Charger
(Type AM) 2.0Ahx2, 2A Charger (Type Z) Solo, Carton Packing

Battery		20V MAX/4.0Ah×2/2.0Ah×2/Solo
Max. Power Output		700W
Max. Chucking Capacity		13mm
Max. Screw Dia.		10mm
No-load Speed	1st gear	0-500/min
	2nd gear	0-2200/min
Max. Drilling Dia.	Steel	Φ13mm
	Wood	Φ52mm
Torque Setting		19+1
Max. Torque		90N·m
Net Weight		1.8/1.6/1.2kg

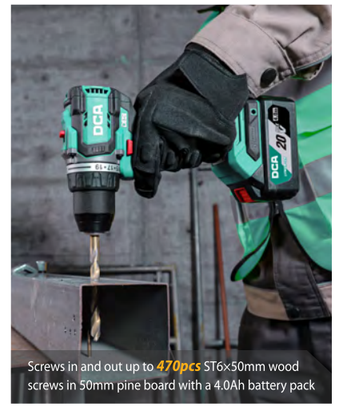

Features

- Brushless motor, delivering up to 90N.m of torque and 2200/min no-load speed;
- 149mm compact body, perfect control in narrow space; - 19+1 torque setting, for a variety of applications;
- 13mm (1/2") metal ratchet chuck, sturdy and durable.
- DSC safety control technology, protecting the machine and user when the drill bit gets stuck.

Accessories & Package

- Belt Clip - Driver Bit - Plastic Case Packing (Except Type Z)

ADJZ20V-120(TYPE FK/EM/Z) CORDLESS BRUSHLESS DRIVER DRILL 20MAX V



(Type FK) 5.0Ahx2, 4A Charger
(Type EM) 4.0Ahx2, 2A Charger (Type Z) Solo, Carton Packing

Battery		20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output		850W
Max. Chucking Capacity		13mm
Max. Screw Dia.		Φ10mm
No-load Speed	1st gear	0-500/min
	2nd gear	0-2000/min
Max. Drilling Dia.	Steel	Φ13mm
	Brick Wall	Φ13mm
	Wood	Φ45mm
Torque Setting		23+1
Max. Torque		120N·m
Net Weight		2.2/2.2/1.6kg



Features

- Brushless motor, delivering up to 120N.m of torque and up to 2000/min no-load speed;
- 23+1 torque setting, for a variety of applications; - 13mm (1/2") ratchet metal chuck, sturdy and durable;
- 2-speed adjustment, high torque for screw driving,high speed for drilling.

Accessories & Package

- Auxiliary Handle - Belt Clip - Driver Bit - Plastic Case Packing (Except Type Z)

ADJZ20V-122(TYPE FK/EM/Z) CORDLESS BRUSHLESS DRIVER DRILL 20MAX V



Battery		20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output		850W
Max. Chucking Capacity		16mm
Max. Screw Dia.		10mm
No-load Speed	1st gear	0-500/min
	2nd gear	0-2000/min
Max. Drilling Dia.	Steel	Φ16mm
	Wood	Φ45mm
Torque Setting		23+1
Max. Torque		122N·m
Net Weight		2.4/2.4/1.8kg

● (Type FK) 5.0Ahx2, 4A Charger
(Type EM) 4.0Ahx2, 2A Charger (Type Z) Solo, Carton Packing



Features

- Brushless motor, delivering up to 122N.m of torque and 2000/min no-load speed;
- 23+1 torque setting, for a variety of applications;
- 13mm (5/8") metal chuck, sturdy and durable;
- 2-speed adjustment, high torque for screw driving, high speed for drilling.

Accessories & Package


- Auxiliary Handle - Belt Clip - Driver Bit - Plastic Case Packing (Except Type Z)

ADJZ20160(TYPE FK/EM/Z) CORDLESS BRUSHLESS DRIVER DRILL 20MAX V



Battery		20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output		1000W
Max. Chucking Capacity		13mm
No-load Speed	1st gear	0-500/min
	2nd gear	0-2100/min
Max. Drilling Dia.	Steel	Φ13mm
	Wood	Φ65mm
Torque Setting		19+1
Max. Torque		160N·m
Net Weight		2.4/2.4/1.8kg

● (Type FK) 5.0Ahx2, 4A Charger
(Type EM) 4.0Ahx2, 2A Charger (Type Z) Solo, Carton Packing

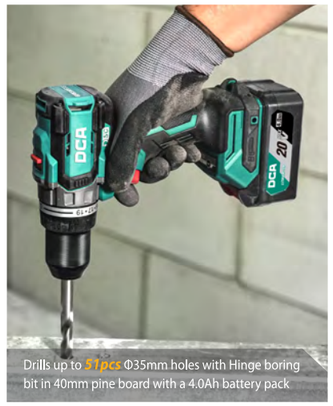

Features

- Brushless motor, delivering up to 160N.m of torque and 2100/min no-load speed;
- 19+1 torque setting, for a variety of applications;
- 13mm (1/2") Ratchet metal chuck, sturdy and durable;
- DSC safety control technology, delivers outstanding safety protection;
- Self-Tapping Mode, soft start for accurate positioning.

Accessories & Package

- Auxiliary Handle - Belt Clip - Driver Bit - Plastic Case Packing (Except Type Z)

ADJZ12V-40i(TYPE DM/EM/C/C2) CORDLESS DRIVER/ HAMMER DRILL 12MAX V



Battery		12V MAX/2.0Ah×1/2.0Ah×2/ 2.0Ah×1(Type-C)/2.0Ah×2(Type-C)
Max. Power Output		200W
Max. Chucking Capacity		10mm
Impact Frequency		0-6750/0-25500/min
No-load Speed	Low	0-450/min
	High	0-1700/min
Max. Drilling Dia.	Steel	Φ10mm
	Brick Wall	Φ8mm
	Wood	Φ20mm
Torque Setting		18+2
Max. Torque		40N·m
Net Weight		1.0/1.0/1.0/1.0kg

● (Type DM) 2.0Ahx1, 1.3A Charger, Carton Packing
(Type EM) 2.0Ahx2, 1.3A Charger
(Type C) 2.0Ahx1(Type-C), Carton Packing
(Type C2) 2.0Ahx2(Type-C)



Features

- 40N.m max. torque output;
- 10mm (3/8") high-strength keyless chuck;
- 18+2 torque setting,for a variety of applications;
- 2-speed adjustment, high torque for screw driving, high speed for drilling.

Accessories & Package

- Driver Bit - Plastic Case Packing (Type EM/C2)

ADJZ12V-50i(TYPE EK/Z) CORDLESS BRUSHLESS DRIVER/ HAMMER DRILL 12MAX V



10mm (3/8") RATCHET METAL CHUCK
Sturdy and durable


18+2 TORQUE SETTING
For a variety of applications

2-SPEED ADJUSTMENT
High torque for screw driving, high speed for drilling

BRUSHLESS MOTOR
Delivering up to 50N.m of torque and 1800/min no-load speed

● (Type EK) 2.0Ah×2, 3A Charge
(Type Z) Solo, Carton Packing

Battery		12V MAX/2.0Ahx2/Solo
Max. Power Output		220W
Max. Chucking Capacity		10mm
Impact Frequency		0-27000/min
No-load Speed	Low	0-500/min
	High	0-1800/min
Max. Drilling Dia.	Steel	Φ10mm
	Wood	Φ32mm
Torque Setting		18+2
Max. Torque		50N·m
Net Weight		1.0/0.8kg

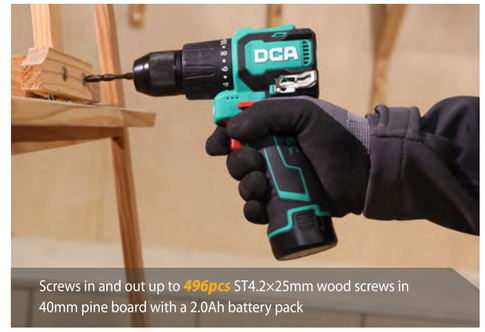

Accessories & Package

- Belt Clip - Driver Bit - Plastic Case Packing (Except Type Z)

ADJZ2035i13(TYPE ADM/AM/Z) CORDLESS DRIVER/ HAMMER DRILL 20MAX V



Battery		20VMAX/2.0Ah×1/2.0Ah×2/Solo
Max. Power Output		220W
Max. Chucking Capacity		13mm
Max. Screw Dia.		7mm
Impact Frequency		0-22500/min
No-load Speed	1st gear	0-400/min
	2nd gear	0-1500/min
Max. Drilling Dia.	Steel	Φ13mm
	Brick Wall	Φ8mm
	Wood	Φ22mm
Torque Setting		18+2
Max. Torque		40N·m
Net Weight		1.4/1.4/1.0kg

● (Type ADM) 2.0Ahx1, 2A Charger
(Type AM) 2.0Ahx2, 2A Charger
(Type Z) Solo, Carton Packing



Features

- 40N.m Max. Torque;
- 13mm (1/2") high-strength keyless chuck;
- 18+2 torque setting, for a variety of applications;
- Rubberized handle, comfortable to hold;
- 2-speed adjustment, high torque for screw driving, high speed for drilling.

Accessories & Package

- Driver Bit - Belt Clip - Plastic Case Packing (Except Type Z)

ADJZ2055i(TYPE EM/AM/Z) CORDLESS BRUSHLESS DRIVER/ HAMMER DRILL 20MAX V



13mm (1/2") RATCHET METAL CHUCK

18+2 TORQUE SETTING
For a variety of applications

2-SPEED ADJUSTMENT
High torque for screw driving, high speed for drilling

BRUSHLESS MOTOR
Delivering up to 55N·m of torque and 1800/min no-load speed

- (Type EM) 4.0Ahx2, 2A Charger
  (Type AM) 2.0Ahx2, 2A Charger
  (Type Z) Solo, Carton Packing

Battery	20V MAX/4.0Ahx2/2.0Ah×2/Solo	
Max. Power Output		400W
Max. Chucking Capacity		13mm
No-load Speed	1st gear	0-450/min
	2nd gear	0-1800/min
Rated Impact frequency		0-27000/min
Max. Drilling Dia.	Steel	Φ13mm
	Brick wall	Φ13mm
	Wood	Φ35mm
Torque Setting		18+2
Max. Torque		55N·m
Net Weight		1.7/1.4/1.1kg



Screws in and out up to **670pcs** ST4.2×25mm wood screws in 40mm pine board with a 2.0Ah battery pack

Accessories & Package

- Belt Clip
- Driver Bit
- Plastic Case Packing (Except Type Z)

ADJZ2060i(TYPE EM/ADM/AM/Z) CORDLESS BRUSHLESS DRIVER/ HAMMER DRILL 20MAX V



Battery	20V MAX/4.0Ah×2/2.0Ah×1/2.0Ah×2/Solo	
Max. Power Output		500W
Max. Chucking Capacity		13mm
Rated Impact Frequency		0-34500/min
No-load Speed	1st gear	0-600/min
	2nd gear	0-2300/min
Max. Drilling Dia.	Steel	Φ13mm
	Brick Wall	Φ13mm
	Wood	Φ38mm
Torque Setting		20+2
Max. Torque		60N·m
Net Weight		1.7/1.5/1.5/1.1kg

- (Type EM) 4.0Ahx2, 2A Charger (Type ADM) 2.0Ahx1, 2A Charger
  (Type AM) 2.0Ahx2, 2A Charger (Type Z) Solo, Carton Packing


Screws in and out up to **186pcs** ST6×50mm wood screws in 40mm pine board with a 2.0Ah battery pack

Features

- Brushless motor, delivering up to 60N.m of torque and 2300/min no-load speed;
- 152mm compact body, perfect control in narrow space;
- 20+2 torque setting, for a variety of applications;
- 13mm (1/2") Ratchet metal chuck, sturdy and durable.

Accessories & Package

- Driver Bit
- Belt Clip
- Plastic Case Packing(Except Type Z)

*Specifications may differ from country to country.

A01A0602 (ADJZ2060i TYPE ADM)-166pcs CORDLESS BRUSHLESS DRIVER/ HAMMER DRILL COMBO KIT



Accessories & Package

- 20V 2.0Ah Battery Pack(1pc)
- 2A Charger
- 0.25kg Fiberglass Handle Claw Hammer
- 3m Dual-Brake Tape Measure
- 6" Long Nose Pliers
- 6" Combination Pliers
- 10" Water Pump Pliers
- 18mm Utility Knife, F-Style Hacksaw
- 5.5" Heavy-Duty Electrician's Scissors
- 5×100mm Slotted Screwdriver
- PH1×100mm Phillips Screwdriver
- Bit Driver Extension Bar
- 1/4" Short Bit Set (3, 4, 5, 6, PH1, PH2, PH3, PZ1, PZ2, PZ3)
- 1/4" Short Bit Set (H3, H4, H5, H6, T10, T15, T20, T25, T30, T40)
- 1/4" 50mm Long Bit Set (4, 5, 6, PH1, PH2, PH3, T10, T15, T20, T30)
- 1/4" Cr-V Power Nut Driver Set (5, 6, 7, 8, 9, 10, 11mm)
- Precision Bit Driver Extension Bar, 4mm Precision Bit Set (1.5, 2, 3, PH000, PH00, PH0, T6, T8, H1.5, H2.5)
- Standard Hex Key Set (1.5, 2, 2.5, 3, 4, 5, 5.5, 6mm)
- 8" Adjustable Wrench
- 1/4" Magnetic Bit Holder
- Voltage Tester
- Fastener Set (40 Self-Tapping Screws: 22×ST3.5, 10×ST4, 8×ST5; 40 Plastic Wall Plugs: 22×5mm, 10×6mm, 8×8mm)
- Drill Bit Set (4 Wood Drill Bits: 4, 5, 6, 8mm; 5 Masonry Drill Bits: 4, 5, 6, 8, 10mm; 5 Twist Drill Bits: 2, 3, 4, 5, 6mm)
- Plastic Case Packing

A01A0603 (ADJZ2060i TYPE ADM)-165pcs CORDLESS BRUSHLESS DRIVER/ HAMMER DRILL COMBO KIT



Accessories & Package

- 20V 2.0Ah Battery Pack(1pc)
- 2A Charger
- 0.25kg Fiberglass Handle Claw Hammer
- 3m Dual-Brake Tape Measure
- 6" Long Nose Pliers
- 6" Combination Pliers
- 18mm Utility Knife
- F-Style Hacksaw
- 5.5" Heavy-Duty Electrician's Scissors
- 5×100mm Slotted Screwdriver
- PH1×100mm Phillips Screwdriver
- Bit Driver Extension Bar
- 1/4" Short Bit Set (3, 4, 5, 6, PH1, PH2, PH3, PZ1, PZ2, PZ3)
- 1/4" Short Bit Set (H3, H4, H5, H6, T10, T15, T20, T25, T30, T40)
- 1/4" 50mm Long Bit Set (4, 5, 6, PH1, PH2, PH3, T10, T15, T20, T30)
- 1/4" Cr-V Power Nut Driver Set (5, 6, 7, 8, 9, 10, 11mm)
- Precision Bit Driver Extension Bar
- 4mm Precision Bit Set (1.5, 2, 3, PH000, PH00, PH0, T6, T8, H1.5, H2.5)
- Standard Hex Key Set (1.5, 2, 2.5, 3, 4, 5, 5.5, 6mm)
- 8" Adjustable Wrench with Sleeve Handle
- 1/4" Magnetic Bit Holder
- Pen-Style Voltage Tester
- Fastener Set (40 Self-Tapping Screws: 22×ST3.5, 10×ST4, 8×ST5
- 40 Plastic Wall Plugs: 22×5mm, 10×6mm, 8×8mm)
- Drill Bit Set (4 Wood Drill Bits: 4, 5, 6, 8mm; 5 Masonry Drill Bits: 4, 5, 6, 8, 10mm; 5 Twist Drill Bits: 2, 3, 4, 5, 6mm)
- Plastic Case Packing

ADJZ2090i(TYPE EM/AM/Z) CORDLESS BRUSHLESS DRIVER/ HAMMER DRILL 20MAX V



Battery	20V MAX/4.0Ah×2/2.0Ah×2/Solo	
Max. Power Output		700W
Max. Chucking Capacity		13mm
No-load Speed	1st gear	0-500/min
	2nd gear	0-2200/min
Rated Impact frequency		0-34500/min
Max. Drilling Dia.	Steel	Φ13mm
	Brick Wall	Φ13mm
	Wood	Φ52mm
Torque Setting		19+2
Max. Torque		90N·m
Net Weight		1.9/1.7/1.3kg

- (Type EM) 4.0Ahx2, 2A Charger
  (Type AM) 2.0Ahx2, 2A Charger (Type Z) Solo, Carton Packing


Screws in and out up to **470pcs** ST6×50mm wood screws in 50mm pine board with a 4.0Ah battery pack

Features

- Brushless motor: delivering up to 90N.m of torque and 2200/min no-load speed;
- 19+2 torque setting: for a variety of applications;
- 13mm (1/2") Ratchet metal chuck: sturdy and durable;
- DSC: Safety Control Technology: protecting the machine and user when the drill bit gets stuck.

Accessories & Package

- Belt Clip
- Driver Bit
- Plastic Case Packing (Except Type Z)

EXTREME PERFORMANCE WITH ULTRA COMPACT DESIGN

BRUSHLESS MOTOR
Delivering up to 90N.m of torque and 2200/min no-load speed

SELF-TAPPING MODE
Soft start for accurate positioning

19+2 TORQUE SETTING
For a variety of applications

13mm (1/2") RATCHET METAL CHUCK
Sturdy and durable

DSC: SAFETY CONTROL TECHNOLOGY
Protecting the machine and user when the drill bit gets stuck



ADJZ2090i

CORDLESS BRUSHLESS DRIVER/HAMMER DRILL

TYPE(EM/AM/Z)

20V MAX Lithium-Ion
EC BRUSHLESS
STOP

*Specifications may differ from country to country.

EXCELLENT IN CONTINUOUS HEAVY-DUTY WORK

BRUSHLESS MOTOR
Delivering up to 120N.m of torque and up to 2000/min no-load speed

2-SPEED ADJUSTMENT
High torque for screw driving, high speed for drilling

13mm (1/2") RATCHET METAL CHUCK
Sturdy and durable

24+2 TORQUE SETTING
For a variety of applications



ADJZ20V-120i

CORDLESS BRUSHLESS DRIVER/HAMMER DRILL

TYPE(FK/EM/Z)

20V MAX Lithium-Ion
EC BRUSHLESS
STOP

ADJZ20V-120i(TYPE FK/EM/Z) CORDLESS BRUSHLESS DRIVER/HAMMER DRILL 20MAX V



Battery		20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output		850W
Max. Chucking Capacity		13mm
Max. Screw Dia.		10mm
No-load Speed	1st gear	0-500/min
	2nd gear	0-2000/min
Rated Impact Frequency		0-32000/min
Max. Drilling Dia.	Steel	Φ13mm
	Brick wall	Φ13mm
	Wood	Φ45mm
Torque Setting		24+2
Max. Torque		120N·m
Net Weight		2.2/2.2/1.6kg

● (Type FK) 5.0Ahx2, 4A Charger
(Type EM) 4.0Ahx2, 2A Charger (Type Z) Solo, Carton Packing



Features
- Brushless motor, delivering up to 120N.m of torque and up to 2000/min no–load speed;
- 24+2 torque setting, for a variety of applications;
- 13mm (1/2") ratchet metal chuck, sturdy and durable;
- 2–speed adjustment, high torque for screw driving, high speed for drilling.

Accessories & Package
- Auxiliary Handle • Belt Clip • Driver Bit • Plastic Case Packing (Except Type Z)

ADJZ20160i(TYPE FK/EM/Z) CORDLESS BRUSHLESS DRIVER/HAMMER DRILL 20MAX V



Battery		20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output		1000W
Max. Chucking Capacity		13mm
No-load Speed	1st gear	0-500/min
	2nd gear	0-2100/min
Rated Impact frequency		0-33600/min
Max. Drilling Dia.	Steel	Φ13mm
	Brick Wall	Φ16mm
	Wood	Φ65mm
Torque Setting		19+2
Max. Torque		160N·m
Net Weight		2.4/2.4/1.8kg

● (Type FK) 5.0Ahx2, 4A Charger
(Type EM) 4.0Ahx2, 2A Charger (Type Z) Solo, Carton Packing



Features
- Brushless motor, delivering up to 160N.m of torque and 2100/min no–load speed;
- 19+2 torque setting,for a variety of applications;
- 13mm (1/2") Ratchet metal chuck, sturdy and durable;
- DSC: Safety Control Technology, protecting the machine and user when the drill bit gets stuck;
- Self–Tapping Mode, soft start for accurate positioning.


Accessories & Package
- Auxillary Handle • Driver Bit • Belt Clip • Plastic Case Packing(Except Type Z)

ADZC22(TYPE FK/BM/Z) CORDLESS BRUSHLESS ROTARY HAMMER 20MAX V



Battery		20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output		420W
Impact Energy		2.2J
No-load Speed		0-1400/min
Rated Impact Frequency		0-4500/min
Max. Drilling Capacity	Concrete	Φ22mm
	Steel	Φ13mm
	Wood	Φ28mm
Net Weight		2.6/2.6/2.0kg

● (Type FK) 5.0Ahx2 ,4A Charger
(Type BM) 4.0Ahx2 ,2A Charger
(Type Z) Solo, Carton Packing

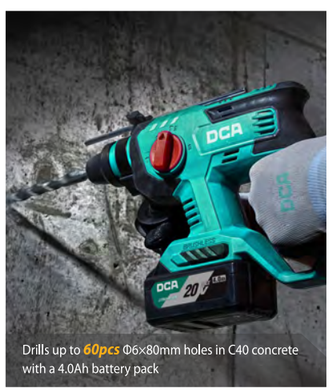

Features
- Brushless motor;
- 3–Mode operation, drill, rotary hammer and demolition;
- Adjustable speed, forward and reverse rotation;
- Electronic constant speed control, maintains constant speed under load.

Accessories & Package
- Auxiliary Handle • Depth Gauge • Catorn Packing


*Specifications may differ from country to country.

ADZC04-24(TYPE FK/EM/Z) CORDLESS BRUSHLESS ROTARY HAMMER 20MAX V



Battery		20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output		500W
Impact Energy		2.8J
No-load Speed		0-1000/min
Rated Impact Frequency		0-4500/min
Max. Drilling Capacity	Concrete	Φ24mm
	Steel	Φ13mm
	Wood	Φ28mm
Net Weight		3.2/3.2/2.6kg

● (Type FK) 5.0Ahx2 ,4A Charger
(Type EM) 4.0Ahx2 ,2A Charger
(Type Z) Solo, Carton Packing

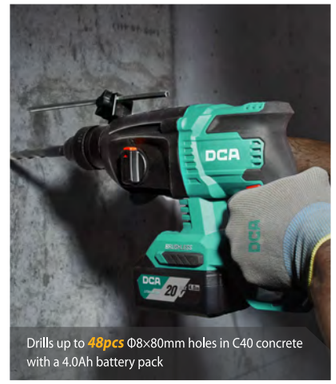

Features
- Brushless motor;
- 3–Mode operation, drill, rotary hammer and demolition;
- Stepless speed adjustment, applicable to different working conditions;
- Double safety protection, mechanical clutch and overcurrent protection.

Accessories & Package
- Auxiliary Handle • Depth Gauge • Plastic Case Packing (Except Type Z)

ADZC02-26(TYPE H2K/FK/EM/Z) CORDLESS BRUSHLESS ROTARY HAMMER 20MAX V



Battery		20V MAX/6.0Ah×2/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output		600W
Impact Energy		3.1J
No-load Speed		0-960/min
Rated Impact Frequency		0-4260/min
Max. Drilling Capacity	Concrete	Φ26mm
	Steel	Φ13mm
	Wood	Φ30mm
Net Weight		3.6/3.4/3.4/2.5kg

● (Type H2K) 6.0Ahx2, 4A Charger（Battery packs sold separately）
(Type FK) 5.0Ahx2, 4A Charger (Type EM) 4.0Ahx2, 2A Charger (Type Z) Solo, Carton Packing



Features
- Brushless motor;
- DSC Safety Control Technology, mechanical clutch and electronic sprain protection;
- Electronic constant speed control, maintains constant speed under load;
- 3–Mode operation, drill, rotary hammer and demolition.


Accessories & Package
- Auxiliary Handle • Depth Gauge • Plastic Case Packing (Except Type Z)

ADZC05-26(TYPE FK/EM/Z) CORDLESS BRUSHLESS ROTARY HAMMER 20MAX V



Battery		20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output		600W
Impact Energy		3.0J
No-load Speed		0-1180/min
Rated Impact Frequency		0-4300/min
Max. Drilling Capacity	Concrete	Φ26mm
Net Weight		3.1/3.1/2.5kg

● (Type FK) 5.0Ahx2 ,4A Charger
(Type EM) 4.0Ahx2 ,2A Charger
(Type Z) Solo, Carton Packing

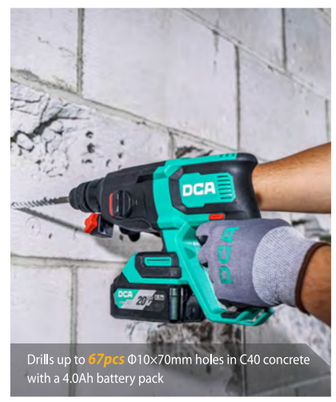

Features
- Brushless motor;
- Safety Clutch Function, automatically stop when the drill bit gets stuck;
- Electronic constant speed control;
- 3–Mode operation, drill, rotary hammer and demolition.

Accessories & Package
- Auxiliary Handle • Depth Gauge • Plastic Case Packing (Except Type Z)

GOOD CHOICE FOR HOME DECORATION

BRUSHLESS MOTOR

ONE-BUTTON REVERSING
Easier operation

3-MODE OPERATION
Drill, rotary hammer and demolition

ELECTRONIC CONSTANT SPEED CONTROL

SAFETY CLUTCH FUNCTION
Automatically stop when the drill bit gets stuck



ADZC05-26

CORDLESS BRUSHLESS ROTARY HAMMER

TYPE(FK/EM/Z)

20V MAX Lithium-Ion
EC BRUSHLESS

POWERFUL, SAFETY AND COMFORTABLE

VIBRATION REDUCTION TECHNOLOGY
Improving operation comfort

ONE-BUTTON REVERSING
Easier operation

VIBRATION REDUCTION TECHNOLOGY
Improving operation comfort

2-MODE OPERATION
Rotary hammer and demolition



ADZC20V-0228

CORDLESS BRUSHLESS ROTARY HAMMER

TYPE(H2K/FK/EM/Z)

20V MAX Lithium-Ion
EC BRUSHLESS

*Specifications may differ from country to country.

ADZC05-26L(TYPE FK/EM/Z) CORDLESS BRUSHLESS ROTARY HAMMER 20MAX V

EC BRUSHLESS DVR



Battery		20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output		600W
Impact Energy		3.0J
No-load Speed		0-1180/min
Rated Impact Frequency		0-4300/min
Max. Drilling Capacity	Concrete	Φ26mm
Net Weight		3.3/3.2/2.6kg

- (Type FK) 5.0Ahx2 ,4A Charger
  (Type EM) 4.0Ahx2 ,2A Charger
  (Type Z) Solo, Carton Packing



Features

- 450mm body length;
- Safety Clutch Function, automatically stop when the drill bit gets stuck;
- Electronic constant speed control;
- 3–Mode operation, drill, rotary hammer and demolition.

Accessories & Package

- Auxiliary Handle - Depth Gauge - Plastic Case Packing (Except Type Z)


ADZC20V-0228(TYPE H2K/FK/EM/Z) CORDLESS BRUSHLESS ROTARY HAMMER 20MAX V

EC BRUSHLESS DVR DSC



Battery		20V MAX/6.0Ah×2/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output		900W
Impact Energy		3.8J
No-load Speed		0-1050/min
Rated Impact Frequency		0-5500/min
Max. Drilling Capacity	Concrete	Φ28mm
Net Weight		4.2/3.9/3.9/3.3kg

- (Type H2K) 6.0Ahx2, 4A Charger (Battery packs sold separately)
  (Type FK) 5.0Ahx2, 4A Charger
  (Type EM) 4.0Ah×2, 2A Charger
  (Type Z) Solo, Carton Packing

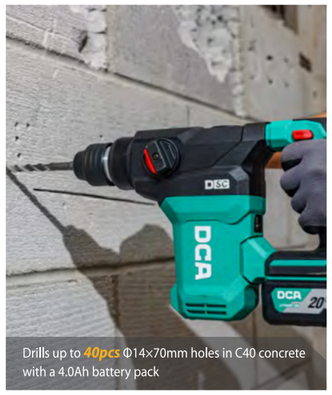

Features

- 800W brushless motor;
- DSC Safety control technology, electronic sprain protection;
- DVR: Vibration Reduction Technology, improving operation comfort;
- 2–Mode operation, rotary hammer and demolition.

Accessories & Package

- Auxiliary Handle - Plastic Case Packing (Except Type Z)

ADZC03-28(TYPE H2K/FK/Z) CORDLESS BRUSHLESS ROTARY HAMMER 20MAX V

EC BRUSHLESS DVR DSC



Battery		20V MAX/6.0Ah×2/5.0Ah×2/Solo
Max. Power Output		900W
Impact Energy		4.5J
No-load Speed		0-750/min
Rated Impact Frequency		0-3800/min
Max. Drilling Capacity	Concrete	Φ28mm
Net Weight		5.0/4.8/4.2kg

- (Type H2K) 6.0Ahx2 ,4A Charger (Battery packs sold separately)
  (Type FK) 5.0Ahx2 ,4A Charger
  (Type Z) Solo, Carton Packing



Features

- Brushless motor;
- DVR: Vibration reduction technology: Improving operation comfort;
- DSC: Mechanical clutch and electronic sprain protection;
- Constant+stepless speed control.

Accessories & Package

- Auxiliary Handle - Plastic Case Packing (Except Type Z)

*Specifications may differ from country to country.



ADSM06-100/115/125(TYPE FK/EM/Z) CORDLESS BRUSHLESS ANGLE GRINDER 20MAX V

EC BRUSHLESS

DETACHABLE METAL DUSTPROOF FILTER
Convenient for cleaning

HIGH STRENGTH GEARS
For long service life

ANTI-RESTART FUNCTION
Preventing accidental start




RUBBERIZED SLIM HANDLE DESIGN
Comfortable to hold

680W BRUSHLESS MOTOR
Efficient, powerful and durable

- (Type FK) 5.0Ahx2, 4A Charger
  (Type EM) 4.0Ahx2, 2A Charger
  (Type Z) Solo, Carton Packing

Battery	20VMAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output	680W
No-load Speed	8500/min
Max.Wheel Dia	Φ100/115/125mm
Spindle Thread	M10/M14/M14
Net Weight	2.2/2.2/1.6kg

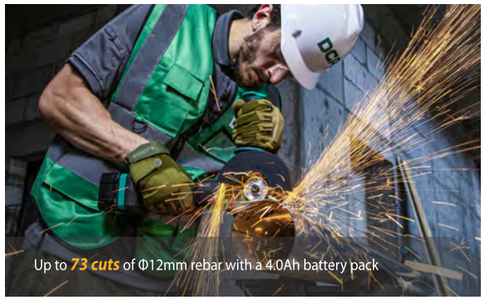

Accessories & Package

- Auxiliary Handle - Wheel Gurad - Wrench - Plastic Case Packing (Except Type Z)

COMPACT AND POWERFUL

680W BRUSHLESS MOTOR
Efficient, powerful and durable

132mm ULTRA SLIM BODY
Comfortable to hold and easy to control

MULTIPLE SAFETY PROTECTIONS
Over-temperature protection; Over-current protection
Power-off protection; Soft start; Braking

4-SPEED ELECTRONIC GEAR SHIFT
3600/5000/6600/8500 /min
Meeting different working conditions

DETACHABLE METAL DUSTPROOF FILTER
Convenient for cleaning



ADSM20V-02100/115/125

CORDLESS BRUSHLESS ANGLE GRINDER

TYPE(FK/EM/Z)

20V MAX Lithium-Ion

EC BRUSHLESS

*Specifications may differ from country to country.


ADSM20V-02100(TYPE FK/EM/Z) CORDLESS BRUSHLESS ANGLE GRINDER 20V MAX

EC BRUSHLESS



- (Type FK) 5.0Ahx2, 4A Charger
  (Type EM) 4.0Ahx2, 2A Charger
  (Type Z) Solo, Carton Packing

Battery	20V MAX/5.0Ahx2/4.0Ahx2/Solo
Max. Power Output	680W
Max.Wheel Dia.	Φ100mm
Rated Speed	3600/5000/6600/8500/min
Spindle Thread	M10
Net Weight	1.9/1.9/1.3kg

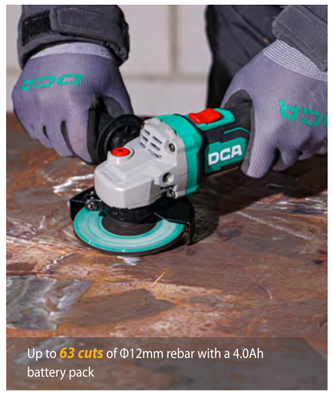

Features

- 680W Brushless Motor, efficient, powerful and durable;
- 132mm ultra slim body, comfortable to hold and easy to control;
- Multiple safety protections: over-temperature protection; over-current protection; power-off protection; soft start; braking;
- 4-speed electronic gear shift, meeting different working conditions.

Accessories & Package

- Auxiliary Handle · Wheel Guard · Wrench · Plastic Case Packing (Except Type Z)


ADSM20V-02115(TYPE FK/EM/Z) CORDLESS BRUSHLESS ANGLE GRINDER 20V MAX

EC BRUSHLESS



- (Type FK) 5.0Ahx2, 4A Charger
  (Type EM) 4.0Ahx2, 2A Charger
  (Type Z) Solo, Carton Packing

Battery	20V MAX/5.0Ahx2/4.0Ahx2/Solo
Max. Power Output	680W
Max.Wheel Dia.	Φ115mm
Rated Speed	3600/5000/6600/8500/min
Spindle Thread	M14
Net Weight	2.0/2.0/1.4kg

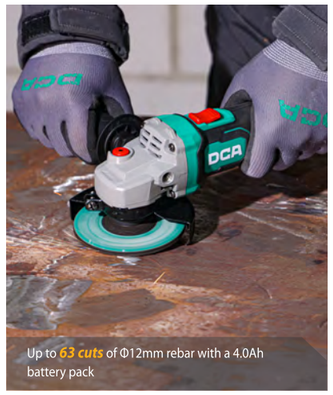

Features

- 680W Brushless Motor, efficient, powerful and durable;
- 132mm ultra slim body, comfortable to hold and easy to control;
- Multiple safety protections: over-temperature protection; over-current protection; power-off protection; soft start; braking;
- 4-speed electronic gear shift, meeting different working conditions.

Accessories & Package

- Auxiliary Handle · Wheel Guard · Wrench · Plastic Case Packing (Except Type Z)


ADSM20V-02125(TYPE FK/EM/Z) CORDLESS BRUSHLESS ANGLE GRINDER 20V MAX

EC BRUSHLESS



- (Type FK) 5.0Ahx2, 4A Charger
  (Type EM) 4.0Ahx2, 2A Charger
  (Type Z) Solo, Carton Packing

Battery	20V MAX/5.0Ahx2/4.0Ahx2/Solo
Max. Power Output	680W
Max.Wheel Dia.	Φ125mm
Rated Speed	3600/5000/6600/8500/min
Spindle Thread	M14
Net Weight	2.0/2.0/1.4kg

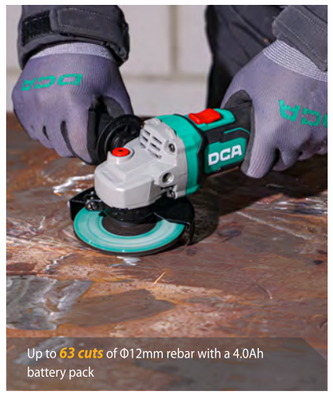

Features

- 680W Brushless Motor, efficient, powerful and durable;
- 132mm ultra slim body, comfortable to hold and easy to control;
- Multiple safety protections: over-temperature protection; over-current protection; power-off protection; soft start; braking;
- 4-speed electronic gear shift, meeting different working conditions.

Accessories & Package

- Auxiliary Handle · Wheel Guard · Wrench · Plastic Case Packing (Except Type Z)

ADSJ0401(TYPE E) CORDLESS DIE GRINDER 4V



Battery	4V/1.5Ah
Max. Power Output	12W
Max. Collet Size	Φ3.2mm
No-load Speed	5000/12000/18000/min
Speed Shifting Gears	1-2-3
Net Weight	0.13kg



Features

- LED working light: convenient for working in dark scene;
- Φ3.2mm max. collet size;
- Spindle lock design, for fast accessory changes;
- 3-speed adjustment, applicable to different working conditions.

Accessories & Package

- Milling Cutter*1 • Great Sand Ring*4 • Small Sand Circle*4 • Sanding Drums*2 • Mandrel*2 • Grinding Needle*4 Polishing Paste*1 • Cutting Cutter*10 • Abrasive Papers*10 • Grinding Stones*4 • Hss Drill Bit (Φ3.2mm) *1 Large Wool Wheel*2 • Stainless SteelBrush*1 • Type-C*1 • Plastic Case Packing

ADSJ0801(TYPE E) CORDLESS DIE GRINDER 8V



Battery	8V/0.9Ah
Max. Power Output	64W
Max. Collet Size	Φ3.2mm
No-load Speed	6000/11500/17000/22500/28000/min
Speed Shifting Gears	1-2-3-4-5
Net Weight	0.27kg



Features

- LED working light: convenient for working in dark scene;
- Φ3.2mm max. collet size;
- Spindle lock design, for fast accessory changes;
- 5-speed adjustment, applicable to different working conditions.

Accessories & Package

- Milling Cutter*1 • Great Sand Ring*4 • Small Sand Circle*4 • Sanding Drums*2 • Mandrel*2 • Grinding Needle*4 Cutting Cutter*20 • Abrasive Papers*20 • Grinding Stones*4 • Hss Drill Bit (Φ3.2mm) *1 • Large Wool Wheel*2 Stainless Steel Brush*1 • Wrench*1 • Type-C*1 • Plastic Case Packing

ADSJ10(TYPE EK/Z) CORDLESS DIE GRINDER 12V MAX



Battery	12V MAX/2.0Ahx2/Solo
Max. Power Output	250W
No-load Speed	5000-32000/min
Speed Shifting Gears	1-2-3-4-5-6
Max.Collet Size	Φ3.2mm
Max. Grinding Wheel Dia	10mm
Power Display	3
Net Weight	0.61/0.41kg

- (Type EK) 2.0Ahx2, 3A Charger
  (Type Z) Solo, Carton Packing



Features

- 250W high quality motor;
- 6-speed adjustment, applicable to different working conditions;
- Φ3.2mm max. collet size;
- Spindle lock design, for fast accessory changes.

Accessories & Package

- Grinding Wheel (5pcs) • Wrench • Plastic Case Packing (Except Type Z)

*Specifications may differ from country to country.



ADMY125(TYPE FK/BM/Z) CORDLESS BRUSHLESS CIRCULAR SAW 20V MAX

EC BRUSHLESS

6700/min MAX. NO-LOAD SPEED
For efficient cutting

ADJUSTABLE 0-45° CUTTING ANGLE



2.4kg LIGHTWEIGHTBODY
With a 4.0Ah battery

PARALLEL STRUCTURE DESIGN
Labor-saving and efficient

● (Type FK) 5.0Ahx2 ,4A Charger
(Type BM) 4.0Ahx2 ,2A Charger (Type Z) Solo, Carton Packing

Battery		20V MAX/5.0Ahx2/4.0Ahx2/Solo
Max. Power Output		800W
No-load Speed		
	Low	4200/min
	High	6700/min
Blade Dia.		Φ125mm
Blade Bore.		Φ20mm
Max.cutting Capacity		0° 45mm
		45° 33mm
Max.cutting Angle		45°
Net Weight		2.4/2.4/1.8kg

Accessories & Package

• Saw Blade • Hex Wrench • Fixing Plate • Carton Packing



ADMY140S(TYPE FK/EM/Z) CORDLESS BRUSHLESS CIRCULAR SAW 20V MAX

EC BRUSHLESS



● (Type FK) 5.0Ah×2, 4A Charger
(Type EM) 4.0Ah×2, 2A Charger (Type Z) Solo, Carton Packing


Battery		20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output		800W
No-load Speed	Low	4200/min
	High	6700/min
Blade Dia.		Φ140mm
Blade Bore.		Φ20mm
Max. Cutting Capacity		0° 51mm
		45° 35mm
Max.Cutting Angle		45°
Net Weight		2.3/2.3/1.7kg

Features

• 800W powerful motor, for efficient cutting;
• Parallel structure design, labor–saving and efficient;
• 0–51mm adjustable cutting depth;
• 2–speed adjustment.

Accessories & Package

• Saw Blade • Hex Wrench • Fixing Plate • Carton Packing

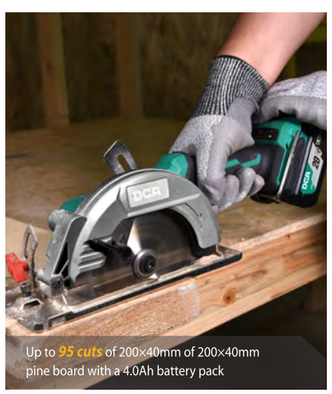

*Specifications may differ from country to country.

ADMY02-155(TYPE FK/BM/Z) CORDLESS BRUSHLESS CIRCULAR SAW 20V MAX

EC BRUSHLESS



Battery		20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output		800W
No-load Speed		6200/min
Blade Dia.		Φ150mm
Blade Bore.		Φ20mm
Max. Cutting Capacity		0° 56mm
		45° 43mm
Max.Cutting Angle		45°
Net Weight		2.6/2.6/1.95kg

● (Type BM) 4.0Ah×2, 2A Charger
(Type FK) 5.0Ah×2, 4A Charger (Type Z) Solo, Carton Packing

Features

• 800W powerful brushless motor, for efficient cutting;
• 1.95kg lightweight body (with a 4.0Ah battery);
• Optimize air duct design, effectively extending the lifetime of product;
• 0–56mm adjustable cutting depth.

Accessories & Package

• Saw Blade • Hex Wrench • Fixing Plate • Carton Packing



ADMY165S(TYPE FK/BM/BDM/Z) CORDLESS BRUSHLESS CIRCULAR SAW 20V MAX

EC BRUSHLESS



Battery		20V MAX/5.0Ah×2/4.0Ah×2/ 4.0Ah×1/Solo
Max. Power Output		840W
No-load Speed		5000/min
Blade Dia.		Φ165mm
Blade Bore.		Φ20mm
Max. Cutting Capacity	0°	59mm
	45°	43mm
	50°	39mm
Max. Cutting Angle		50°
Net Weight		3.7/3.7/3.7/3.1kg

● (Type FK) 5.0Ahx2, 4A Charger (Type BM) 4.0Ahx2, 2A Charger
(Type BDM) 4.0Ahx1, 2A Charger (Type Z) Solo, Carton Packing

Features

• 840W powerful brushless motor, delivering efficient cutting;
• 0–50° adjustable cutting angle, for various machining requirements;
• Rubberized handle, comfortable to hold;
• 0–59 mm adjustable cutting depth.

Accessories & Package

• Hex Wrench • Fixing Plate • Saw Blade (Type Z: Not Included) • Carton Packing



ADMY02-185(TYPE FK/BM/DM/Z) CORDLESS BRUSHLESS CIRCULAR SAW 20V MAX

EC BRUSHLESS



Battery		20V MAX/5.0Ah×2/4.0Ah×2/ 4.0Ah×1/Solo
Max. Power Output		850W
No-load Speed		5000/min
Blade Dia.		Φ185mm
Blade Bore.		Φ20mm
Max. Cutting Capacity	0°	65mm
	45°	45mm
Max. Cutting Angle		45°
Net Weight		4.1/4.1/4.1/3.5kg

● (Type FK) 5.0Ahx2, 4A Charger (Type BM) 4.0Ahx2, 2A Charger
(Type DM) 4.0Ahx1, 2A Charger (Type Z) Solo, Carton Packing

Features

• 850W powerful brushless motor, for efficient cutting;
• 0–65mm adjustable cutting depth;
• Aluminum alloy die–casting baseplate, sturdy and durable;
• Rubberized handle, comfortable to hold.

Accessories & Package

• Saw Blade (TYPE Z: Not Included) • Hex Wrench • Fixing Plate • Carton Packing



RECOMMENDED ACCESSORIES

Suitable for cordless circular saw

Longer life
Higher efficiency
Higher precision

TCT Saw Blade(Sharp Type)						Product Code	PCS/ CTN
Diameter	Tooth Thickness (mm)	Aperture (mm)	Number of Teeth	Tooth Shape	Application Scenarios		
125(5")	1.5	20	24T	ATB	Wood	30270600075	100
140(5-1/2")	1.6	20	24T	ATB	Wood	30270600078	100
165(6-1/2")	1.5	20	24T	ATB	Wood	30270600074	50
185(7")	1.6	20	24T	ATB	Wood	30270600073	50



ADJF03-15(TYPE B/Z) CORDLESS SABRE SAW 12MAX V



Battery		12V MAX/2.0Ah×2/Solo
Max. Power Output		150W
No-load Speed		0-3000/min
Length of Strokes		14.5mm
Max. Cutting Depth	Steel	8mm
	Wood	65mm
	Pipe	50mm
Net Weight		1.2/1.0kg

● (Type B) 2.0Ahx2, 1.3A Charger
(Type Z) Solo, Carton Packing



Features

- Stepless speed adjustment, applicable to different working conditions;
- Tool–less blade change system, for convenient blade insertion and ejection;
- One–handed operation design, well balanced and easy to control;
- Efficient heat dissipation air vents, effectively extending the lifetime of products.

Accessories & Package

- BIM Saw Blade (Metal) - HCS Saw Blade (wood) - Carton Packing

ADJF02-28(TYPE FK/EM/Z) CORDLESS RECIPROCATING SAW 20MAX V



Battery		20V MAX/5.0Ahx2/4.0Ahx2/Solo
Max. Power Output		500W
No-load Speed		0-3300/min
Length of Strokes		28mm
Max. Cutting Depth	Steel	20mm
	Wood	250mm
	Tube	130mm
Base Plate Ajustment		4
Net Weight		3.4/3.4/2.8kg

● (Type FK) 5.0Ahx2, 4A Charger
(Type EM) 4.0Ahx2, 2A Charger
(Type Z) Solo, Carton Packing



Features

- Stepless speed adjustment, applicable to different working conditions;
- Adjustable base plate, applicable to different working conditions;
- Tool–less blade change system, for convenient blade insertion and ejection;
- Efficient heat dissipation air vents, effectively extending the lifetime of products.

Accessories & Package

- BIM Saw Blade (Metal) - HCS Saw Blade (wood) - Carton Packing

*Specifications may differ from country to country.

ADJF20V-22(TYPE FK/EM/DM/Z) CORDLESS BRUSHLESS RECIPROCATING SAW 20MAX V

EC BRUSHLESS

BRUSHLESS MOTOR
Delivering up to 3000/min no-load speed

TOOL-LESS BLADE CHANGE SYSTEM
For fast, convenient blade insertion and ejection

STEPLESS SPEED ADJUSTMENT
Applicable to different working conditions



SVC : SUPER VIBRATION CONTROL TECHNOLOGY
Effectively reducing the fatigue of the operators

ONE-HAND

ONE-HANDED OPERATION DESIGN
Well balanced and easy to control

ADJUSTABLE BASE PLATE
Ensures cutting efficiency

● (Type FK) 5.0Ahx2 ,4A Charger (Type EM) 4.0Ahx2 ,2A Charger
(Type DM) 4.0Ahx1 ,2A Charger (Type Z) Solo, Carton Packing

Battery		20V MAX/5.0Ahx2/4.0Ahx2/ 4.0Ahx1/Solo
Max. Power Output		450W
Stroke		22mm
Max. Cutting Depth	Metal	15mm
	Wood	180mm
	Pipe	100mm
No-load Speed		0-3000/min
Net Weight		2.4/2.4/2.4/1.8kg



Accessories & Package

- Wood Saw Blades - Steel Saw Blades - Plastic Case Packing (Except Type Z)

ADJF32(TYPE FK/EM/Z) CORDLESS BRUSHLESS RECIPROCATING SAW 20MAX V

EC BRUSHLESS



Battery		20V MAX/5.0Ahx2/4.0Ahx2/Solo
Max. Power Output		900W
No-load Speed		0-2800/min
Length of Strokes		32mm
Max. Cutting Depth	Steel	20mm
	Wood	255mm
	Tube	130mm
Base Plate Ajustment		3
Net Weight		3.9/3.9/3.3kg

● (Type FK) 5.0Ahx2, 4A Charger
(Type EM) 4.0Ahx2, 2A Charger
(Type Z) Solo, Carton Packing



Features

- Brushless motor, delivering up to 2800/min no–load speed;
- Tool–less blade change system, for convenient blade insertion and ejection;
- 4 orbital–action settings, for increased cutting performance;
- Adjustable base plate, applicable to different working conditions;
- Two–finger trigger switch, easy to operation.

Accessories & Package

- BIM Saw Blade (Metal) - HCS Saw Blade (wood) - Plastic Case Packing(Except Type Z)



ADMQ2065(TYPE EM/EDM/Z) CORDLESS BRUSHLESS JIG SAW 20MAX V

New COMING SOON



Battery	20V MAX/4.0Ahx2/4.0Ahx1/Solo	
Max. Power Output		500W
No-load Speed		0-3500 /min
Length of Strokes		26mm
Max. Cutting Depth	Wood	75mm
Max. Cutting Angle		0-45°Left/Right
Net Weight		2.2/2.2/1.6kg



● (Type EM) 4.0Ahx2, 2A Charger
(Type EDM) 4.0Ahx1, 2A Charger (Type Z) Solo, Carton Packing

Features

- Brushless motor, high-efficiency, powerful and durable;
- 6-speed adjustment, applicable to different working conditions;
- 4 orbital-action settings, for increased cutting performance.

Accessories & Package

- Saw Blade (2pcs) (T144D, T118A) - Plastic Case Packing (Except Type Z)

ADMQ85(TYPE FK/EM/EDM/Z) CORDLESS BRUSHLESS JIG SAW 20MAX V



Battery	20V MAX/5.0Ahx2/4.0Ahx2/4.0Ahx1/Solo	
Max. Power Output		420W
No-load Speed		800-3500/min
Length of Strokes		26mm
Max. Cutting Depth	Steel	10mm
	Aluminium	20mm
	Wood	Φ120mm
Max. Cutting Angle		0-45°Left/Right
Net Weight		2.8/2.8/2.8/2.2kg



● (Type FK) 5.0Ahx2, 4A Charger
(Type EM) 4.0Ahx2, 2A Charger
(Type EDM) 4.0Ahx1, 2A Charger (Type Z) Solo, Carton Packing

Features

- Brushless motor, high-efficiency, powerful and durable;
- 6-speed adjustment, applicable to different working conditions;
- Tool-less blade change system, for faster blade installation and removal;
- 4 orbital-action settings, for increased cutting performance.

Accessories & Package

- Saw Blade (2pcs) (T144D, T118A) - Plastic Case Packing(Except Type Z)

*Specifications may differ from country to country.

ADZE125(TYPE FK/EM/Z) CORDLESS BRUSHLESS MARBLE CUTTER 20MAX V



Battery	20V MAX/5.0Ahx2/4.0Ahx2/Solo	
Max. Power Output		800W
No-load Speed		9500/min
Blade Dia.		Φ125mm
Blade Bore.		Φ20mm
Max. Cutting Capacity		41.5mm
Bevel Cutting Angle		0-45°
Net Weight		2.5/2.5/1.9kg



● (Type FK) 5.0Ahx2, 4A Charger
(Type EM) 4.0Ahx2, 2A Charger (Type Z) Solo, Carton Packing

Features

- 800W powerful brushless motor;
- Ultra-compact body, easy to carry and comfortable to hold;
- 0-41.5mm adjustable cutting depth;
- Efficient heat dissipation air vents, effectively extending the lifetime of product.

Accessories & Package

- Socket Wrench - Open-end Wrench - Carton Packing

ADJT201140(TYPE BM/BDM/Z) CORDLESS BRUSHLESS BAND SAW 20MAX V

New COMING SOON



Battery	20V MAX/4.0Ahx2/4.0Ahx1/Solo	
Max. Power Output		110W
No-load Speed		130-275/min
Max. Cutting Capacity	Square Shape	127x127mm
	Round Shape	Φ127mm
Net Weight		6.0/6.0/5.4kg



● (Type BM) 4.0Ahx2, 2A Charger (Type BDM) 4.0Ahx1, 2A Charger
(Type Z) Solo, Carton Packing

Features

- Smooth operation, max 127mm cutting depth;
- 6-speed variable control, easy speed adjustment;
- Adjustable blade guard: anti-jam, blade & hand protection;
- One-button safety lock, prevent accidental startup.

Accessories & Package


- Hex Wrench x 2 - Carton Packing

ADPV2050(TYPE BM/BDM/Z) CORDLESS BRUSHLESS PIPE CUTTER 20MAX V

New COMING SOON



Battery	20V MAX/4.0Ahx2/4.0Ah×1/Solo	
Max. Power Output		600W
Cutting Capacity	PPR Pipe	Dn50 × 8.3
Cutting Time		9s
Dimensions		355×178×77mm
Net Weight		2.6/2.6/2.0kg

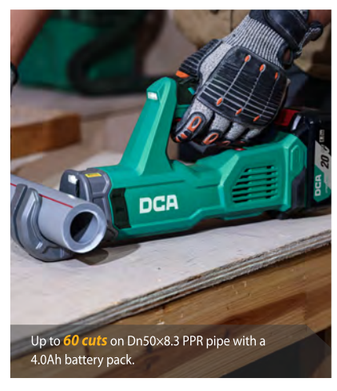

● (Type BM) 4.0Ahx2, 2A Charger (Type BDM) 4.0Ahx1, 2A Charger
(Type Z) Solo, Carton Packing

Features

- Brushless motor, High-efficiency, powerful and durable;
- 4-speed adjustment, applicable to different working conditions;
- SK85 Blade, high-strength and wear-resistant for extended service life.

Accessories & Package

- Wrench - Carton Packing

ADJJ1.6(TYPE AM/Z) CORDLESS BRUSHLESS METAL SHEAR 20MAX V



Battery		20V MAX/2.0Ahx2/Solo
Max. Power Output		400W
No-load Speed		0-2500/min
Shearing Capacity	Aluminum	1.6mm
	Stainless Steel	0.8mm
Net Weight		1.7/1.4kg


● (Type AM) 2.0Ahx2, 2A Charger (Type Z) Solo, Carton Packing

Features

- Brushless motor;
- Max. cutting capacity of 1.6 mm in aluminum;
- Stepless speed adjustment, applicable to different working conditions;
- High-quality cutting blade, sharp and durable.

Accessories & Package

- Hex key (4mm*1/2.5mm*1) - Plastic Case Packing(Except Type Z)

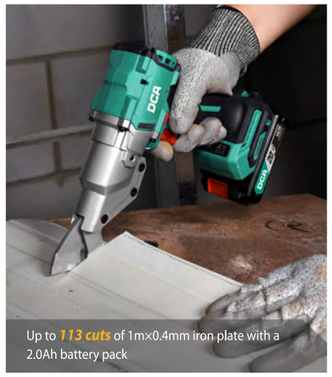

ADJJ2.5(TYPE BM/Z) CORDLESS BRUSHLESS METAL SHEAR 20MAX V



Battery		20V MAX/4.0Ahx2/Solo
Max. Power Output		700W
No-load Speed		0-1500/min
Shearing Capacity	Aluminum	3.2mm
	Stainless Steel	2.5mm
Net Weight		2.8/2.2kg


● (Type BM) 4.0Ahx2, 2A Charger (Type Z) Solo, Carton Packing

Features

- 700W high quality motor;
- Large hand guard, for maximum safety in cutting direction;
- High strength aluminum gear box, robust and durable;
- High-quality cutting blade, sharp and durable.

Accessories & Package

- Hex key(4mm × 1) - Thickness Gauge - Carton Packing

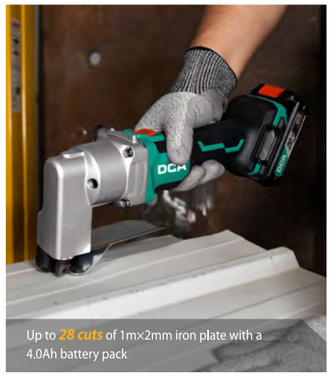

ADMD12(TYPE EK/Z) CORDLESS MULTI-TOOL 12MAX V



Battery	12V MAX/2.0Ahx2/Solo
Max. Power Output	250W
Oscillations Frequency	5000-20000/min
Speed Shifting Gears	2-4-6-8-10-12
Oscillation Angle	3°
Power Display	3
Net Weight	0.95/0.75kg

● (Type EK) 2.0Ahx2, 3A Charger
(Type Z) Solo, Carton Packing

Features

- Equipped with different accessories, meeting multiple applications;
- 3° oscillation angle with high frequency, for high working efficiency;
- 0.95kg light-weight body(with a 2.0Ah battery);
- 6-speed adjustment, meeting different working conditions;
- Efficient heat dissipation air vents, effectively extending the lifetime of products.

Accessories & Package

- Adaptor For Tool Holder - Cut Saw Blade (2pcs) - Segment Saw Blade - Scraper - Sanding Plate Abrasive Paper (12pcs) - Hex Wrench - Plastic Case Packing (Except Type Z)



*Specifications may differ from country to country.

ADMD20(TYPE FK/EM/DM/Z) CORDLESS BRUSHLESS OSCILLATING MULTI-TOOL 20MAX V



Battery	20V MAX/5.0Ahx2/4.0Ahx2/ 2.0Ahx1/Solo
Max. Power Output	400W
Oscillations Frequency	6000-18000/min
Oscillation Angle	3.2°
Net Weight	2.0/2.0/1.7/1.4kg

● (Type FK) 5.0Ahx2, 4A Charger (Type EM) 4.0Ahx2, 2A Charger
(Type DM) 2.0Ahx1, 2A Charger (Type Z) Solo, Carton Packing

Features

- 400W high quality motor;
- Tool-less blade change system, for convenient blade insertion and ejection;
- 3.2° oscillation angle with high frequency, for high working efficiency;
- 6-speed adjustment, applicable to different working conditions;
- Equipped with different accessories, meeting multiple applications.

Accessories & Package

- Cut Saw Blade BIM&HCS (2pcs) - Segment Saw Blade - Scraper - Sanding Plate Abrasive Paper (15pcs) - Plastic Case Packing (Except Type Z)



ADMB82(TYPE FK/BM/BDM/Z) CORDLESS BRUSHLESS PLANER 20MAX V



Battery	20V MAX/5.0Ahx2/4.0Ahx2/ 4.0Ahx1/Solo
Max. Power Output	600W
No-load Speed	16000/min
Max.Planing Width	82mm
Max.Planing Depth	2mm
Net Weight	2.9/2.9/2.9/2.3kg

● (Type FK) 5.0Ahx2, 4A Charger (Type BM) 4.0Ahx2, 2A Charger
(Type BDM) 4.0Ahx1, 2A Charger (Type Z) Solo, Carton Packing

Features

- 600W brushless motor, powerful planing;
- Two-way dust removal, smooth discharge of wood chips;
- 2mm Max.planing depth;
- Double-rolling blades, planing wood effortlessly.

Accessories & Package

- Sharpening Holder Assembly - Blade Gauge - Socket Wrench - Guide Plate Assembly - Dust Bag - Carton Packing



ADMP6(TYPE FK/BM/Z) CORDLESS BRUSHLESS TRIMMER 20MAX V



Battery	20V MAX/5.0Ahx2/4.0Ahx2/Solo
Max. Power Output	600W
No-load Speed	10000-30000/min
Collet Size	Φ6-Φ8mm
Net Weight	2.1/2.1/1.5kg

● (Type FK) 5.0Ahx2, 4A Charger
(Type BM) 4.0Ahx2, 2A Charger (Type Z) Solo, Carton Packing

Features

- 6 Speed electronic constant speed control, applicable to different working conditions;
- 600W brushless motor;
- Flashing alarm for malfunctions;
- Multiple optional bases;
- Connected to dust collection system: for dust-free working.

Accessories & Package

- Open-end Wrench 22mm - Open-end Wrench 9/13mm - Socket Wrench 8mm - Straight Guide - Templet Guide
- Trimmer Guide Assembly - Square Base Plate - Dust Cap - Tool Carrying Bag(Except Type Z) - Carton Packing



ADYJ05-120(TYPE EM/Z) CORDLESS HYDRAULIC CABLE CUTTER 20V MAX



● (Type EM) 4.0Ahx2, 2A Charger
(Type Z) Solo, Carton Packing

Battery	20V MAX/4.0Ah×2/Solo
Max. Power Output	450W
Max. Crimping Force	150KN
Stroke	62mm
Max. Crimping Dia	Φ120mm
Oil Capacity	≈250mL
Hydraulic Oil Suggestion	Shell Tellus S2V HV15
Working Temperature	-10-40°C
Net Weight	13.9/13.3kg



Features

- 15T Powerful hydraulic pump;
- 350° rotatable working head, convenient for working in tight space;
- Automatic retraction function, improving working efficiency;
- Manual reset function, increased operational safety and convenience in the event of a fault;
- OLED display, intuitive display of working status.

Accessories & Package

- Sealing Ring of Cylinder (1set) - Plastic retaining rings (1pcs) - Auxiliary Handle - Plastic Case Packing

ADYH05-300(TYPE EM/Z) CORDLESS HYDRAULIC CABLE CRIMPING TOOL 20V MAX



● (Type EM) 4.0Ahx2, 2A Charger
(Type Z) Solo, Carton Packing

Battery	20V MAX/4.0Ah×2/Solo
Max. Power Output	450W
Max. Crimping Force	60KN
Max. Crimping Dia	Cu 300mm²/ Al 240mm²
Oil Capacity	≈115mL
Hydraulic Oil Suggestion	Shell Tellus H2V HV15
Crimping Cycle	2.5-5s (depend on size of cable)
Working Temperature	-10-40°C
Net Weight	5.6/5.0kg



Features

- 6T Powerful hydraulic pump;
- 350° rotatable working head, convenient for working in tight space;
- Automatic retraction function, improving working efficiency;
- Manual reset function, increased operational safety and convenience in the event of a fault;
- OLED display, intuitive display of working status.

Accessories & Package

- Sealing Ring of Cylinder (1set) - Plastic washer (3pcs)
- Crimping Dies (12pcs) (10, 16, 25, 35, 50, 70, 95, 120, 150, 185, 240, 300mm²) - Plastic Case Packing

ADYH05-400(TYPE EM/Z) CORDLESS HYDRAULIC CABLE CRIMPING TOOL 20V MAX



● (Type EM) 4.0Ahx2, 2A Charger
(Type Z) Solo, Carton Packing

Battery	20V MAX/4.0Ah×2/Solo
Max. Power Output	450W
Max. Crimping Force	120KN
Max. Crimping Dia	Cu 400mm²/ Al 300mm²
Oil Capacity	≈160mL
Hydraulic Oil Suggestion	Shell Tellus H2V HV15
Crimping Cycle	5-15s (depend on size of cable)
Working Temperature	-10-40°C
Net Weight	7.6/7.0kg



Features

- 12T Powerful hydraulic pump;
- 350° rotatable working head, convenient for working in tight space;
- Automatic retraction function, improving working efficiency;
- Manual reset function, increased operational safety and convenience in the event of a fault;
- OLED display, intuitive display of working status.

Accessories & Package

- Sealing Ring of Cylinder (1set) - Sealing Ring of Safety Valve (1set) - Suspension Straps
- Crimping Dies (13pcs) (10, 16, 25, 35, 50, 70, 95, 120, 150, 185, 240, 300, 400mm²) - Plastic Case Packing

ADTX4V-0211 GREEN LASER LEVEL 4V



Approximately 11 hours of operation when the laser is fully activated

Fuction Code: 1V 1H

Power Supply	4V/5.2Ah
Laser Diode	515nm
Vertical Accuracy	5m±1mm
Leveling Accuracy	5m±1mm
Auto-leveling Range	±3°
Leveling Range	≥120°
Vertical Range	≥120°
Width of Laser Line	2.5mm at distance of 5m
Operating Temperature	-10℃~40℃
Laser Class	3R
Tripod thread	5/8"
Net Weight	0.9kg

Features

- High intensity green laser, for clearer display;
- Full rubber overmold housing, helping to protect major impact points;
- Smart Pendulum System, self levels and indicates out-of-level condition up to ±3° .

Accessories & Package

- Type-C Cable × 1 - Battery Pack × 2 - Plastic Case Packing

ADTX4V-0221 GREEN LASER LEVEL 4V



Approximately 8 hours of operation when the laser is fully activated

Fuction Code: 2V 1H

Power Supply	4V/5.2Ah
Laser Diode	515nm
Vertical Accuracy	5m±1mm
Leveling Accuracy	5m±1mm
Auto-leveling Range	±3°
Leveling Range	≥120°
Vertical Range	≥120°
Width of Laser Line	2.5mm at distance of 5m
Operating Temperature	-10℃~40℃
Laser Class	3R
Tripod thread	5/8"
Net Weight	0.9kg

Features

- High intensity green laser, for clearer display;
- Full rubber overmold housing, helping to protect major impact points;
- Smart Pendulum System, self levels and indicates out-of-level condition up to ±3° .

Accessories & Package

- Type-C Cable × 1 - Battery Pack × 2 - Plastic Case Packing

ADTX4V-0241 GREEN LASER LEVEL 4V



Approximately 5 hours of operation when the laser is fully activated

Fuction Code: 4V 1H

Power Supply	4V/5.2Ah
Laser Diode	515nm
Vertical Accuracy	5m±1mm
Leveling Accuracy	5m±1mm
Auto-leveling Range	±3°
Leveling Range	≥120°
Vertical Range	≥120°
Width of Laser Line	2.5mm at distance of 5m
Operating Temperature	-10℃~40℃
Laser Class	3R
Tripod thread	5/8"
Net Weight	0.9kg

Features

- High intensity green laser, for clearer display;
- Full rubber overmold housing, helping to protect major impact points;
- Smart Pendulum System, self levels and indicates out-of-level condition up to ±3° .

Accessories & Package

- Type-C Cable × 1 - Battery Pack × 2 - Plastic Case Packing

ADTX4V-0212D GREEN LASER LEVEL 4V



Approximately 6.5 hours of operation when the laser is fully activated

Fuction Code: 4V 1H

Power Supply	4V/5.2Ah
Laser Diode	515nm
Accuracy	±0.3mm/m
Auto-leveling Range	±3°
Width of Laser Line	4mm at distance of 10m
Operating Temperature	-10℃~40℃
Laser Class	3R
Tripod thread	1/4"
Net Weight	0.7kg

Features

- 3R level high intensity green laser, for clear display;
- Smart Pendulum System, self levels and indicates out-of-level condition up to ±3° ;
- Full rubber overmold housing, helping to protect major impact points.

Accessories & Package

- Type-C Cable × 1 - Battery Pack × 2 - Remote Control - Rotating Platform
- Lifting Platform - Threaded Adapter - Plastic Case Packing

ADTX4V-0212Q GREEN LASER LEVEL 4V



Approximately 6.5 hours of operation when the laser is fully activated

Fuction Code: 4V 1H

Power Supply	4V/5.2Ah
Laser Diode	515nm
Accuracy	±0.3mm/m
Auto-leveling Range	±3°
Width of Laser Line	4mm at distance of 10m
Operating Temperature	-10℃~40℃
Laser Class	3R
Tripod thread	1/4"
Net Weight	0.7kg

Features

- 3R level high intensity green laser, for clear display;
- Smart Pendulum System, self levels and indicates out-of-level condition up to ±3° ;
- Full rubber overmold housing, helping to protect major impact points.

Accessories & Package

- Type-C Cable × 1 - Battery Pack × 2 - Remote Control - Rotating Platform
- Lifting Platform - Threaded Adapter - Plastic Case Packing

ADTX4V-0216 GREEN LASER LEVEL 4V



Approximately 5 hours of operation when the laser is fully activated

Fuction Code: 4V 1H

Power Supply	4V/5.2Ah
Laser Diode	515nm
Accuracy	±0.3mm/m
Auto-leveling Range	±3°
Width of Laser Line	4mm at distance of 10m
Operating Temperature	-10℃~40℃
Laser Class	3R
Tripod thread	1/4"
Net Weight	0.73kg

Features

- 3R level high intensity green laser, for clear display;
- Smart Pendulum System, self levels and indicates out-of-level condition up to ±3° ;
- Full rubber overmold housing, helping to protect major impact points.

Accessories & Package

- Type-C Cable × 1 - Battery Pack × 2 - Remote Control - Rotating Platform
- Lifting Platform - Threaded Adapter - Plastic Case Packing

NO MORE SHAKING

HIGH INTENSITY GREEN LASER
For clear display

FULL RUBBER OVERMOLD HOUSING
Helping to protect major impact points

360 ° BIDIRECTIONAL FINE ADJUSTMENT BASE
Applicable to different scenarios



SMART PENDULUM SYSTEM
Self levels and indicates out-of-level condition up to ±3°

THICKENED ALUMINUM BASE
Sturdy and durable

ADTX4V-0211/0221/0241

GREEN LASER LEVEL

4V Lithium-Ion TYPE-C

*Specifications may differ from country to country.

NO MORE SHAKING

3R LEVEL HIGH INTENSITY GREEN LASER
For clear display

FULL RUBBER OVERMOLD HOUSING
Helping to protect major impact points

SMART PENDULUM SYSTEM
Self levels and indicates out-of-level condition up to ±3°



5.2AH LITHIUM BATTERY
Long life and long endurance time

REMOTE CONTROL
Convenient and efficient

ADTX4V-0212D/0212Q/0216

GREEN LASER LEVEL

4V Lithium-Ion TYPE-C

ADF07-50 LASER DISTANCE METER



Measuring Range	0.05-50m
Accuracy of Measurement	±(2+1×10⁻⁴D)mm
Laser Diode	630-670nm, P<1mW
Laser Class	2
Min. Display Unit	1mm
Auto Cut-off (without operation for)	150s
Battery lifetime (Individual Measurements)	8000times
Battery Specification	2x1.5V LR03
Working Temperature	0℃~+40℃
Storage Temperature	-20℃~+60℃
Product size	112x50x25mm
Net Weight	102g



Features

- 8–measurement mode, suitable for various scenarios;
- High–quality chip, high precision;
- Power–saving mode, auto shutdown;
- Long endurance time, up to 8,000 measurements per full charge.

Accessories & Package

- Lanyard - AAA Battery (2pcs) - Cloth Carrying Bag - Carton Packing

ADF07-70 LASER DISTANCE METER



Measuring Range	0.05-70m
Accuracy of Measurement	±(2+1×10⁻⁴D)mm
Laser Diode	630-670nm, P<1mW
Laser Class	2
Min. Display Unit	1mm
Auto Cut-off (without operation for)	150s
Battery lifetime (Individual Measurements)	8000times
Battery Specification	2x1.5V LR03
Working Temperature	0℃~+40℃
Storage Temperature	-20℃~+60℃
Product size	112x50x25mm
Net Weight	102g

Features

- 8–measurement mode, suitable for various scenarios;
- High–quality chip, high precision;
- Power–saving mode, auto shutdown;
- Long endurance time, up to 8,000 measurements per full charge.

Accessories & Package

- Lanyard - AAA Battery (2pcs) - Cloth Carrying Bag - Carton Packing

ADF07-100 LASER DISTANCE METER



Measuring Range	0.05-100m
Accuracy of Measurement	±(2+1×10⁻⁴D)mm
Laser Diode	630-670nm, P<1mW
Laser Class	2
Min. Display Unit	1mm
Auto Cut-off (without operation for)	150s
Battery lifetime (Individual Measurements)	8000times
Battery Specification	2x1.5V LR03
Working Temperature	0℃~+40℃
Storage Temperature	-20℃~+60℃
Product size	112x50x25mm
Net Weight	102g

Features

- 8–measurement mode, suitable for various scenarios;
- High–quality chip, high precision;
- Power–saving mode, auto shutdown;
- Long endurance time, up to 8,000 measurements per full charge.


Accessories & Package

- Lanyard - AAA Battery (2pcs) - Cloth Carrying Bag - Carton Packing

ADWL20/20B(TYPE Z) CORDLESS LED WORK LIGHT 20MAX V



Battery	20V MAX/Solo
Rated Power Input	30W
Color temperature	6500K
Net Weight	1.6kg

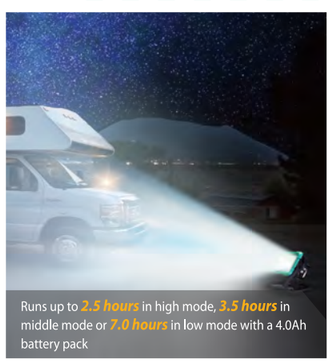

Features

- 3000LM max. brightness, to illuminate the working environment;
- AC/DC dual–purpose (Only ADWL20);
- 3–mode brightness adjustment, meeting different working requirements;
- Flexibility of use: hanging or sitting on the countertop, Widely use for various applications.

Accessories & Package

- ADWL20: AC/DC Adapter - Carton Packing
- ADWL20B: Carton Packing

*Specifications may differ from country to country.

ADWL2001(TYPE BDM/ADM/Z) CORDLESS LED WORK LIGHT 20MAX V



2500LM MAX. BRIGHTNESS
Illuminates the working environment

3-MODE BRIGHTNESS ADJUSTMENT
Meeting different working requirements



FLEXIBILITY OF USE: HANGING OR HANDHELD
Widely use for various applications

WITH FLICKERING MODE
Comfortable to hold

- (Type BDM) 4.0Ahx1, 2A Charger
  (Type ADM) 2.0Ahx1, 2A Charger
  (Type Z) Solo, Carton Packing

Battery	20V MAX/4.0Ah×1/2.0Ah×1/Solo
Rated Power	28/16/7W
Luminous Flux	2500/1700/800LM
Net Weight	1.3/1.1/0.7kg



Accessories & Package

- Carton Packing

ADWL4V-300G CORDLESS LED WORK LIGHT 4V



Battery Specification	4V/600mAh
Luminous Flux	150/300LM
Charging Input	DC 5V/1A
Operating Temperature	-10°C to +40°C
Net Weight	50g



Features

- Dual Light Sources: Main & Auxiliary Lights for Varied Lighting Needs;
- Long Battery Life: 2 hours runtime at High Mode (300 LM); 4 hours runtime at Low Mode (150 LM);
- Lightweight and Portable, Easy to Carry and Use;
- Strong Magnet: Built–in bottom magnet, sticks to metal surfaces for hands–free use;
- Type–C Fast Charging Port, Convenient Charging & Wide Compatibility.


Accessories & Package

- TYPE C Charging Cable - Carton Packing

ADWL4V-150T CORDLESS LED WORK LIGHT 4V



Luminous flux	40/150LM
Operating Temperature	-10°C to +40°C
Net Weight	65g

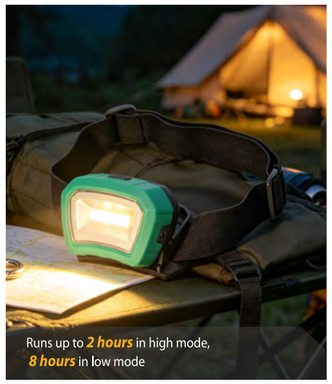

Features

- Long Runtime: 2 hours runtime on High Mode (150 LM); 8 hours runtime on Low Mode (40 LM);
- Multiple Light Modes: High / Working / Strobe, Suitable for Diverse Working Scenarios;
- Lightweight and Portable, Easy to Carry and Use.

Accessories & Package

- Carton Packing

ADWL4V-400T CORDLESS LED WORK LIGHT 4V



Battery Specification	4V/1500mAh
Luminous Flux	200/400LM
Charging Input	DC 5V/1A
Operating Temperature	-10°C to +40°C
Net Weight	110g



Features

- Long Runtime: 2 hours runtime on High Mode (400 LM); 6 hours runtime on Low Mode (200 LM);
- High/Low Mode Switchable, Adaptable to Diverse Working Scenarios;
- Lightweight and Portable, Easy to Carry and Use;
- Type–C Fast Charging Port, Convenient Charging & Wide Compatibility.

Accessories & Package

- TYPE C Charging Cable • Carton Packing

ADWL4V-500T CORDLESS LED WORK LIGHT 4V



Battery Specification	4V/1500mAh
Luminous Flux	120/250/300/500LM
Charging Input	DC 5V/1A
Operating Temperature	-10°C to +40°C
Net Weight	128g



Features

- Spotlight Low Mode: approx. 8h / 120LM, Spotlight High Mode: approx. 3h / 300LM, Floodlight Mode: approx. 3h / 250LM, Spotlight + Floodlight Mode: approx. 1.5h / 500LM;
- Spotlight / Floodlight / Sensor Modes Available, Adaptable for Diverse Working Scenarios;
- Lightweight and Portable, Easy to Carry and Use;
- Type–C Fast Charging Port, Convenient Charging & Wide Compatibility.

Accessories & Package


- TYPE C Charging Cable • Carton Packing

*Specifications may differ from country to country.

ADWL4V-1000G CORDLESS LED WORK LIGHT 4V



Battery Specification	4V/2600mAh
Luminous Flux	150/250/500/1000LM
Charging Input	DC 5V/1A
Operating Temperature	-10°C to +40°C
Net Weight	300g

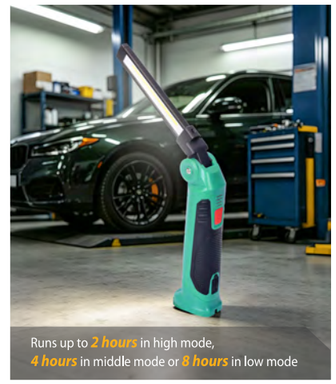

Features

- Spotlight Mode: approx. 7h / 150LM, Floodlight Low Mode: approx. 8h / 250LM, Floodlight Medium Mode: approx. 4h / 500LM, Floodlight High Mode: approx. 2h / 1000LM;
- Spotlight & 3–level Floodlight Modes, Suitable for Diverse Working Scenarios;
- All–Scenario Use: Strong Magnetic Base, 180° Rotatable Handle & Rigid Plastic Hook, Multi–Angle Mounting;
- Lightweight Portable Design, Fits Easily in Tool Bag;
- Type–C Fast Charging Port, Convenient.

Accessories & Package

- TYPE C Charging Cable • Carton Packing

ADWL4V-400G CORDLESS LED WORK LIGHT 4V



Battery Specification	4V/1500mAh
Luminous Flux	120/400LM
Charging Input	DC 5V/1A
Operating Temperature	-10°C to +40°C
Net Weight	166g



Features

- Long Runtime: High Mode: approx. 3h / 400LM; Low Mode: approx. 8h / 120LM;
- High/Low Mode Switchable for Diverse Working Scenarios;
- Lightweight and Portable, Easy to Carry and Use;
- Built–in Magnet, Sticks to Metal Surfaces, Hands–Free Operation;
- Type–C Fast Charging Port, Convenient Charging & Wide Compatibility.


Accessories & Package

- TYPE C Charging Cable • Carton Packing

ADWL4V-500G CORDLESS LED WORK LIGHT 4V



Battery Specification	4V/2600mAh
Luminous Flux	100/250/500LM
Charging Input	DC 5V/1A
Operating Temperature	-10°C to +40°C
Net Weight	217g

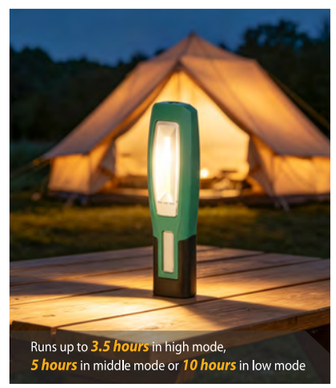

Features

- Long Runtime: Spotlight Mode: approx. 10h / 100LM, Floodlight Low Mode: approx. 5h / 250LM; Floodlight High Mode: approx. 3.5h / 500LM;
- Spotlight & Floodlight (High/Low) Modes, Adaptable to Diverse Working Scenarios;
- Lightweight and Portable, Easy to Carry and Use;
- Built–in Magnet, Attaches to Metal Surfaces for Hands–Free Work;
- Type–C Fast Charging Port, Convenient Charging & Wide Compatibility.

Accessories & Package

- TYPE C Charging Cable • Carton Packing

ADWL4V-150G CORDLESS LED WORK LIGHT 4V



Battery Specification	4V/800mAh
Luminous Flux	80/150LM
Charging Input	DC 5V/1A
Operating Temperature	-10°C to +40°C
Net Weight	62g



Features

- Long Runtime: Spotlight Mode: approx. 5h / 80LM, Floodlight Mode: approx. 3h / 150LM;
- Spotlight & Floodlight Modes, Suitable for Diverse Working Scenarios;
- Lightweight and Portable, Easy to Carry and Use;
- Built-in Magnet, Sticks to Metal Surfaces, Hands-Free Operation;
- Type-C Fast Charging Port, Convenient Charging & Wide Compatibility.

Accessories & Package

- TYPE C Charging Cable
- Carton Packing

ADCP20130B(TYPE AM/ADM/Z) CORDLESS TILE VIBRATION LEVELING MACHINE 20V MAX



ERGONOMIC HANDLE
For comfortable operation

MULTI-FREQUENCY VIBRATION
Quickly level the tiles

12-SPEED ADJUSTABLE VIBRATION

Φ130mm LARGE SUCTION CUP

- (Type AM) 2.0Ahx2, 2A Charger
  (Type ADM) 2.0Ahx1, 2A Charger
  (Type Z) Solo, Carton Packing

Battery	20V MAX/2.0Ah×2/2.0Ah×1/Solo
Max. Power Output	50W
Suction Cup Dia.	Φ130mm
No-load Speed	3300-9000/min
Vibrate Setting	12 gears
Net Weight	1.65/1.65/1.35kg



Accessories & Package

- Carton Packing

*Specifications may differ from country to country.

ADCP20190(TYPE BDM/AM/Z) CORDLESS TILE VIBRATION LEVELING MACHINE 20V MAX



Battery	20V MAX/4.0Ahx1/2.0Ahx2/Solo
Max. Power Output	70W
Suction Cup Dia.	Φ190mm
Vibrate Setting	12 gears
Net Weight	2.6/2.3/2.0kg



- (Type BDM) 4.0Ahx1, 2A Charger
  (Type AM) 2.0Ahx2, 2A Charger
  (Type Z) Solo, Carton Packing

Features

- Multi-frequency vibration, quickly level the tiles;
- Φ190mm large suction cup, delivering 100kg suction power;
- 12-gear vibration adjustment, meeting different working conditions;
- Digital display, real-time monitoring of vibration gear.

Accessories & Package

- Carton Packing

ADVC800(TYPE DM/Z) CORDLESS BRUSHLESS VACUUM CLEANER 20V MAX



Battery	20V MAX/4.0Ahx1/Solo
Max. Power output	200W
Capacity	8L(water: 3L)
Max. Vacuum Pressure	16kPa
Net Weight	3.2/2.6kg



- (Type DM) 4.0Ahx1, 2A Charger
  (Type Z) Solo, Carton Packing

Features

- 16kPa Max. vacuum pressure, for powerful suction;
- HEPA filter, for 99.97% dust filtration rate;
- 2-speed control, meeting different working conditions;
- Intelligent water fullness monitoring and automatic shutdown, to protect the machine.

Accessories & Package

- Flexible Pipe
- Shoulder Strap
- Wide Suction Nozzle
- Flat Suction Nozzle
- Flexible Tube Holder
- Carton Packing

ADQW2035(TYPE BDM/Z) CORDLESS BRUSHLESS HIGH-PRESSURE WASHER 20V MAX



Battery	20V MAX/4.0Ahx1/Solo
Rated Power Input	260W
Max. Pressure	35bar/508psi
Rated pressure	24bar/348psi
Rated Flow	3L/min/0.8gpm
Net Weight	2.0/1.4kg



- (Type BDM) 4.0Ahx1, 2A Charger
  (Type Z) Solo, Carton Packing

Features

- 260W brushless motor, for efficient washing;
- Dual-piston water pump, for continuous flow output;
- 2-gear adjustment, meeting different washing requirement;
- Four finger trigger switch, convenient to operate.

Accessories & Package


- Soap Bottle Assembly
- Inlet Pipe Assembly
- Five-in-one Nozzle Assembly
- Carton Packing

ADYD02-35(TYPE AM/Z) CORDLESS BRUSHLESS PRUNER 20MAX V



- (Type AM) 2.0Ahx2, 2A Charger
  (Type Z) Solo, Carton Packing

Battery		20V MAX/2.0Ah×2/Solo
Max. Power Output		400W
Shearing Capacity		
1st gear	Hard Branches	Φ20mm
	Soft Branches	Φ20mm
2nd gear	Hard Branches	Φ25mm
	Soft Branches	Φ25mm
3rd gear	Hard Branches	Φ25mm
	Soft Branches	Φ30mm
4th gear	Hard Branches	Φ25mm
	Soft Branches	Φ35mm
Net Weight		1.3/1.0kg

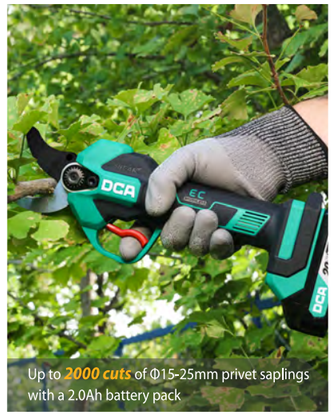

Features

- Brushless motor, powerful and efficient;
- SK5 steel blade and teflon coating process, sharp and durable, non-stick and wear resistant;
- Dual safety switch, preventing accidental start;
- 4-gear shearing capacity setting, applicable to different working conditions.

Accessories & Package

- Wrench 13mm • Hex Wrench 5mm • Whetstone • Lubricating oil • Blade Guard • Carton Packing

ADPR20352(TYPE AM/Z) CORDLESS BRUSHLESS PRUNER 20MAX V



BRUSHLESS MOTOR
Powerful and efficient

4-GEAR SHEARING CAPACITY SETTING
Applicable to different working conditions

SK5 STEEL BLADE AND TEFLON COATING PROCESS
Sharp and durable, non-stick and wear resistant

DUAL SAFETY SWITCH
Preventing accidental start

- (Type AM) 2.0Ahx2, 2A Charger (Type Z) Solo, Carton Packing

Battery		20V MAX/2.0Ah×2/Solo
Max. Power Output		450W
Shearing Capacity		
1st gear	Hard Branches	Φ20mm
	Soft Branches	Φ20mm
2nd gear	Hard Branches	Φ25mm
	Soft Branches	Φ25mm
3rd gear	Hard Branches	Φ25mm
	Soft Branches	Φ30mm
4th gear	Hard Branches	Φ25mm
	Soft Branches	Φ35mm
Net Weight		1.3/1.0kg



Accessories & Package

- Wrench 13mm • Hex Wrench 5mm • Whetstone • Lubricating Oil • Blade Guard • Carton Packing

*Specifications may differ from country to country.

ADEP100 TELESCOPIC EXTENSION POLE 20MAX V



Battery	20V Max/Solo
Adjustable Cutting Angle	90°
Length	1.4-2.0m
Net Weight	1.3kg



- Suitable for cordless pruning saw: ADCS20062-2/ ADCS20084-2
  Suitable for cordless pruner: ADPR20351

Features

- Extends from 1.4m to 2.0m;
- 90° Adjustable cutting angle;
- Aluminum pole;
- Equipped with the shoulder strap.

Accessories & Package

- Shoulder Strap • Carton Packing

ADCS20062-2(TYPE FK/BM/Z) CORDLESS BRUSHLESS PRUNING SAW 20MAX V



AUTOMATIC OIL PUMPING SYSTEM
Effectively extending the lifetime of chain

700W POWERFUL BRUSHLESS MOTOR
High efficiency, powerful and durable

PROTECTIVE COVER DESIGN
To blocking sawdust and protect users

1.7kg LIGHT-WEIGHT AND ULTRA-COMPACT BODY (WITH A 4.0Ah BATTERY)
For comfortable operation

- (Type FK) 5.0Ahx2, 4A Charger (Type BM) 4.0Ahx2, 2A Charger
  (Type Z) Solo, Carton Packing

Battery	20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output	700W
No-load Speed	7.5m/s
Max. Length of Guide bar	150mm (6")
Net Weight	1.7/1.7/1.1kg



Accessories & Package

- Hex Wrench • Oil Bottle • Saw Chain • Guide Bar • Bar Protector • Carton Packing

ADCS20084-2(TYPE FK/BM/Z) CORDLESS BRUSHLESS PRUNING SAW 20MAX V



Battery	20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output	700W
No-load Speed	7.5m/s
Max. Length of Guide Bar	200mm (8")
Net Weight	1.8/1.8/1.2kg

● (Type FK) 5.0Ahx2, 4A Charger
(Type BM) 4.0Ahx1, 2A Charger (Type Z) Solo, Carton Packing



Features

- 700W powerful brushless motor, high efficiency, powerful and durable;
- 1.8kg light–weight and Ultra–compact body (with a 4.0Ah battery), for comfortable operation;
- Automatic oil pumping system, effectively extending the lifetime of chain;
- Protective cover design, to blocking sawdust and protect users.

Accessories & Package

- Hex Wrench - Oil Bottle - Saw Chain - Guide Bar - Bar Protector - Carton Packing

ADCS20101(TYPE FK/BM/Z) CORDLESS BRUSHLESS CHAIN SAW 20MAX V



Battery	20V MAX/5.0Ah×2/4.0Ah×2/ Solo
Max. Power Output	900W
No-load Speed	12m/s
Max. Length of Guide Bar	250mm(10")
Net Weight	2.6/2.6/2.0kg

● (Type FK) 5.0Ahx2, 4A Charger
(Type BM) 4.0Ahx2, 2A Charger
(Type Z) Solo, Carton Packing



Features

- 900W powerful brushless motor;
- 12m/s high chain speed, for efficient and smooth cutting;
- Automatic oil pumping system, effectively extending the lifetime of the chain;
- Tool–free saw chain tensioning, for convenient operation and maintenance.

Accessories & Package

- Oil Bottle Assembly - Saw Chain - Guide Bar - Bar Protector - Carton Packing

ADCS20121(TYPE FK/BM/Z) CORDLESS BRUSHLESS CHAIN SAW 20MAX V



Battery	20V MAX/5.0Ah×2/4.0Ah×2/Solo
Max. Power Output	900W
No-load Speed	12m/s
Max. Length of Guide Bar	300mm(12")
Net Weight	2.7/2.7/2.1kg

● (Type FK) 5.0Ahx2, 4A Charger
(Type BM) 4.0Ahx2, 2A Charger
(Type Z) Solo, Carton Packing



Features

- 900W powerful brushless motor;
- 12m/s high chain speed, for efficient and smooth cutting;
- Automatic oil pumping system, effectively extending the lifetime of the chain;
- Tool–free saw chain tensioning, for convenient operation and maintenance.

Accessories & Package

- Oil Bottle Assembly - Saw Chain - Guide Bar - Bar Protector - Carton Packing

ADQF1213(TYPE BK/Z) CORDLESS BRUSHLESS DUST BLOWER 12MAX V



STRONG WIND
130,000 rpm high-speed brushless motor, more powerful dust removal

FULL-FUNCTIONALITY
Press the trigger twice quickly for the long breeze mode, and lock the switch to prevent accidental activation

LIGHTWEIGHT BODY
For more effortless operation

● (Type BK) 2.0Ahx2 ,3A Charger
(Type Z) Solo, Carton Packing

Battery	12V MAX/2.0Ahx2/Solo
Rated Power Input	240W
No-load Speed	130000/min
Max Air Volume	1.3m³/min
Net Weight	0.46/0.28kg



Accessories & Package


- Cylindrical Nozzle - Clamp Valve Nozzle - Tool Carrying Bag (Except Type Z)
- Carton Packing

ADQF20V-32(TYPE BM/BDM/Z) CORDLESS BRUSHLESS BLOWER 20MAX V



Battery		20V MAX/4.0Ah×2/4.0Ah×1/Solo
Max. Power Output		380W
No-load Speed	Low	11000/min
	Middle	15000/min
	High	18000/min
Air Volume	Low	67CFM(1.9m³/min)
	Middle	92CFM(2.6m³/min)
	High	110CFM(3.11m³/min)
Net Weight		1.9/1.9/1.3kg

● (Type BM) 4.0Ahx2, 2A Charger
(Type BDM) 4.0Ahx1, 2A Charger
(Type Z) Solo, Carton Packing

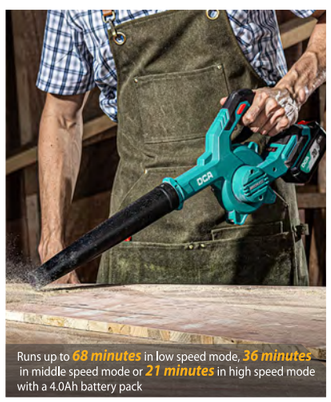

Features

- Brushless outer rotor motor, powerful and durable;
- 1.9kg compact and lightweight design (with a 4.0Ah battery);
- Two functions: blowing and vacuuming;
- 3–speed variable speed control, meeting different working conditions.

Accessories & Package

- Blowpipe - Dust Bag - Dust Extraction Connector - Carton Packing

ADLB20093(TYPE FK/BM/Z) CORDLESS BRUSHLESS BLOWER 20V MAX



Battery	20V MAX/5.0Ahx2/4.0Ahx2/Solo
Max. Power Output	360W
Max. Air Speed	58m/s(tapered Nozzle)
	48m/s(nomal)
Max. Air Volume	325CFM(550m³/h)
Net Weight	1.3/1.3/0.7kg

- (Type FK) 5.0Ahx2, 4A Charger
  (Type BM) 4.0Ahx2, 2A Charger
  (Type Z) Solo, Carton Packing

Features


- Brushless outer rotor motor, high efficiency, powerful and durable;
- 58m/s Max. air speed (with Tapered Nozzle);
- Static Strip Design, effectively eliminates static electricity to prevent static shocks;
- 1.3kg lightweight design, for effortless operation (with a 4.0Ah battery pack).

Accessories & Package

- Blower Tube - Tapered Nozzle - Carton Packing



ADLB20142(TYPE FDK/BM/Z) CORDLESS BRUSHLESS BLOWER 20V MAX



Battery	20V MAX/5.0Ahx1/4.0Ahx2/Solo
Max. Power Output	400W
Max. Air Speed	54m/s
Max. Air Volume	480CFM(13.7m³/min)
Net Weight	2.1/2.1/1.5kg


- (Type FDK) 5.0Ahx1, 4A Charger
  (Type BM) 4.0Ahx2, 2A Charger
  (Type Z) Solo, Carton Packing

Features

- Brushless outer rotor motor, high efficiency, powerful and durable;
- 2.1kg lightweight design (with a 4.0Ah battery), for effortless operation;
- Variable speed, for variety of cleaning tasks;
- 38m/s Max. air speed.

Accessories & Package

- Tapered Nozzle - Carton Packing

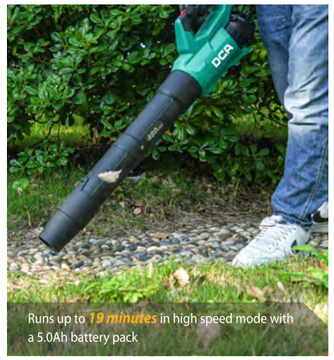

ADST20141(TYPE HK/FDK/Z) CORDLESS BRUSHLESS STRING TRIMMER 20V MAX



Battery	20V MAX/6.0Ahx1/5.0Ahx1/Solo	
Max. Power Output		500W
No-load Speed	Low	4600/min
	High	6000/min
Trimming Range		300/350mm
Net Weight		3.6/3.3/2.7kg


- (Type HK) 6.0Ahx1, 4A Charger (Battery packs sold separately)
  (Type FDK) 5.0Ahx1, 4A Charger
  (Type Z) Solo, Carton Packing

Features

- Brushless outer rotor motor, high efficiency, powerful and durable;
- 3.3kg lightweight design (with a 5.0Ah battery pack);
- 2-speed adjustment, for excellent power control and runtime management.

Accessories & Package

- Carton Packing

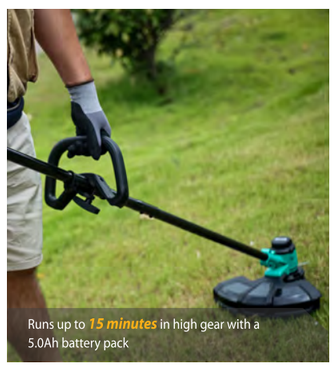

*Specifications may differ from country to country.

ADHT20222(TYPE BDM/AM/Z) CORDLESS HEDGE TRIMMER 20V MAX



Battery	20V MAX/4.0Ahx1/2.0Ahx2/Solo
Max. Power Output	300W
Strokes Per Minute	2800/min
Max. Cutting length	550mm
Max. Cutting Diameter	19mm
Net Weight	2.8/2.6/2.2kg


- (Type BDM) 4.0Ahx1, 2A Charger
  (Type AM) 2.0Ahx2, 2A Charger
  (Type Z) Solo, Carton Packing

Features

- 2.8kg lightweight design (with a 4.0Ah battery pack), for effortless operation;
- High-quality motor, efficient and durable;
- Multiple safety protections, for safe and secure startup.

Accessories & Package

- Scabbard - Carton Packing

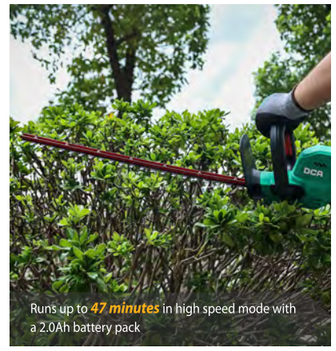

ADGS20083(TYPE AM/Z) CORDLESS GRASS SHEAR & SHRUB TRIMMER 20V MAX



Battery	20V MAX/2.0Ahx2/Solo
Max. Power Output	40W
No-load Speed	1200/min
Max. Cutting Width (Grass Shear)	100mm(4 ")
Max. Cutting Length (Shrub Trimmer)	200mm(8")
Net Weight (Grass Shear)	1.0/0.7kg

- (Type AM) 2.0Ahx2, 2A Charger
  (Type Z) Solo, Carton Packing

Features

- Tool-free quick-change blade system;
- 1.0kg lightweight design (with a 2.0Ah battery);
- Three-position adjustment (0° /15 ° /30°);
- Laser cutting blade.

Accessories & Package

- Shrub Trimmer Blade - Carton Packing



ADQU160(TYPE H2K/FK/BM/Z) CORDLESS BRUSHLESS MIXER 20V MAX



Battery	20V MAX/6.0Ah×2/5.0Ah×2/ 4.0Ah×2/Solo	
Max. Power Output		360W
No-load Speed	1st gear	0-450/min
	2nd gear	0-700/min
Stirring Paddle Dia.		120mm
Stirring Paddle Thread Dia.		M14
Net Weight		4.2/4.0/4.0/3.6kg

- (Type H2K) 6.0Ahx2, 4A Charger (Battery packs sold separately)
  (Type FK) 5.0Ahx2, 4A Charger (Type BM) 4.0Ahx2, 2A Charger
  (Type Z) Solo, Carton Packing

Features

- Brushless motor, High-efficiency, powerful and durable;
- Ergonomic dual handle, comfortable to hold;
- Mechanical 2-speed control;
- 6-speed adjustment, applicable to different working conditions.

Accessories & Package

- Stirring Paddle Assembly (Individually packaged) - Carton Packing



ADQR32(TYPE BM/Z) CORDLESS PPR FUSION WELDER 20V MAX



Battery	20V MAX/4.0Ah×2/Solo
Maximum Heating Temperature	320℃
Maximum Output Power	300W
Second Startup Temperature Difference	40℃
Net Weight	1.1/1.1kg

● (Type BM) 4.0Ahx2, 2A Charger
(Type Z) Solo, Carton Packing



Features

- Digital display: Adjust 0–320℃ at will, display real–time temperature;
- Double–tube heating: Heats up quickly. Fusion welding can be completed about 10s;
- Wide application: can be used to weld pipes like PPR, PB, PE, PV, plastic and other materials;
- Welding up to 50pcs Φ25mm PVC pipes on one 4.0Ah battery charge.

Accessories & Package

- Metal mould (3pcs: Φ20, Φ25, Φ32) - Hex Socket Screw (3pcs) - Wrench - Carton Packing

ADFS240/240B(TYPE Z) CORDLESS FAN 20V MAX



Battery		20V MAX/Solo
Rated Power		20W
No-load Speed		
	Low	1500/min
	High	2250/min
Blade Dia.		240mm
Net Weight		2.3kg

● (Type Z) Solo



Features

- 240mm large diameter blade, for high airflow;
- 360° ratatable fan head, to match various applications;
- 2–speed adjustment, meeting different working conditions;
- AC & DC Dual Use, for various usage scenarios. (Only ADFS240)

Accessories & Package

- ADFS240: AC/DC Adapter, Carton Packing
- ADFS240B: Carton Packing

ADPM50(TYPE EK/Z) CORDLESS BLIND RIVETING GUN 12V MAX



Battery	12V MAX/2.0Ah×2/Solo
Max. Power Output	150W
Stroke	20mm
Capacity	Φ2.4-5.0mm For All-purpose
	Φ2.4-6.0mm For Aluminum Blind Rivet
	Pull the nail fast
Max. Tension	10000N
Net Weight	1.6/1.4kg

● (Type EK) 2.0Ahx2, 3A Charger
(Type Z) Solo, Carton Packing



Features

- 20 mm stroke length, riveting in one stroke;
- Mandrel collector, convenient collection and improved work efficiency;
- Build–in battery indicator, increased user convenience;
- Metal gun head design, sturdy and durable;
- Efficient heat dissipation air vents, effectively extending the lifetime of product.

Accessories & Package

- Nosepiece (5pcs) - Mandrel Part - Magnetic Ring - Wrench - Plastic Case Packing (Except Type Z)


*Specifications may differ from country to country.

ADPJ12(TYPE EK/Z) CORDLESS CAULK GUN 12V MAX



Battery	12V MAX/2.0Ah×2/Solo
Max. Power Output	150W
Max.Pushing Force	3400N
Feed Speed	0-12.9mm/s
Stroke	213/355mm
Sealant Type	Cartridge 300ml
Film Type Pack	600ml
Net Weight	1.85/1.65kg

● (Type EK) 2.0Ahx2, 3A Charger
(Type Z) Solo, Carton Packing

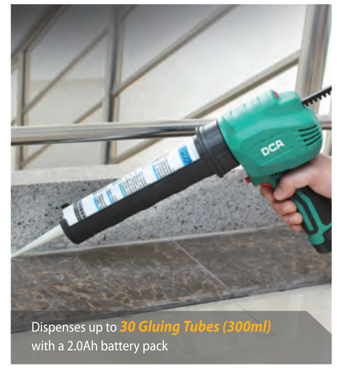

Features

- 6–speed adjustment, meeting different working requirements;
- Powerful motor, delivering up to 3400N of pushing force;
- 360° rotatable cartridge holder fits 300 ml cartridges;
- Stepless speed trigger switch, optimizes flow rate from 0–12.9mm/s.

Accessories & Package


- 600mL Sealant Pipe Holder (Only Type EK) - Suspension Strap - Plastic Case Packing (Except Type Z)

ADCX600(TYPE BM/Z) CORDLESS BRUSHLESS WIRE MACHINE 20V MAX



Battery	20V MAX/4.0Ah×2/Solo
Max. Power Output	800W
No-load Speed	0-40m/min
Pull Force	600N
Net Weight	7.0/6.4kg

● (Type BM) 4.0Ahx2, 2A Charger (Type Z) Solo, Carton Packing

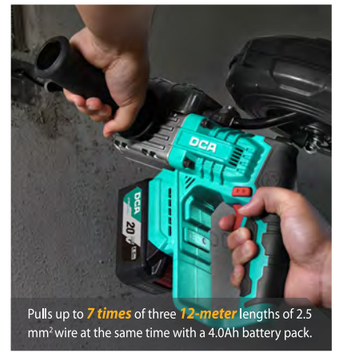

Features

- Brushless motor, high–efficiency, powerful and durable;
- Intelligent control, reverse pull self–stop;
- Rubberized handle, comfortable to hold;
- Enclosed lead wire box for up to 20m of lead wire.

Accessories & Package

- Suspension Strap - Auxiliary Handle - Lubricant Oil Bottle - Socket Wrench - Tool Carrying Bag - Tool Kit(1 set) - Carton Packing

ADGG500(TYPE DM/Z) CORDLESS GREASE GUN 20V MAX



Battery		20V MAX/2.0Ah×1/Solo
Max. Power Output		260W
Max. Working Pressure		10000PSI
Oil Injection Rate	High gear	170g/min
	Low gear	110g/min
Length of Hose		1000mm
Tank Capacity		500cc
Net Weight		3.6/3.2kg

● (Type DM) 2.0Ahx1, 2A Charger
(Type Z) Solo, Carton Packing



Features

- 10000PSI high pressure grease injection, powerful performance with effortless operation;
- 500cc large capacity oil tank;
- LCD display, intuitive display of working status;
- 2–speed control, meeting different working conditions.

Accessories & Package

- Suspension Strap - Plastic Case Packing(Except Z)

ADGG20600(TYPE BDM/Z) CORDLESS BRUSHLESS GREASE GUN 20MAX V



Max. Power Output	80W
Instant Maximum Working Pressure	10000psi
Continuous Maximum Working Pressure	6000psi
Oil Injection Rate	High gear 150-180g/min
Length of Hose	1000mm
Tank Capacity	600cc
Net Weight	2.7/2.1kg

● (Type BDM) 4.0Ahx1, 2A Charger
(Type Z) Solo, Carton Packing



Features

- Rubberized handle,comfortable to hold;
- LED light for lighting in dark areas;
- Large capacity, less refilling & higher efficiency;
- Brushless motor, powerful for fast grease injection.

Accessories & Package

- Grease Hose - Straight Grease Tube - Needle Nozzle - Flat Nozzle - Carton Packing

ADXP0401 CORDLESS SUCTION CUP 4V



Battery	4V
Max. Power Output	3W
Suction cup Dia.	248×160mm
Maximum vertical load-bearing capacity	200kg
Maximum horizontal load-bearing capacity	120kg
Net Weight	1.4kg



Features

- Smart display with real-time pressure detection & auto air refilling;
- Multi-scene application for tile, glass, stone, metal and wood;
- Strong anti-slip suction, works on slight rough surfaces & washable;
- 248 × 160mm elliptical base, max vertical load up to 200kg.


Accessories & Package

- Suspension Strap - Plastic Case Packing(Except Z)

ADQE03-150(TYPE ED) CORDLESS AIR PUMP 8V



Battery	8V MAX/2.0Ah
Max. Power Output	60W
Max. Pressure	10.3bar/150psi
Sensor Accuracy	± 1psi
Net Weight	0.45kg

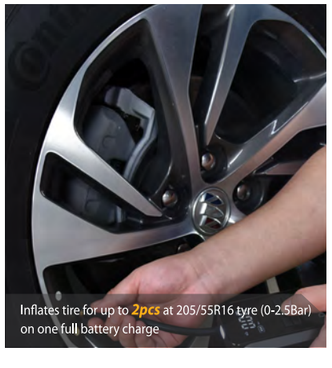

Features

- 0.45kg lightweight and compact design, convenient storage and portability;
- 4 standard scene modes+4 unit custom modes, easy to operate;
- Intelligent pressure measurement, smart auto-stop to prevent over-inflation;
- Built-in LED light, for working in dark.

Accessories & Package

- Type-C Cable - Ball Needle - Adaptor - Storage Bag - Carton Packing

*Specifications may differ from country to country.

ADQE120(TYPE DK/Z) CORDLESS AIR PUMP 12MAX V



Battery	12V MAX/2.0Ah×1/Solo
Max. Power Output	90W
No-load Speed	13000/min
Max. Air Pressure	8.3bar/120psi
Net Weight	1.05/0.85kg

● (Type DK) 2.0Ahx1, 3A Charger
(Type Z) Solo, Carton Packing



Features

- Compact body, convenient to carry;
- Intelligent digital display, real-time monitoring of air pressure;
- Air nozzle storage area;
- LED light, convenient to use in dark environment.

Accessories & Package

- Ball Needle - Plastic Air Nozzle - Adaptor - Carton Packing

ADQE20145(TYPE EDM/Z) CORDLESS BRUSHLESS AIR PUMP 20MAX V



Battery	20V MAX/4.0Ah×1/Solo
Max. Power Output	500W
No-load Speed	24000/min
Max. Air Pressure	145psi
Max. Air Flow	88L/min
Net Weight	2.6/2.0kg

● (Type EDM) 4.0Ahx1, 2A Charger
(Type Z) Solo, Carton Packing



Features

- Outer rotor brushless motor, high power & fast inflation;
- One-touch preset: car / motorcycle / bike / basketball;
- Reinforced alloy pump, max 145Psi pressure;
- High-bright LED light, long range lighting, SOS & flash function.

Accessories & Package


- Air Nozzle(4pcs) - Hose Assembly - Explosion-proof Adapter Assembly - Suspension Strap - Plastic Case Packing

ADCN100(TYPE FDK/EM/EDM/Z) CORDLESS BRUSHLESS CONCRETE NAILER 20MAX V



Battery	20V MAX/5.0Ah×1/4.0Ah×2/4.0Ah×1/Solo	
Max. Power Output		800W
Energy		100J
Nailing Frequency		2pcs/s
Capacity of Magazine		33pcs
Nail Size	Nail Length	15-40mm
	Nail Dia.	Φ2.6~3.0mm
	Nail Head	＜Φ6.6mm
Working Temperture		-20~50°C
Concrete Type		C45
Net Weight		4.8/4.8/4.8/4.2kg

● (Type FDK) 5.0Ahx1, 4A Charger
(Type EM) 4.0Ahx2, 2A Charger
(Type EDM) 4.0Ahx1, 2A Charger (Type Z) Solo, Carton Packing

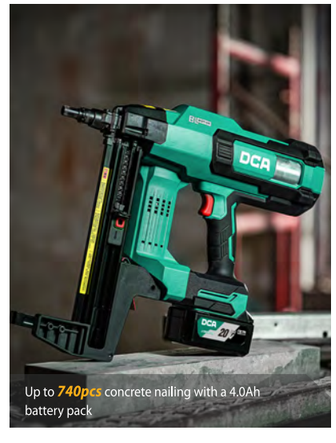


Features

- Adjustable nose piece, for variable nail depth;
- Multiple interchangeable nose pieces, for diverse applications;
- High speed firing: approx. 120 nails/min;
- Anti dry-fire design, automatic protection when out of nails.

Accessories & Package

- Tool Bag - Suspension Strap - Nail Nozzle(4pcs) - Support Frame - Coil Spring - Flat Washer - Hex Head Bolt(M5 × 10)(2pcs)
- Hex Head Bolt(M5 × 16)(2pcs) - Hex Head Bolt(M5 × 25)(1pc) - Plastic Case Packing

LIST OF CORDLESS COMBO KIT SERIES



Mode	Product	Voltage	Battery	charger	Package
AK20V226-1(TYPE EK)	ADJZ2060i/ADPL208	20V MAX	4.0Ah×2	4A Charger	D-STACK Stacking Box
AK20V226-1(TYPE AM)	ADJZ2060i/ADPL208	20V MAX	2.0Ah×2	2A Charger	D-STACK Stacking Box
AK20V233(TYPE EK)	ADPL208/ADSM06-100	20V MAX	4.0Ah×2	4A Charger	D-STACK Stacking Box
AK20V233-01(TYPE EK)	ADPL208/ADSM06-115	20V MAX	4.0Ah×2	4A Charger	D-STACK Stacking Box
AK12V236-1(TYPE BK)	ADPL04-8/ADJZ1250	12V MAX	2.0Ah×2	3A Charger	Tool Carrying Bag Carton Packing
AK20V342-02(TYPE BK)	ADJZ2060i/ ADPB488/ADSM03-125	20V MAX	4.0Ah×2	4A Charger	Tool Carrying Bag Carton Packing
AK20V343-1(TYPE BK)	ADPL20V-206/ ADJZ2060i/ADPB488	20V MAX	4.0Ah×2	4A Charger	Tool Carrying Bag Carton Packing
AK20V247-1(TYPE BK)	ADJZ2060i/ADMQ85	20V MAX	4.0Ah×2	4A Charger	Tool Carrying Bag Carton Packing
AK20V249-1(TYPE BK)	ADJZ2060i/ADMP6	20V MAX	4.0Ah×2	4A Charger	Tool Carrying Bag Carton Packing
AK20V253(TYPE FK)	ADSM04-100/ADJZ03-13	20V MAX	5.0Ah×2	4A Charger	Tool Carrying Bag Carton Packing
AK20V253-01(TYPE FK)	ADSM04-115/ADJZ03-13	20V MAX	5.0Ah×2	4A Charger	Tool Carrying Bag Carton Packing
AK20V253-02(TYPE FK)	ADSM04-125/ADJZ03-13	20V MAX	5.0Ah×2	4A Charger	Tool Carrying Bag Carton Packing
AK20V254-1(TYPE EK)	ADPB320/ADJZ2055i	20V MAX	4.0Ah×2	4A Charger	D-STACK Stacking Box
AK12V255-1(TYPE EK)	ADPL04-8/ADJZ1250i	12V MAX	2.0Ah×2	3A Charger	D-STACK Stacking Box
AK12V255-1(TYPE BK)	ADPL04-8/ADJZ1250i	12V MAX	2.0Ah×2	3A Charger	Tool Carrying Bag Carton Packing
AK20V356-02(TYPE BK)	ADZC04-24/ ADJZ03-13/ADSM03-125	20V MAX	4.0Ah×2	4A Charger	Tool Carrying Bag Carton Packing

Mode	Product	Voltage	Battery	charger	Package
AK20V358-1(TYPE BK)	ADJZ2060i/ ADMQ85/ADMY02-185	20V MAX	4.0Ah×2	4A Charger	Tool Carrying Bag Carton Packing
AK20V367-01(TYPE EK)	ADZC04-24/ ADSM06-115/ADJZ2055i	20V MAX	4.0Ah×2	4A Charger	D-STACK Stacking Box
AK20V2102-02(TYPE BK)	ADSM06-125/ADZC05-26	20V MAX	4.0Ah×2	4A Charger	Tool Carrying Bag Carton Packing
AK20V2103(TYPE BK)	ADZC04-24/ADSM06-100	20V MAX	4.0Ah×2	4A Charger	Tool Carrying Bag Carton Packing
AK20V2103-02(TYPE BK)	ADZC04-24/ADSM06-125	20V MAX	4.0Ah×2	4A Charger	Tool Carrying Bag Carton Packing
AK20V3104(TYPE BK)	ADZC04-24/ ADJZ2060i/ADSM06-100	20V MAX	4.0Ah×2	4A Charger	Tool Carrying Bag Carton Packing
AK20V3104-02(TYPE BK)	ADZC04-24/ ADJZ2060i/ADSM06-125	20V MAX	4.0Ah×2	4A Charger	Tool Carrying Bag Carton Packing
AK20V5105-02(TYPE E1F1K)	ADSM06-125/ ADZC04-24/ADJZ2060i/ ADPB320/ADPL20V-206	20V MAX	4.0Ah×1/ 5.0Ah×1	4A Charger	Tool Carrying Bag Carton Packing
AK20V5106(TYPE BK)	ADZC04-24/ ADJZ2060i/ADPB520/ ADPL20V-206/ADSM06-100	20V MAX	4.0Ah×2	4A Charger	Tool Carrying Bag Carton Packing
AK20V2109-01(TYPE BK)	ADSM06-115/ADJZ03-13	20V MAX	4.0Ah×2	4A Charger	Tool Carrying Bag Carton Packing
AK20V3110-01(TYPE BK)	ADZC04-24/ ADSM06-115/ADJZ03-13	20V MAX	4.0Ah×2	4A Charger	Tool Carrying Bag Carton Packing
AK20V3111-01(TYPE BK)	ADPB488/ ADSM06-115/ADJZ03-13	20V MAX	4.0Ah×2	4A Charger	Tool Carrying Bag Carton Packing
AK20V2118-01(TYPE EK)	ADSM06-115/ADPL20V-206	20V MAX	4.0Ah×2	4A Charger	D-STACK Stacking Box
AK20V2118-02(TYPE EK)	ADSM06-125/ADPL20V-206	20V MAX	4.0Ah×2	4A Charger	D-STACK Stacking Box
AK20V3122-01(TYPE BK)	ADZC05-26/ ADSM06-115/ADJZ2060i	20V MAX	4.0Ah×2	4A Charger	Tool Carrying Bag Carton Packing
AK20V5123-01(TYPE E1F1K)	ADSM06-115/ ADZC05-26/ADJZ2060i/ ADPB320/ADWL2001	20V MAX	4.0Ah×1/ 5.0Ah×1	4A Charger	Rolling Rigid Tool Bag Carton Packing

*The data comes from DongCheng Laboratory approved by CNAS/TUV,etc.The data is for reference only.

AK12V236-1(TYPE BK) CORDLESS BRUSHLESS COMBO KIT 12MAX V

EC BRUSHLESS





ADPL04-8

·Brushless motor, delivering up to 140N.m of torque;
·125mm compact body, perfect control in narrow space.



ADJZ1250

·Brushless motor, delivering up to 50N.m of torque;
·2-speed adjustment, 0-500/0-1800/min,
high torque for screw driving, high speed for drilling.

Accessories & Package

• 12VMAX Lithium–Ion battery 2.0Ah × 2 • 3A Charger • Driver Bit(2pcs)
• Belt Clip(2pcs) • Tool Carrying Bag • Carton Packing

AK20V342-02(TYPE BK) CORDLESS BRUSHLESS COMBO KIT 20MAX V

EC BRUSHLESS

NEW





ADSM03-125

·630W Brushless Motor;
·2-motion slide switch, convenient and safe to operate.



ADJZ2060i

·2-speed adjustment, high torque for screw driving, high speed for drilling;
·13mm (1/2") ratchet metal chuck, sturdy and durable.



ADPB488

·Brushless motor, delivering up to 488N.m fastening torque;
·Smart-loosen mode, preventing nuts from dropping down accidentally.

Accessories & Package

• 20MAX Lithium–Ion Battery 4.0Ah × 2 • 4A Charger • Auxiliary Handle (Angle grinder)
• Wrench • Wheel Guard • Flap Discs (1 pcs) • Cut off Wheel (3 pcs) • Grinding Wheel (1 pcs)
• Sockets Assembly (S22) • Driver Bit • Belt Clip (2 pcs) • Knitted and PVC Dots Gloves (1pcs)
• Tool Carrying Bag • Carton Packing

AK20V249-1(TYPE BK) CORDLESS BRUSHLESS COMBO KIT 20MAX V





ADJZ2060i

·Brushless motor, delivering up to 60N.m of torque;
·152mm compact body, perfect control in narrow space.



ADMP6

·Brushless motor;
·6 Speed electronic constant speed control.

Accessories & Package

• 20MAX Lithium–Ion battery 4.0Ah × 2 • 4A Charger • Driver Bit • Belt Clip • Wrench (3pcs)
• Straight Guide • Templet Guide • Trimmer Guide Assembly • Dust Cap • Tool Carrying Bag
• Knitted and PVC Dots Gloves • Carton Packing

*Specifications may differ from country to country.

AK20V254-1(TYPE EK) CORDLESS BRUSHLESS COMBO KIT 20MAX V

EC BRUSHLESS





ADPB320

·Brushless motor, delivering up to 320N.m fastening torque;
·2-speed control, applicable to different working conditions.



ADJZ2055i

·Brushless motor, delivering up to 55N.m of torque;
·18+2 torque setting, for a variety of applications.

Accessories & Package

• 20VMAX Lithium–Ion battery 4.0Ah × 2 • 4A Charger • Driver Bit • Belt Clip(2pcs)
• Sockets Assembly(S22) • D–STACK Stacking Box

AK12V255-1(TYPE EK) CORDLESS BRUSHLESS COMBO KIT 12MAX V

EC BRUSHLESS

NEW





ADPL04-8

·Brushless motor, delivering up to 140N.m of torque;
·125mm compact body, perfect control in narrow space.



ADJZ1250i

·Brushless motor, delivering up to 50N.m of torque;
·2-speed adjustment, 0-500/0-1800/min, high torque for screw driving,
high speed for drilling.

Accessories & Package

• 12V MAX Lithium–Ion battery 2.0Ah × 2 • 3A Charger • Driver Bit(2pcs) • Belt Clip(2pcs)
• D–STACK Stacking Box

AK12V255-1(TYPE BK) CORDLESS BRUSHLESS COMBO KIT 12MAX V

EC BRUSHLESS

NEW





ADPL04-8

·Brushless motor, delivering up to 140N.m of torque;
·125mm compact body, perfect control in narrow space.



ADJZ1250i

·Brushless motor, delivering up to 50N.m of torque;
·2-speed adjustment, 0-500/0-1800/min, high torque for screw driving,
high speed for drilling.

Accessories & Package

• 12V MAX Lithium–Ion battery 2.0Ah × 2 • 3A Charger • Driver Bit(2pcs) • Belt Clip(2pcs)
• Tool Carrying Bag • Carton Packing

AK20V358-1(TYPE BK) CORDLESS BRUSHLESS COMBO KIT 20MAX V

EC BRUSHLESS





ADMQ85

·Brushless motor, high-efficiency, powerful and durable;
·6-speed adjustment, applicable to different working conditions.



ADMY02-185

·850W powerful brushless motor, for efficient cutting;
·0-65mm adjustable cutting depth.



ADJZ2060i

·Brushless motor, delivering up to 60N.m of torque;
·152mm compact body, perfect control in narrow space.

Accessories & Package

· 20MAX Lithium-Ion battery 4.0Ah × 2 · 4A Charger · Screwdriver bits · Hook Assembly
· Saw Blade(T144D) · Saw Blade(T118A) · Gloves · Hex Wrench · Fixing Plate · Saw Blade
· Tool Carrying Bag · Carton Packing

AK20V367-01(TYPE EK) CORDLESS BRUSHLESS COMBO KIT 20MAX V

EC BRUSHLESS

NEW





ADZC04-24

·3-Mode operation: Drill, rotary hammer and demolition;
·Double safety protection: Mechanical clutch and overcurrent protection.



ADJZ2055i

·Brushless motor, Delivering up to 55N.m of torque;
·18+2 torque setting: For a variety of applications.



ADSM06-115

·680W Brushless Motor, Efficient, powerful and durable;
·Anti-restart , Preventing accidental start.

Accessories & Package

· 20V MAX Lithium-Ion battery 4.0Ah × 2 · 4A Charger · Auxiliary Handle (Angle grinder)
· Auxiliary Handle (Rotary hammer) · Depth Gauge · Wheel Guard · Wrench · Belt Clip
· D-STACK Stacking Box Packing

AK20V2102-02(TYPE BK) CORDLESS BRUSHLESS COMBO KIT 20MAX V

EC BRUSHLESS

NEW





ADSM06-125

·680W Brushless motor, efficient, powerful and durable;
·Anti-restart function, preventing accidental start.



ADZC05-26

·Brushless motor;
·3-Mode operation, drill, rotary hammer and demolition.

Accessories & Package

· 20VMAX Lithium-Ion battery 4.0Ah × 2 · 4A Charger · Auxiliary Handle (Angle Grinder)
· Wheel Guard · Wrench · Auxiliary Handle (Rotary Hammer) · Depth Gauge · Flap Discs
· Cut off Wheel (3 pcs) · Grinding Wheel · 14 × 250 Point Chisels · 14 × 250 Flat Chisels
· 8 × 160 Hammer Drill Bits · 10 × 160 Hammer Drill Bits · 14 × 350 Hammer Drill Bits
· Knitted and PVC Dots Gloves · Tool Carrying Bag · Carton Packing

*Specifications may differ from country to country.

AK20V2103/2103-02(TYPE BK) CORDLESS BRUSHLESS COMBO KIT 20MAX V

EC BRUSHLESS

[AK20V2103] ADSM06-100& ADZC04-24
[AK20V2103-02] ADSM06-125& ADZC04-24

NEW





ADSM06-100/125

·680W Brushless motor, efficient, powerful and durable;
·Anti-restart function, preventing accidental start.



ADZC04-24

·3.2kg lightweight body(with a 4.0Ah battery), easier to operate;
·Stepless speed adjustment, applicable to different working conditions.

Accessories & Package

· 20VMAX Lithium-Ion battery 4.0Ah × 2 · 4A Charger · Auxiliary Handle (Rotary hammer)
· Depth Gauge · Auxiliary Handle (Angle grinder) · Wheel Guard · Wrench · Flap Discs
· Cut off Wheels · Grinding Wheels · 8x160 Hammer Drill Bits · 10x160 Hammer Drill Bits
· 14x350 Hammer Drill Bits · 14x250 Point Chisels · 14x250 Flat Chisels
· Knitted and PVC Dots Gloves · Tool Carrying Bag · Carton Packing

AK20V3104/3104-02(TYPE BK) CORDLESS BRUSHLESS COMBO KIT 20MAX V

EC BRUSHLESS

[AK20V3104] ADSM06-100& ADJZ2060i& ADZC04-24
[AK20V3104-02] ADSM06-125& ADJZ2060i& ADZC04-24

NEW





ADSM06-100/125

·680W Brushless motor, efficient, powerful and durable;
·Anti-restart function, preventing accidental start.



ADJZ2060i

·2-speed adjustment, high torque for screw driving, high speed for drilling;
·13mm (1/2") ratchet metal chuck, sturdy and durable.



ADZC04-24

·3.2kg lightweight body(with a 4.0Ah battery), easier to operate;
·Stepless speed adjustment, applicable to different working conditions.

Accessories & Package

· 20VMAX Lithium-Ion Battery 4.0Ah × 2 · 4A Charger · Auxiliary Handle (Angle Grinder)
· Auxiliary Handle (Rotary hammer) · Depth Gauge · Wheel Guard · Wrench · Flap Discs
· Cut off Wheel (3pcs) · Grinding Wheel · 14 × 250 Point Chisels · 14 × 250 Flat Chisels
· 8 × 160 Hammer Drill Bit · 10 × 160 Hammer Drill Bit · 14 × 350 Hammer Drill Bit · Driver Bit
· Belt Clip · Knitted and PVC Dots Gloves · Tool Carrying Bag · Carton Packing

AK20V2118-01/2118-02(TYPE EK) CORDLESS BRUSHLESS COMBO KIT 20MAX V

EC BRUSHLESS

[AK20V2118-01] ADSM06-115& ADPL20V-206
[AK20V2118-02] ADSM06-125& ADPL20V-206

NEW





ADSM06-115/125

·680W Brushless motor, efficient, powerful and durable;
·Anti-restart function, preventing accidental start.



ADPL20V-206

·Brushless outer rotor motor, delivering up to 206N.m of torque;
·107mm ultra compact body, perfect control in narrow space.

Accessories & Package

· 20VMAX Lithium-Ion Battery 4.0Ah × 2 · 4A Charger · Belt Clip · Driver Bit
· Auxiliary Handle (Angle Grinder) · Wheel Guard · Wrench · D-STACK Stacking Box


AK20V5105-02(TYPE E1F1K) CORDLESS BRUSHLESS COMBO KIT 20MAX V

EC BRUSHLESS





ADSM06-125
·680W Brushless motor, efficient, powerful and durable;
·Anti-restart function, preventing accidental start.



ADJZ2060i
·2-speed adjustment, high torque for screw driving, high speed for drilling;
·13mm (1/2") ratchet metal chuck, sturdy and durable.



ADZC04-24
·3.2kg lightweight body(with a 4.0Ah battery), easier to operate;
·Stepless speed adjustment, applicable to different working conditions.



ADPB320
·Brushless motor, delivering up to 320N.m fastening torque;
·2-speed control, applicable to different working conditions.



ADPL20V-206
·Brushless outer rotor motor, delivering up to 206N.m of torque;
·107mm ultra compact body, perfect control in narrow space.

Accessories & Package

• 20V MAX Lithium–Ion Battery 4.0Ah • 20V MAX Lithium–Ion Battery 5.0Ah • 4A Charger
• Auxiliary Handle (Angle grinder) • Wheel Guard • Wrench • Auxiliary Handle (Rotary hammer)
• Depth Gauge • Belt Clip (3pcs) • Flap Discs • Cut off Wheel(3pcs) • Grinding Wheel
• 14 × 250 Point Chisels • 14 × 250 Flat Chisels • 8 × 160 Hammer Drill Bit • 10 × 160 Hammer Drill Bit
• 14 × 350 Hammer Drill Bit • Sockets Assembly (S22) • Driver Bit (2pcs) • Knitted and PVC Dots Gloves
• Tool Carrying Bag • Carton Packing

AK20V5106(TYPE BK) CORDLESS BRUSHLESS COMBO KIT 20MAX V

EC BRUSHLESS





ADSM06-100
·680W Brushless motor, efficient, powerful and durable;
·Anti-restart function, preventing accidental start.



ADJZ2060i
·2-speed adjustment, high torque for screw driving, high speed for drilling;
·13mm (1/2") ratchet metal chuck, sturdy and durable.



ADZC04-24
·3.2kg lightweight body(with a 4.0Ah battery), easier to operate;
·Stepless speed adjustment, applicable to different working conditions.



ADPB520
·Brushless motor, delivering up to 520N.m fastening torque;
·152mm compact body, perfect control in narrow space.



ADPL20V-206
·Brushless outer rotor motor, delivering up to 206N.m of torque;
·107mm ultra compact body, perfect control in narrow space.

Accessories & Package

• 20VMAX Lithium–Ion Battery 4.0Ah × 2 • 4A Charger • Auxiliary Handle (Angle Grinder)
• Auxiliary Handle (Rotary Hammer) • Depth Gauge • Wheel Guard • Wrench • Flap Discs
• Cut off Wheels *3 • Grinding Wheels • 14 × 250 Point Chisels • 14 × 250 Flat Chisels
• 8 × 160 Hammer Drill Bit • 10 × 160 Hammer Drill Bit • 14 × 350 Hammer Drill Bit • Belt Clip(3pcs)
• Driver Bit (2pcs) • Sockets Assembly (S22) • Knitted and PVC Dots Gloves • Tool Carrying Bag
• Carton Packing

*Specifications may differ from country to country.


AK20V3122-01(TYPE BK) CORDLESS BRUSHLESS COMBO KIT 20MAX V

EC BRUSHLESS





ADSM06-115
·680W Brushless motor, efficient, powerful and durable;
·Anti-restart function, preventing accidental start.



ADJZ2060i
·2-speed adjustment, high torque for screw driving, high speed for drilling;
·13mm (1/2") ratchet metal chuck, sturdy and durable.



ADZC05-26
·Brushless motor;
·Safety Clutch Function, automatically stop when the drill bit gets stuck.

Accessories & Package

• 20VMAX Lithium–Ion Battery 4.0Ah × 2 • 4A Charger • Auxiliary Handle (Angle Grinder)
• Auxiliary Handle (Rotary Hammer) • Wheel Guard • Wrench • Depth Gauge • Belt Clip
• Flap Discs (1pcs) • Cut off Wheel(3pcs) • Grinding Wheel (1pcs) • 14 × 250 Point Chisels
• 14 × 250 Flat Chisels • 8 × 160 Hammer Drill Bit • 10 × 160 Hammer Drill Bit • 14 × 350 Hammer Drill Bit
• Driver Bit • Knitted and PVC Dots Gloves • Tool Carrying Bag • Carton Packing







AK20V5123-01(TYPE E1F1K) CORDLESS BRUSHLESS COMBO KIT 20MAX V

EC BRUSHLESS





ADSM06-115
·680W Brushless motor, efficient, powerful and durable;
·Anti-restart function, preventing accidental start.



ADJZ2060i
·2-speed adjustment, high torque for screw driving, high speed for drilling;
·13mm (1/2") ratchet metal chuck, sturdy and durable.



ADZC05-26
·Brushless motor;
·Safety Clutch Function, automatically stop when the drill bit gets stuck.



ADPB320
·Brushless motor, delivering up to 320N.m fastening torque;
·2-speed control, applicable to different working conditions.



ADWL2001
·2500LM Max. brightness, illuminates the working environment;
·3-mode brightness adjustment, meeting different working requirements.

Accessories & Package

• 20V MAX Lithium–Ion Battery 4.0Ah • 20V MAX Lithium–Ion Battery 5.0Ah • 4A Charger
• Auxiliary Handle (Angle Grinder) • Wheel Guard • Wrench • Auxiliary Handle (Hammer Drill)
• Depth Gauge • Belt Clip (2pcs) • Flap Discs (1pcs) • Cut off Wheels (3pcs) • Grinding Wheels (1pcs)
• 14 × 250 Point Chisels • 14 × 250 Flat Chisels • 8 × 160 Hammer Drill Bit • 10 × 160 Hammer Drill Bit
• 12 × 350 Hammer Drill Bit • Driver Bit • Soecket Assembly (S22) • Knitted and PVC Dots Gloves
• Rolling Rigid Tool Bag • Carton Packing

DCA

AC TOOLS

*Specifications may differ from country to country

APL8 IMPACT SCREWDRIVER



Rated Power Input	300W
No-load Speed	0-2200/min
Rated Impacting Frequency	0-3000/min
Max. Fastening Torque	98N·m
Net Weight	1.3kg

Features

- 300W high-quality motor;
- Variable speed adjustment, applicable to different working conditions;
- 1.3kg lightweight body; • External carbon brush, convenient for replacement.

Accessories & Package

- Double Cross Screwdrive Bit • Carbon Brush • Carton Packing

APB12 ELECTRIC WRENCH



Rated Power Input	300W
No-load Speed	1800/min
Rated Impacting Frequency	2000/min
Capacities(Bolt Size)	M8-M12
Square Drive Size	12.7 x 12.7mm(1/2")
Max. Fastening Torque	188N·m
Net Weight	2.1kg

Features

- 300W high quality motor;
- External carbon brush ,convenient for replacement; • 2.1kg lightweight body;
- Efficient heat dissipation air vents, effectively extending the lifetime of products.

Accessories & Package

- Socket 18 x 12.5L • Socket Pin • O Ring • Carbon Brush • Carton Packing

APB16 ELECTRIC WRENCH



Rated Power Input	450W
No-load Speed	1800/min
Rated Impacting Frequency	2000/min
Capacities(Bolt Size)	M10-M16
Square Drive Size	12.7 x 12.7mm(1/2")
Fastening torque range	240-300N·m
Net Weight	2.6kg

Features

- 450W high quality motor; • High strength gear box, robust and durable;
- Efficient heat dissipation air vents ,effectively extending the lifetime of products;
- External carbon brush, convenient for replacement.

Accessories & Package

- Socket 24 x 12.5L • Socket Pin • O Ring • Carbon Brush • Carton Packing

APB20C ELECTRIC WRENCH



Rated Power Input	340W
No-load Speed	1700/min
Rated Impacting Frequency	2000/min
Capacities(Bolt Size)	M12-M20
Square Drive Size	12.7 x 12.7mm(1/2")
Max. Fastening Torque	294N·m
Net Weight	3.2kg

Features

- 340W high quality motor; • Rocker type reversing switch;
- Front rubberized bumper, for increased durability and user protection;
- Efficient heat dissipation air vents, effectively extending the lifetime of products.

Accessories & Package

- Socket 24 x 12.5L • Socket Pin • O Ring • Carbon Brush • Plastic Case Packing

APB22C ELECTRIC WRENCH



Rated Power Input	620W
No-load Speed	1700/min
Rated Impacting Frequency	1600/min
Capacities(Bolt Size)	M16-M22
Square Drive Size	19 x 19mm(3/4")
Max. Fastening Torque	588N·m
Net Weight	5.0kg

Features

- 620W high quality motor; • 360° rotatable Auxiliary handle;
- External carbon brush,convenient for replacement;
- Reversing rocker switch.

Accessories & Package

- Socket 32 x 19L • Socket Pin • O Ring • Auxiliary Handle Assembly • Carbon Brush
- Plastic Case Packing

APB30 ELECTRIC WRENCH



Rated Power Input	1050W
No-load Speed	1400/min
Rated Impacting Frequency	1500/min
Capacities(Bolt Size)	M24-M30
Square Drive Size	25.4 x 25.4mm(1")
Fastening torque range	400-900N·m
Net Weight	10.0kg

Features

- 1050W powerful motor; • 360° rotatable D-shaped auxiliary handle,for convenient operation;
- External carbon brush,convenient for replacement;
- Efficient heat dissipation air vents,effectively extending the lifetime of products.

Accessories & Package

- Socket 36mm • Socket Pin • O Ring • Auxiliary Handle Assembly • Carbon Brush
- Plastic Case Packing

APB32 ELECTRIC WRENCH



Rated Power Iuput	1050W
No-load Speed	1400/min
Rated Impact Frequency	1500/min
Capacities (Bolt Size)	M22-M30
Square Drive	25.4×25.4mm(1")
Fastening torque range	400-950N·m
Net Weight	10.3kg

Features

- 1050W powerful motor; • External carbon brush, convenient for replacement;
- 360° rotatable D-shaped auxiliary handle, for convenient operation;
- Extended output shaft, easy to operate in narrow space.

Accessories & Package

- Socket 36mm • Socket Pin • O Ring • Auxiliary Handle Assembly • Carbon Brush
- Plastic Case Packing

APB24E SHEAR WRENCH



Rated Power Input	1050W
No-load Speed	18/min
Max. Fastening Torque	1100N·m
Net Weight	8.0kg

Features

- 1050W powerful motor; • M16、M20、M22、M24 sleeve assemblies available;
- External carbon brush, convenient for replacement;
- Efficient heat dissipation air vents, effectively extending the lifetime of products.

Accessories & Package

- Outer Socket Assembly M22/ M24 • Inner Socket Assembly M22/ M24 • Slotter Screwdriver
- Carbon Brush • Iron Carrying Case

AJZ02-6A ELECTRIC DRILL



Rated Power Input	230W
No-load Speed	0-3800/min
Max. Drilling Capacity	
Steel	Φ6.5mm
Wood	Φ9mm
Net Weight	1.2kg

● Optional: Keyless Chuck

Features

• 230W high quality motor; • Variable speed,applicable to different working conditions;
• 6.5mm (1/4") metal chuck, sturdy and durable; • Lock-on Button, for continuous operation.
• Ergonomics body design, reducing operator fatigue.

Accessories & Package

• Depth Gauge Assembly • Chuck Wrench (Key Chuck Optional) • Carbon Brush
• Carton Packing

AJZ10A ELECTRIC DRILL



Rated Power Input	300W
No-load Speed	0- 3000/min
Max. Drilling Capacity	
Steel	Φ10mm
Wood	Φ18mm
Net Weight	1.5kg

● Optional: Keyless Chuck

Features

• 300W high quality motor; • 3000/min no-load speed, high working efficiency;
• Variable speed, applicable to different working conditions;
• 10mm (3/8") metal chuck, sturdy and durable.

Accessories & Package

• Twist Drill Bit (3.2mm) • Chuck Wrench (Key Chuck Optional) • Carbon Brush
• Carton Packing

AJZ12-10 ELECTRIC DRILL



Rated Power Input	468W
No-load Speed	0- 3200/min
Max. Drilling Capacity	
Steel	Φ10mm
Wood	Φ25mm
Net Weight	1.3kg

Features

• 468W high quality motor; • High-strength metal chuck, sturdy and durable;
• Stepless speed adjustment, applicable to different working conditions;
• Hanging hook design, for Increased convenience of use;
• Efficient heat dissipation air vents, effectively extending the lifetime of product.

Accessories & Package

• Chuck Wrench • Carbon Brush • Carton Packing

AJZ12-10K ELECTRIC DRILL



Rated Power Input	468W
No-load Speed	0- 3200/min
Max. Drilling Capacity	
Steel	Φ10mm
Wood	Φ25mm
Net Weight	1.3kg

Features

• 468W high quality motor; • 10mm (3/8") high-strength keyless chuck;
• Stepless speed adjustment, applicable to different working conditions;
• Hanging hook design, for Increased convenience of use;
• Efficient heat dissipation air vents, effectively extending the lifetime of product.

Accessories & Package

• Carbon Brush • Carton Packing

AJZ14-10 ELECTRIC DRILL



Rated Power Input	500W
No-load Speed	0- 3300/min
Max. Drilling Capacity	
Steel	Φ10mm
Wood	Φ25mm
Net Weight	1.4kg

Features

• 500W high quality motor; • Variable speed, applicable to different working conditions;
• 10mm (3/8") metal chuck; • Hanging hook design, for Increased convenience of use;
• Efficient heat dissipation air vents, effectively extending the lifetime of product.

Accessories & Package

• Chuck Wrench • Carbon Brush • Carton Packing

AJZ14-10K ELECTRIC DRILL



Rated Power Input	500W
No-load Speed	0- 3300/min
Max. Drilling Capacity	
Steel	Φ10mm
Wood	Φ25mm
Net Weight	1.4kg

Features

• 500W high quality motor; • Variable speed, applicable to different working conditions;
• 10mm (3/8") high-strength keyless chuck; • Hanging hook design, for Increased convenience of use;
• Efficient heat dissipation air vents, effectively extending the lifetime of product.

Accessories & Package

• Carbon Brush • Carton Packing

AJZ16A ELECTRIC DRILL



Rated Power Input	800W
No-load Speed	680/min
Max. Drilling Capacity	
Steel	Φ16mm
Wood	Φ36mm
Net Weight	3.2kg

Features

• 800W high quality motor; • 360° Rotatable D-shaped auxiliary handle;
• 16mm (5/8") metal chuck; • High strength gear box, robust and durable;
• Auxiliary side handle, providing better control for drilling applications.

Accessories & Package

• Auxiliary Handle • Extension Bar-Auxiliary Handle • Chuck Wrench • Carbon Brush • Carton Packing

AJZ03-16A ELECTRIC DRILL



Rated Power Input	1010W
No-load Speed	620/min
Max. Drilling Capacity	
Steel	Φ16mm
Wood	Φ36mm
Net Weight	3.2kg

Features

• 1010W high quality motor; • 360° Rotatable D-shaped auxiliary handle;
• 16mm (5/8") metal chuck; • High strength gear box, robust and durable;
• Efficient heat dissipation air vents, effectively extending the lifetime of products.

Accessories & Package

• Auxiliary Handle • Extension Bar-Auxiliary Handle • Chuck Wrench • Carbon Brush • Carton Packing

*Specifications may differ from country to country.

COMPACT BUT POWERFUL

468W POWERFUL MOTOR

HIGH-STRENGTH METAL CHUCK
Sturdy and durable

STEPLESS SPEED ADJUSTMENT
Applicable to different working conditions


EFFICIENT HEAT DISSIPATION AIR VENTS
Effectively extending the lifetime of product



AJZ12-10/12-10K

ELECTRIC DRILL

AZJ06-13 ELECTRIC IMPACT DRILL

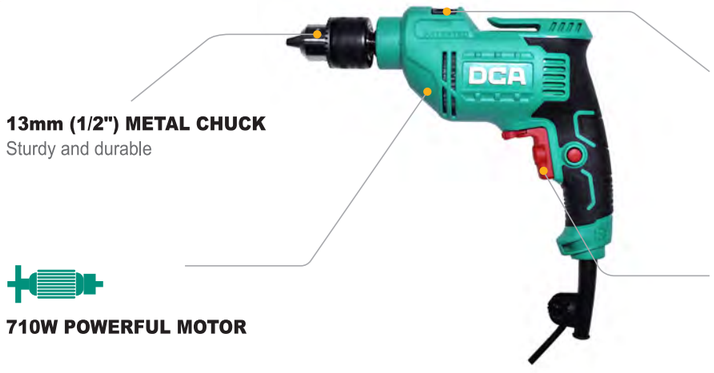

13mm (1/2") METAL CHUCK
Sturdy and durable

710W POWERFUL MOTOR

Drill Impact Drill
TWO FUNCTIONS: DRILL&IMPACT DRILL
For a variety of applications

VARIABLE SPEED ADJUSTMENT
Applicable to different working conditions

Rated Power Input	710W
No-load Speed	0-3000/min
Rated Impact Frequency	0-48000/min
Max. Drilling Capacity	
Steel	Φ10mm
Brick Wall	Φ13mm
Wood	Φ22mm
Net Weight	1.6kg

Accessories & Package
• Auxiliary Handle • Depth Gauge • Chuck Wrench • Carbon Brush • Carton Packing



AZJ16S ELECTRIC IMPACT DRILL

Drill Impact drill
TWO FUNCTIONS
Applicable to various working conditions

13mm (1/2") METAL CHUCK

HIGH STRENGTH GEAR BOX
Sturdy and durable



710W POWERFUL MOTOR

LOCK-ON BUTTON
For continuous operation

STEPLESS SPEED ADJUSTMENT
Applicable to different working conditions

Rated Power Input	710W
No-load Speed	0-3000/min
Rated Impact Frequency	0-45000/min
Max. Drilling Capacity	
Steel	Φ13mm
Brick Wall	Φ16mm
Wood	Φ30mm
Net Weight	2.0kg

Accessories & Package
• Auxiliary Handle • Depth Gauge • Chuck Wrench • Carbon Brush • Carton Packing



*Specifications may differ from country to country.

AZJ03-13 ELECTRIC IMPACT DRILL



Rated Power Input	500W
No-load Speed	0-1450/min
Rated Impact Frequency	0-18850/min
Max. Drilling Capacity	
Steel	Φ13mm
Brick Wall	Φ13mm
Wood	Φ20mm
Net Weight	2.5kg

● Drill & Impact Drill

Features
• 500W high quality motor; • Variable speed adjustment, applicable to different working conditions;
• Two functions: drill & impact drill; • 13mm (1/2") metal chuck;
• Auxiliary side handle, providing better control for drilling applications.

Accessories & Package
• Auxiliary Handle • Depth Gauge • Chuck Wrench • Carbon Brush • Carton Packing

AZZ02-120S DIAMOND DRILL WITH WATER SOURCE



Rated Power Input		1600W
No-load Speed		0-2000/min
Max. Drilling Capacity	Brick Wall	Φ120mm
	Concrete	Φ76mm
Net Weight		4.0kg

Features
• 1600W powerful motor;
• Water seal-free design, ensuring leak-proof performance and enhanced durability;
• Overload protection, protecting the machine and user when the machine gets overload;
• External carbon brush, convenient for replacement.

Accessories & Package
• Auxiliary Handle • Shoulder Support Assembly • Shock Absorber Pad
• Pipe Connector • Screw (4pcs) • Carton Packing

AZZ04-160 DIAMOND DRILL WITH WATER SOURCE

QUINTUPLE-STAGE SEALED GEAR BOX
Optimized oil retention and lubrication efficiency



2200W POWERFUL MOTOR

WATER SEAL-FREE DESIGN
Ensuring leak-proof performance and enhanced durability

STEPLESS SPEED ADJUSTMENT
Applicale to different working conditions

Rated Power Input		2200W
No-load Speed		0-1600/min
Max. Drilling Capacity		
	Brick Wall	Φ160mm
	Concrete	Φ102mm
Net Weight		6.8kg

Accessories & Package
• Auxiliary Handle • Shoulder Support Assembly • Pipe Connector • Screw (4pcs)
• Carton Packing



AZJ20 ELECTRIC IMPACT DRILL



Rated Power Input			720W
No-load Speed	1st gear		0-1150/min
	2nd gear		0-2800/min
Rated Impact Frequency	1st gear		0-23000/min
	2nd gear		0-56000/min
Max. Drilling Capacity			
	1st gear	Steel	Φ13mm
		Brick Wall	Φ20mm
		Wood	Φ40mm
	2nd gear	Steel	Φ8mm
		Brick Wal	Φ20mm
		Wood	Φ25mm
Net Weight			2.4kg

● Drill & Impact Drill

Features
• 720W powerful motor, high load capacity; • 2-speed mechanical speed control;
• 13mm (1/2") metal chuck; • Adjustable speed, forward and reverse rotation;
• Premium rubberized handle, easy to carry and comfortable to hold.

Accessories & Package
• Auxiliary Handle • Depth Gauge • Chuck Wrench • Carbon Brush • Plastic Case Packing

AZZ02-130 DIAMOND DRILL WITH WATER SOURCE



Rated Power Input	1800W
No-Load Speed	1200/min
Max. Drilling Capacity	Φ130mm
Net Weight	11.6kg

Features
• 1800W powerful motor; • Aluminum gearbox, sturdy and durable;
• Soft start, for accurate positioning;
• Earth leakage protection, protecting user safety;
• External carbon brush, convenient for replacement.

Accessories & Package
• Water Pipe • Pipe Connector • Open-end Wrench • Hex Wrench (2pcs)
• Carbon Brush • Carton Packing

AZZ168 DIAMOND DRILL WITH WATER SOURCE



Rated Power Input		2000W
No-load Speed		0-1950/min
Max.Drilling Capacity		
	Concrete	Φ102mm
	Brick wall	Φ168mm
Net Weight		5.8kg

Features

- 2000W powerful motor; • Aluminum gearbox, sturdy and durable;
- The structure without water seal, no water leakage and more durable;
- Variable speed adjustment, applicable to diffident working conditions;
- External carbon brush, convenient for replacement.

Accessories & Package

• Auxiliary Handle • Pipe Connector • Shoulder Support Assembly • Carton Packing



AZZ190 DIAMOND DRILL WITH WATER SOURCE



Rated Power Input			1800W
No-load Speed			
Gear1	Brick wall	Φ110-190mm	750/min
Gear2	Brick wall	Φ65-110mm	1650/min
Gear3	Brick wall	Φ15-65mm	3300/min
Net Weight			6.0kg

Features

- 1800W powerful motor; • Aluminum gearbox, sturdy and durable;
- 3-speed mechanical speed control, applicable to different working conditions;
- Soft start, for easy positioning when drilling;
- Overload protection, protecting the machine and user when the machine gets overload.

Accessories & Package

• Water Pipe • Pipe Connector • Open-end Wrench • Auxiliary Handle • Carbon Brush • Plastic Case Packing

AZZ200S DIAMOND DRILL WITH WATER SOURCE



Rated Power Input	3300W
No-load Speed	500/min
Max. Drilling Capacity	Φ200mm
Net Weight	22.0kg

Features

- 3300W powerful motor; • Aluminum gearbox, sturdy and durable;
- Steel guide rail, high precision and smooth operation;
- Earth leakage protection, protecting user safety;
- External carbon brush, convenient for replacement.

Accessories & Package

• Water Pipe • Pipe Connector • Hex Wrench (3pcs) • Carbon Brush • Carton Packing

AZZ02-200S DIAMOND DRILL WITH WATER SOURCE



Rated Power Input	3500W
No-load Speed	700/min
Max. Drilling Capacity	Φ200mm
Net Weight	25.0kg

Features

- 3500W powerful motor; • Aluminum gearbox, sturdy and durable;
- Steel guide rail, high precision and smooth operation;
- Earth leakage protection, protecting user safety;
- External carbon brush, convenient for replacement.

Accessories & Package

• Water Pipe • Pipe Connector • Open-end Wrench • Hex Wrench (3pcs)
• Carbon Brush • Carton Packing

AZZ250 DIAMOND DRILL WITH WATER SOURCE



Rated Power Input	3800W
No-load Speed	580/min
Max. Drilling Capacity	Φ250mm
Net Weight	25.0kg

Features

- 3800W powerful motor; • Steel guide rail,higher precision and smoother operation;
- Soft start, easy to locate when drilling;
- Overload protection, protecting the machine and user when the machine gets overload;
- Earth leakage protection, protecting user safety.

Accessories & Package

• Water Pipe • Pipe Connector • Open-end Wrench • Hex Wrench (3pcs)
• Carbon Brush • Carton Packing

AZZ02-250 DIAMOND DRILL WITH WATER SOURCE



Rated Power Input	3800W
No-load Speed	390/1100/min
Max. Drilling Capacity	Φ250mm
Net Weight	25.0kg

Features

- 3800W powerful motor; • 2-speed mechanical speed control;
- Steel guide rail, high precision and smooth operation;
- Overload protection, protecting the machine and user when the machine gets overload;
- Earth leakage protection, protecting user safety.

Accessories & Package

• Water Pipe • Pipe Connector • Open-end Wrench • Hex Wrench (3pcs)
• Carbon Brush • Carton Packing

AZZ02-250A DIAMOND DRILL WITH WATER SOURCE



Rated Power Input	3800W
No-load Speed	390/1100/min
Max. Drilling Capacity	Φ250mm
Net Weight	25.5kg

Features

- 3800W powerful motor; • 2-speed mechanical speed control;
- Steel guide rail, high precision and smooth operation;
- Overload protection, protecting the machine and user when the machine gets overload;
- Earth leakage protection, protecting user safety.

Accessories & Package

• Water Pipe • Pipe Connector • Open-end Wrench • Hex Wrench (3pcs)
• Carbon Brush • Carton Packing

*Specifications may differ from country to country.

RECOMMENDED ACCESSORIES

Diamond Core Bit

No.	Specification (mm)	Working Length	Connection Thread	Product Code
1	Φ63×370	310	M22	30271100011
2	Φ102×350	290	M22	30271100015
3	Φ200×450	390	M22	30271100114
4	Φ63×365	310	1-1/4"	30271100129
5	Φ102×365	300	1-1/4"	30271100132
6	Φ200×455	390	1-1/4"	30271100123





AJC16B MAGNETIC DRILL



Rated Power Input	900W
Max. Drilling Capacity	Φ16mm
Magnetism	11500N
No-load Speed	450/min
Max. Stroke	140mm
Connector	Mt2 Shank
Net Weight	11.5kg

Features

- 900W high quality motor; • Twist drilling only;
- Dual-coil electromagnetic suction cup, providing 11500N powerful magnetism;
- Double dovetail groove guideway, precise guidance;
- Extended rocker arm lift bar, easy to operate.

Accessories & Package

• Open-end Wrench • Safety Belt • Hex Wrench • Drill Chuck Wrench • Fuse
• Carbon Brush • Plastic Case Packing

AJC23B MAGNETIC DRILL



Rated Power Input	1500W
Max. Drilling Capacity	
Twist Drill Bit	Φ23mm
Core Drill Bit	Φ50mm
Magnetism	15000N
No-load Speed	390/min
Max. Stroke	220mm
Connector	Mt2 Shank
Net Weight	21.0kg

Features

- 1500W high quality motor; • Twist drilling/core drilling, dual function;
- Dual-coil electromagnetic suction cup, providing 15000N powerful magnetism;
- Double dovetail groove guideway, precise guidance;
- Extended rocker arm lift bar, easy to operate.

Accessories & Package

• Core Drill Bit (22mm) • Core Drill Adaptor Assembly • Wedge Iron • Flat Tail Morse Rod • Safety Belt
• Hex Wrench (2pcs) • Drill Chuck Wrench • Drill Chuck • Fuse • Center Pin (Short Type)
• Center Pin (Long Type) • Oiler Assembly • Carbon Brush • Plastic Case Packing

AJC02-23B MAGNETIC DRILL



Rated Power Input	1600W
Max. Drilling Capacity	
Twist Drill Bit	Φ23mm
Core Drill Bit	Φ50mm
Max.Tapping Capacity	M20(Sold Separately)
Magnetism	15000N
No-load Speed	130-260/260-520/min
Max. Stroke	220mm
Connector	Mt3 Shank
Net Weight	24.0kg

Features

- 1600W high quality motor; • Variable speed adjustment;
- Mechanical speed control, 2-speed mechanical speed control;
- Twist drilling/tapping/core drilling, all done effortlessly with one machine;
- Dual-coil electromagnetic suction cup, providing 15000N Powerful magnetism.

Accessories & Package

• Core Drill Adaptor Assembly • Wedge Iron • Flat Tail Morse Rod • Safety Belt • Hex Wrench (3pcs)
• Drill Chuck Wrench • Drill Chuck • Center Pin (Short Type) • Center Pin (Long Type) • Carbon Brush
• Plastic Case Packing

AJC30B MAGNETIC DRILL(CORE DRILL)



Rated Power Input	900W
Max. Drilling Capacity	Φ30mm
Max.Drilling Depth	35mm
Magnetism	11500N
No-load Speed	450/min
Max. Stroke	140mm
Connector	Straight ShankΦ19mm
Net Weight	11.5kg

Features

- 900W High quality motor; • Core drilling only;
- Dual-coil electromagnetic suction cup, providing 11500N powerful magnetism;
- Double dovetail groove guideway, precise guidance;
- Extended rocker arm lift bar, easy to operate.

Accessories & Package

• Core Drill Bit (22mm) • Safety Belt • Hex Wrench (2pcs) • Open-end Wrench • Fuse
• Center Pin (Short Type) • Oiler Assembly • Protective Cover • Carbon Brush
• Plastic Case Packing

AJC02-30B MAGNETIC DRILL



Rated Power Input	900W
Max. Drilling Capacity	
Twist Drill Bit	Φ13mm
Core Drill Bit	Φ30mm
Magnetism	11500N
No-load Speed	450/min
Max. Stroke	140mm
Net Weight	12.0kg


Features

- 900W high quality motor; • Twist drilling/core drilling, dual function;
- Dual-coil electromagnetic suction cup, providing 11500N powerful magnetism;
- Double dovetail groove guideway, precise guidance;
- Extended rocker arm lift bar, easy to operate.

Accessories & Package

• Core Drill Bit (22mm) • Core Drill Adaptor Assembly • Open-end Wrench(2pcs)
• Hex Wrench (2pcs) • Drill Chuck Wrench • Drill Chuck • Adaptor • Fuse • Center Pin (Short Type)
• Oiler Assembly • Protective Cover • Carbon Brush • Plastic Case Packing

LIST OF HOME DECORATION, ENGINEERING INSTALLATION SERIES



Pictures									
Models	ADZC22 20V MAX	ADZC04-24 20V MAX	ADZC02-26 20V MAX	ADZC05-26 20V MAX	ADZC05-26L 20V MAX	ADZC20V-0228 20VMAX	ADZC03-28 20V MAX	AZC05-26B	AZC800-26B
Specifications Rated power Input	420W(Max. output power)	500W(Max.output power)	600W(Max.output power)	600W(Max.output power)	600W(Max.output power)	900W(Max.output power)	900W(Max.output power)	800W	800W
No-load Speed	0-1400/min	0-1000/min	0-960/min	0-1180/min	0-1180/min	0-1050/min	0-750/min	0-1200/min	0-1100/min
Rated Impact Frequency	0-4500/min	0-4500/min	0-4260/min	0-4300/min	0-4300/min	0-5500/min	0-3800/min	0-4000/min	0-4200/min
Impact Energy	2.2J	2.8J	3.1J	3.0J	3.0J	3.8J	4.5J	3.0J	3.0J
Net Weight	2.6kg(with 4.0Ah battery)	3.2kg(with 4.0Ah battery)	3.4kg(with 4.0Ah battery)	3.1kg(with 4.0Ah battery)	3.2kg(with 4.0Ah battery)	3.9kg(with 4.0Ah battery)	4.8kg(with 4.0Ah battery)	2.93kg	2.9kg
Tool Holder	SDS-PLUS	SDS-PLUS	SDS-PLUS	SDS-PLUS	SDS-PLUS	SDS-PLUS	SDS-PLUS	SDS-PLUS	SDS-PLUS
	Total Range / Optimal						Total Range / Optimal		
Drilling Diameter in concrete（mm）	6 12 22	6 14 24	6 8 16 26	6 8 16 26	6 8 16 26	6 8 18 28	6 8 18 28	6 16 26	6 16 26
Modes Drill Function	●	●	●	●	●			●	●
Rotary Hammer function	●	●	●	●	●	●	●	●	●
Demolition Function	●	●	●	●	●	●	●	●	●
Adjustable Speed	●	●	●	●	●	●	●	●	●
Drilling/Chiselling ratio	10% Drilling 90% Chiselling	10% Drilling 90% Chiselling	10% Drilling 90% Chiselling	10% Drilling 90% Chiselling	10% Drilling 90% Chiselling	10% Drilling 90% Chiselling	10% Drilling 90% Chiselling	10% Drilling 90% Chiselling	10% Drilling 90% Chiselling
Working direction									
Features	Drills up to **60pcs** Φ6×80mm holes in C40 concrete on one 4.0Ah battery charge	Drills up to **48pcs** Φ8×80mm holes in C40 concrete on one 4.0Ah battery charge	Drills up to **50pcs** Φ10×80mm holes in C40 concrete on one 4.0Ah battery charge	Drills up to **49pcs** Φ10×70mm holes in C40 concrete with a 4.0Ah battery pack	Drills up to **56pcs** Φ10×70mm holes in C40 concrete with a 4.0Ah battery pack	Drills up to **40pcs** Φ14×70mm holes in C40 concrete with a 4.0Ah battery pack	Drills up to **57pcs** Φ14×70mm holes in C40 concrete on one 6.0Ah battery charge	The drilling efficiency: about **20%** higher than AZC02-20	The drilling efficiency: about **10%** higher than competitors
Heavy Duty			HEAVY DUTY			HEAVY DUTY	HEAVY DUTY		
Recommended Application Scenarios Home decoration	★★★	★★★	★★★	★★★	★★★			★★★	★★★
Outdoor installation	★★★	★★★	★★★	★★★	★★	★★	★★	★	★
Steel drilling	★	★	★	★	★			★	★
Auxiliary planting of steel bars			★★	★★	★★	★★	★★	★★	★★
Medium anchor hole drilling						★★★	★★★		
Tile demolition	★	★	★	★	★	★★	★★	★	★
Reinforcement by planting steel bars						★★	★★		
Concrete demolition						★★	★★		

Pictures of application scenarios


Outdoor installation


Steel drilling


Auxiliary planting of steel bars


Medium anchor hole drilling



Tile demolition


Reinforcement by planting steel bars

The data comes from Dongcheng laboratory approved by CNAS/TUV , etc.The data is for reference only.

CONCRETE & MASONRY TOOLS

LIST OF PLANTING BAR, REINFORCEMENT SERIES



Pictures											
Models	AZC17-26	AZC17-26S	AZC13-26B	AZC03-28SH		AZC07-28	AZC10-28	AZC05-32	AZC03-38	AZC02-40	AZC45
Specifications Rated power Input	1050W	1050W	1050W	1100W		1150W	1050W	1500W	1100W	1250W	1500W
No-load Speed	980/min	980/min	1000/min	1300/min		1000/min	900/min	950/min	320/min	650/min	0-305/min
Rated Impact Frequency	4700/min	4700/min	4000/min	5000/min		4600/min	4300/min	4500/min	2900/min	3600/min	1370-2700/min
Impact Energy	4.0J	4.0J	2.7J	3.6J		3.8J	4.5J	6.0J	7.9J	13.0J	15.0J
Net Weight	4.0kg	4.0kg	4.0kg	5.2kg		4.5kg	4.8kg	5.2kg	6.2kg	6.7kg	8.2kg
Tool Holder	SDS-PLUS	SDS-PLUS	SDS-PLUS	SDS-PLUS		SDS-PLUS	SDS-PLUS	SDS-PLUS	SDS-Max	SDS-Max	SDS-Max
Drilling Diameter in concrete（mm）	6 8 18 26 (Total Range / Optimal)	6 8 18 26 (Total Range / Optimal)	6 8 18 26 (Total Range / Optimal)	6 8 18 28 (Total Range / Optimal)		6 8 20 28 (Total Range / Optimal)	6 8 20 28 (Total Range / Optimal)	8 12 22 32 (Total Range / Optimal)	10 18 32 38 (Total Range / Optimal)	10 20 32 38 (Total Range / Optimal)	10 24 40 45 (Total Range / Optimal)
Modes Drill Function		●					●	●			
Rotary Hammer function	●	●	●	●		●	●	●	●	●	●
Demolition Function	●	●	●	●		●	●	●	●	●	●
Adjustable Speed											●
Drilling/Chiselling ratio	20% Drilling / 80% Chiselling	20% Drilling / 80% Chiselling	20% Drilling / 80% Chiselling	20% Drilling / 80% Chiselling		20% Drilling / 80% Chiselling	20% Drilling / 80% Chiselling	20% Drilling / 80% Chiselling	30% Drilling / 70% Chiselling	30% Drilling / 70% Chiselling	40% Drilling / 60% Chiselling
Working direction	↳	↳	↳	↳		↳	↳	↳	↱	↱	↱
Features	Light-weight and high efficient	3-Mode operation D shape **26**mm rotary hammer	Light-weight and high efficient	The drilling efficiency: about **10%** higher than traditional ϕ25mm models		Light-weight and high efficiency	3-Mode operation D shape **28**mm rotary hammer	Powerful and high efficiency	Light-weight model: **22%** lighter than AZC38	Max.drilling capacity ϕ40mm	Max.drilling capacity Φ45mm
Heavy Duty				HEAVY DUTY		HEAVY DUTY	HEAVY DUTY	HEAVY DUTY	HEAVY DUTY	HEAVY DUTY	HEAVY DUTY
Recommended Application Scenarios Auxiliary planting of steel bars	★	★	★								
Fire pipeline installation	★★★	★★★	★★★	★★		★★	★★	★★	★		
Medium anchor hole drilling	★★★	★★★	★★★	★★★		★★★	★★★	★★★	★★	★	★
Waterproofing and plugging hole	★★	★★	★★	★★		★★	★★	★★	★★★	★★	★
Tile demolition	★★	★★	★★	★★		★★	★★	★★			
Reinforcement by planting steel bars				★★		★★	★★	★★	★★	★★★	★★
Engineering application				★★		★★	★★	★★	★★	★★	★★★
Concrete demolition	★	★	★	★★		★★	★★	★★	★★	★★	★★★

Pictures of application scenarios


Waterproofing and plugging hole


Tile demolition


Reinforcement by planting steel bars


Elevator installation


Concrete demolition

The data comes from Dongcheng laboratory approved by CNAS/TUV , etc.The data is for reference only.

*Specifications may differ from country to country.

CONCRETE & MASONRY TOOLS

AZC05-26B HAMMER DRILL



Rated Power Input	800W
Impact Energy	3.0J
No-load Speed	0-1200/min
Rated Impact Frequency	0-4000/min
Max. Drilling Capacity Concrete	Φ26mm
Net Weight	2.93kg

● SDS-Plus

Features

- Safety Clutch Function, automatically stop when the drill bit gets stuck;
- 3–Mode operation, drill, rotary hammer and demolition;
- One–button reversing and stepless speed adjustment.

Accessories & Package

- Auxiliary Handle
- Depth Gauge
- Carbon Brush
- Plastic Case Packing

AZC800-26B ELECTRIC ROTARY HAMMER



Rated Power Input	800W
Impact Energy	3.0J
No-load Speed	0-1100/min
Rated Impact Frequency	0-4200/min
Max. Drilling Capacity Concrete	Φ26mm
Net Weight	2.9kg

● SDS-Plus

Features

- 3–Mode operation, drill, rotary hammer and demolition;
- Safety Clutch Function, automatically stop when the drill bit gets stuck;
- One–button reversing and stepless speed adjustment.

Accessories & Package

- Auxiliary Handle
- Depth Gauge
- Carton Packing

AZC13-26B ELECTRIC ROTARY HAMMER



Rated Power Input	1050W
Impact Energy	2.7J
No-load Speed	1000/min
Rated Impact Frequency	4000/min
Max. Drilling Capacity Concrete	Φ26mm
Net Weight	4.0kg

● SDS-Plus

Features

- 1050W powerful motor;
- 2–Mode operation, rotary hammer and demolition;
- Safety Clutch Function, automatically stop when the drill bit gets stuck;
- DVR: Vibration Reduction Technology, improving operation comfort.

Accessories & Package

- Auxiliary Handle
- Plastic Case Packing

AZC03-28SH ELECTRIC ROTARY HAMMER



Rated Power Input	1100W
Impact Energy	3.6J
No-load Speed	1300/min
Rated Impact Frequency	5000/min
Max. Drilling Capacity Concrete	Φ28mm
Net Weight	5.2kg

● SDS-Plus

Features

- Safety Clutch Function, automatically stop when the drill bit gets stuck;
- DVR: Vibration Reduction Technology, improving operation comfort;
- 2–Mode operation, rotary hammer and demolition;
- Ergonomic rubberized handle, comfortable to hold.

Accessories & Package

- Grease
- Dust Cap
- O Ring(2pcs)
- Auxiliary Handle
- Depth Gauge
- Carbon Brush
- Plastic Case Packing

AZC17-26/ AZC17-26S ELECTRIC ROTARY HAMMER

1050W POWERFUL MOTOR



SAFETY CLUTCH FUNCTION
Automatically stop when the drill bit gets stuck

HIGH STRENGTH CHUCK
Effectively preventing the detachment of drill bit

FOUR FINGER TRIGGER SWITCH
Easy to operate

Rated Power Input		1050W
Impact Energy		4.0J
No-load Speed		980/min
Rated Impact Frequency		4700/min
Max. Drilling Capacity	Concrete	Φ26mm
Net Weight		4.0kg



Accessories & Package

- Auxiliary Handle
- Depth Gauge
- Plastic Case Packing

*Specifications may differ from country to country.

WORKS BETTER THAN YOU EXPECT

800W POWERFUL MOTOR

3-MODE OPERATION
Drill, rotary hammer and demolition

SAFETY CLUTCH FUNCTION
Automatically stop when the drill bit gets stuck



AZC800-26B
ELECTRIC ROTARY HAMMER

THE BEST PARTNER FOR PROFESSIONAL USERS

1100W POWERFUL MOTOR

2-MODE OPERATION
Rotary hammer and demolition

SAFETY CLUTCH FUNCTION
Automatically stop when the drill bit gets stuck

VIBRATION REDUCTION TECHNOLOGY
Improving operation comfort



AZC03-28SH
ELECTRIC ROTARY HAMMER

*Specifications may differ from country to country.

ENDLESS PURSUIT OF EFFICIENCY

1250W POWERFUL MOTOR

2-MODE OPERATION
Rotary hammer and demolition

SAFETY CLUTCH FUNCTION
Automatically stop when the drill bit gets stuck

VIBRATION REDUCTION TECHNOLOGY
Improving operation comfort

12J IMPACT ENERGY
Easy to complete demolition



AZC02-40
ELECTRIC ROTARY HAMMER

RELIABLE POWER, PRACTICAL PERFORMANCE

1050W POWERFUL MOTOR

3-MODE OPERATION
Drill, rotary hammer and demolition

SAFETY CLUTCH FUNCTION
Automatically stop when the drill bit gets stuck

HIGH STRENGTH CHUCK
Effectively preventing the detachment of drill bit



AZC10-28
ELECTRIC ROTARY HAMMER

*Specifications may differ from country to country.

RELIABLE POWER, PRACTICAL PERFORMANCE

1500W POWERFUL MOTOR

3-MODE OPERATION
Drill, rotary hammer and demolition

SAFETY CLUTCH FUNCTION
Automatically stop when the drill bit gets stuck

HIGH STRENGTH CHUCK
Effectively preventing the detachment of drill bit

HIGH PRECISION CYLINDER
Powerful impact and work efficiency



AZC05-32
ELECTRIC ROTARY HAMMER

AZC07-28 ELECTRIC ROTARY HAMMER



- SDS-Plus

Rated Power Input		1150W
Impact Energy		3.8J
No-load Speed		1000/min
Rated Impact Frequency		4600/min
Max. Drilling Capacity	Concrete	Φ28mm
Net Weight		4.5kg

Features

- Safety clutch function, automatically stop when the drill bit gets stuck;
- DVR: Vibration reduction technology, improving operation comfort;
- 2–Mode operation, rotary hammer and demolition;
- Four finger trigger switch, easy to operate.

Accessories & Package

- Auxiliary Handle • Plastic Case Packing

AZC10-28 ELECTRIC ROTARY HAMMER



- SDS-Plus

Rated Power Input		1050W
Impact Energy		4.5J
No-load Speed		900/min
Rated Impact Frequency		4300/min
Max. Drilling Capacity	Concrete	Φ28mm
Net Weight		4.8kg

Features

- 1050W high quality motor;
- Safety Clutch Function, automatically stop when the drill bit gets stuck;
- 3–Mode operation, drill, rotary hammer and demolition.

Accessories & Package

- Grease • Dust Cap • Wrench • Auxiliary Handle • Depth Gauge • Carbon Brush
- Plastic Case Packing

AZC05-32 ELECTRIC ROTARY HAMMER



- SDS-Plus

Rated Power Input		1050W
Impact Energy		6.0J
No-load Speed		950/min
Rated Impact Frequency		4500/min
Max. Drilling Capacity	Concrete	Φ32mm
Net Weight		5.2kg

Features

- 1050W high quality motor;
- Safety clutch function, automatically stop when the drill bit gets stuck;
- 3–Mode operation,drill, rotary hammer and demolition;
- DVR: Vibration reduction technology, improving operation comfort.

Accessories & Package

- Grease • Dust Cap • Wrench • Auxiliary Handle • Depth Gauge • Carbon Brush
- Plastic Case Packing

AZC03-38 ELECTRIC ROTARY HAMMER



- SDS-Max

Rated Power Input		1100W
Impact Energy		7.9J
No-load Speed		320/min
Rated Impact Frequency		2900/min
Max. Drilling Capacity	Concrete	Φ38mm
Net Weight		6.2kg

Features

- 2–Mode operation, rotary hammer and demolition;
- Safety Clutch Function, automatically stop when the drill bit gets stuck;
- SDS–MAX.

Accessories & Package

- Auxiliary Handle • Plastic Case Packing

AZC02-40 ELECTRIC ROTARY HAMMER



- SDS-Plus

Rated Power Input		1250W
Impact Energy		13J
No-load Speed		650/min
Rated Impact Frequency		4300/min
Max. Drilling Capacity	Concrete	Φ40mm
Net Weight		6.7kg

Features

- 1250W powerful motor; • 13J impact energy, easy to complete demolition;
- DVR: Vibration reduction technology, improving operation comfort;
- 2–Mode operation, rotary hammer and demolition;
- Safety clutch function, automatically stop when the drill bit gets stuck.

Accessories & Package

- Auxiliary Handle • Grease • Carbon Brush • Plastic Case Packing

AZC45 ELECTRIC ROTARY HAMMER



- SDS-Max

Rated Power Input		1500W
Impact Energy		15.0J
No-load Speed		0-305/min
Rated Impact Frequency		1370-2700/min
Max. Drilling Capacity	Concrete	Φ45mm
Net Weight		8.2kg

Features

- DVR: Vibration Reduction Technology, improving operation comfort;
- 2–Mode operation, rotary hammer and demolition;
- Safety Clutch Function, automatically, stop when the drill bit gets stuck;
- 6 Speed adjustment, applicable to different working conditions.

Accessories & Package

- Grease • Oil Absorber Cloth • Auxiliary Handle • Carbon Brush • Plastic Case Packing

RECOMMENDED ACCESSORIES

Hammer Drill Bit

No.	Specification (mm)	Shank Type	Product Code
1	Φ6×110	SDS-Plus	30270200048
2	Φ6×160	SDS-Plus	30270200001
3	Φ8×110	SDS-Plus	30270200105
4	Φ8×160	SDS-Plus	30270200002
5	Φ10×160	SDS-Plus	30270200003
6	Φ12×160	SDS-Plus	30270200049


- **Sharp Blade with High Hardless:**
  Durable & Wear-Resistant;
- **Optimal Heat Treatment Process:**
  For High Tenacity and Hardness;
- **U-Type Flute:**
  Smooth Chip Removal & Powerful Drilling.



*Specifications may differ from country to country.



LIST OF PERCUSSION HAMMER SERIES



Model	Product Picture	Specifications					Cylinder Diameter (mm)	DVR	Lubrication method	Variable speed	Recommended Applications	Features
		Rated Power Input (W)	Rated Impact Frequency (/min)	Impact Energy (J)	Net Weight (kg)	Tool Holder						
AZG5		1200	4500	9.0	5.7	HEX17	Φ30mm	●	Grease		Decoration & Slotting	Portable Efficient Durable
AZG6S		1050	2900	10.0	6.8	HEX17	Φ30mm		Grease		Decoration & Slotting	Portable Efficient Durable
AZG06-6B		1400	3900	16.0	6.8	HEX17	Φ35mm	●	Grease		Decoration & Slotting	Portable Efficient Durable
AZG08-6		1300	3000	12.0	6.0	HEX17	Φ35mm	●	Grease		Decoration & Slotting	Portable Efficient Durable
AZG10		1500	900-1890	16.0	10.4	SDS-MAX	Φ40mm		Grease	6-speed	Decoration, Slotting & Demolition	Multiple Portable Efficient Durable
AZG02-10		1500	1000-2000	20.0	10.0	SDS-MAX	Φ40mm	●	Grease	6-speed	Decoration, Slotting & Demolition	Multiple Portable Efficient Durable
AZG02-11		1600	1750	35.0	11.0	HEX30	Φ48mm	●	Grease		Decoration, Slotting & Demolition	Multiple Portable Efficient Durable
AZG02-15		1010	1400	40.7	16.0	HEX30	Φ45mm		Oil		Demolition	High impact capacity
AZG03-15S		1400	1400	50.0	15.0	HEX30	Φ45mm		Oil		Demolition	High impact capacity
AZG05-15		1600	1400	43.0	15.0	HEX30	Φ45mm		Oil		Demolition	High impact capacity
AZG07-15		1200	1300	38.0	14.5	HEX30	Φ45mm		Oil		Demolition	High impact capacity
AZG16		1700	1300	45.0	18.8	HEX30	Φ58mm		Grease		Demolition	High impact capacity
AZG02-16		1600	1500	43.2	18.0	HEX30	Φ55mm	●	Grease		Demolition	High impact capacity

*The data comes from DongCheng Laboratory approved by CNAS/TUV,etc.The data is for reference only.

AZG5 PERCUSSION HAMMER



Rated Power Input	1200W
Impact Energy	9.0J
Rated Impact Frequency	4500/min
Net Weight	5.7kg

● Hex · 17mm

Features

- 32mm diameter cylinder, delivering strong demolition force;
- Heat-insulating cylinder liner design keeps the tool cool to the touch even during prolonged use;
- DVR: Vibration reduction technology, improving operation comfort.

Accessories & Package

- Auxiliary Handle · Plastic Case Packing

AZG6S PERCUSSION HAMMER



Rated Power Input	1050W
Impact Energy	10.0J
Rated Impact Frequency	2900/min
Net Weight	6.8kg

● Hex · 17mm

Features

- High strength sleeve, sturdy and durable;
- High quality piston rubber ring;
- Vibration reduction design, improving operation comfort.

Accessories & Package

- Grease · Auxiliary Handle · Special Wrench · Carbon Brush · Plastic Case Packing

AZG06-6B PERCUSSION HAMMER



Rated Power Input	1400W
Impact Energy	16.0J
Rated Impact Frequency	3900/min
Net Weight	6.8kg

● Hex · 17mm

Features

- 1400W powerful motor;
- DVR: Vibration Reduction Technology, improving operation comfort;
- 35mm diameter cylinder, strong crushing capacity;
- High strength sleeve, sturdy and durable.

Accessories & Package

- Grease · Auxiliary Handle · Special Wrench · Carbon Brush · Plastic Case Packing

AZG08-6 PERCUSSION HAMMER



Rated Power Input	1300W
Impact Energy	12.0J
Rated Impact Frequency	3000/min
Net Weight	6.0kg

● Hex · 17mm

Features

- 1300W powerful motor;
- 12J impact energy, easy to complete demolition;
- High strength sleeve, sturdy and durable;
- DVR: Vibration Reduction Technology, improving operation comfort.

Accessories & Package

- Auxiliary Handle · Plastic Case Packing



AZG10 PERCUSSION HAMMER



Rated Power Input	1500W
Impact Energy	16.0J
Rated Impact Frequency	900-1890/min
Net Weight	10.4kg

● SDS-Max

Features

- 1500W powerful motor;
- 6 Speed adjustment, applicable to different working conditions;
- Lock-on switch, for continuous chiseling;
- High strength sleeve, sturdy and durable.

Accessories & Package

- Grease · Auxiliary Handle · Hex Wrench · Carbon Brush · Plastic Case Packing

AZG02-10 PERCUSSION HAMMER



Rated Power Input	1500W
Impact Energy	20.0J
Rated Impact Frequency	1000-2000/min
Net Weight	10.0kg

● SDS-Max

Features

- 1500W powerful motor;
- 6 Speed adjustment, applicable to different working conditions;
- Lock-on switch, for continuous chiseling;
- DVR: Vibration reduction technology, improving operation comfort.

Accessories & Package

- Grease · Auxiliary Handle · Hex Wrench · Carbon Brush · Plastic Case Packing

AZG02-11 PERCUSSION HAMMER



Rated Power Input	1600W
Impact Energy	35.0J
Rated Impact Frequency	1750/min
Net Weight	11.0kg

● Hex · 30mm

Features

- 1600W powerful motor;
- Lock-on switch, for continuous chiseling;
- DVR: Vibration reduction technology, improving operation comfort.

Accessories & Package

- Grease · Auxiliary Handle · Carbon Brush · Plastic Case Packing

UNIQUE DEMOLITION WORKING WISE

1500W POWERFUL MOTOR

6 SPEED ADJUSTMENT
Applicable to different working conditions

HIGH STRENGTH SLEEVE
Sturdy and durable

VIBRATION REDUCTION TECHNOLOGY
Improving operation comfort

20J IMPACT ENERGY
Easy to complete demolition



AZG02-10
PERCUSSION HAMMER

*Specifications may differ from country to country.

AZG02-15 PERCUSSION HAMMER



Rated Power Input	1010W
Impact Energy	40.7J
Rated Impact Frequency	1400/min
Net Weight	16.0kg

Hex · 30mm

Features
- Double insulated;
- Trigger switch with lock–on button, suitable for long time use;
- Hex 30mm.

Accessories & Package
- Oiler · Hex Wrench (2pcs) · Wrench · Carbon Brush · Iron Carrying Case

AZG03-15S PERCUSSION HAMMER



Rated Power Input	1400W
Impact Energy	50.0J
Rated Impact Frequency	1400/min
Net Weight	15.0kg

Hex · 30mm

Features
- 1400W powerful motor; · 45mm diameter cylinder, delivering strong demolition force;
- High strength sleeve, sturdy and durable;
- Trigger switch with lock–on button, suitable for long time use.

Accessories & Package
- Oiler · Hex Wrench (2pcs) · Wrench · Carbon Brush · Iron Carrying Case

AZG05-15 PERCUSSION HAMMER



Rated Power Input	1600W
Impact Energy	43J
Rated Impact Frequency	1400/min
Net Weight	15.0kg

Hex · 30mm

Features
- 1600W powerful motor;
- 43J impact energy, easy to complete demolition;
- Double insulation, for greater safety;
- Trigger switch with lock–on button, suitable for long time use.

Accessories & Package
- Olier · Iron Carrying Case

AZG07-15 PERCUSSION HAMMER



Rated Power Input	1200W
Impact Energy	38J
Rated Impact Frequency	1300/min
Net Weight	14.5kg

Hex · 30mm

Features
- 1200W powerful motor;
- 38J impact energy, easy to complete demolition;
- Double insulation, for greater safety
- High strength sleeve, sturdy and durable.

Accessories & Package
- Oiler · Wrench · Hex Wrench · Iron Carrying Case

AZG16 PERCUSSION HAMMER



Rated Power Input	1700W
Impact Energy	45J
Rated Impact Frequency	1300/min
Net Weight	18.8kg

Hex · 30mm

Features
- 1700W powerful motor;
- 45J impact energy, easy to complete demolition;
- Effectively vibration control system;
- Continuous demolition working at one–touch.

Accessories & Package
- Grease · Auxiliary Handle · Hex Wrench · Carbon Brush · Plastic Case Packing

AZG02-16 PERCUSSION HAMMER



Rated Power Input	1600W
Impact Energy	43.2J
Rated Impact Frequency	1500/min
Net Weight	18.0kg

Hex · 30mm

Features
- 1600W powerful motor;
- 43.2J impact energy, easy to complete demolition;
- High strength sleeve, sturdy and durable;
- Trigger switch with lock–on button, suitable for long time use.

Accessories & Package
- Grease · Hex Wrench · Plastic Case Packing


RECOMMENDED ACCESSORIES

Chisels

No.	Specification (mm)	Shank Type	Model	Product Code
1	Φ14×250	SDS-Plus	Point Chisel	30270300010
2	Φ14×250	SDS-Plus	Flat Chisel	30270300009
3	Φ17×280	Hex	Flat Chisel	30270300004
4	Φ17×280	Hex	Point Chisel	30270300001
5	Φ18×400	SDS-Max	Flat Chisel	30170300020
6	Φ18×400	SDS-Max	Point Chisel	30270300007



ANGLE GRINDERS OVERVIEW



PRODUCTS						RATED POWER INPUT(W)	SWITCH	AUTO-STOP CARBON BRUSH	ADJUSTABLE SPEED	ELECTRONIC CONSTANT SPEED	CONSTANT POWER	SLIM BODY	OPTIMAL APPLICATIONS	HEAVY DUTY	SPECIAL FEATURES
100mm(4")	115mm(4-1/2")	125mm(5")	150mm(6")	180mm(7")	230mm(9")										
ASM05-100B						850W	Slide Switch						Metal Working		Optional function: Power-off protection
ASM10-100						1020W	Slide Switch		●		●		Cutting	HEAVY DUTY	Optional function: Power-off protection
ASM18-100						860W	Slide Switch					Slim Body	Metal Working		Optional function: Power-off protection
ASM18-100B						860W	Rear Toggle Switch					Slim Body	Metal Working		
ASM22-100						1100W	Slide Switch					Slim Body	Metal Working	HEAVY DUTY	Optional function: Power-off protection
ASM22-100B						1100W	Rear Toggle Switch					Slim Body	Metal Working	HEAVY DUTY	
ASM24-100						750W	Slide Switch					Slim Body	Metal Working		Optional function: Power-off protection
ASM24-100B						750W	Rear Toggle Switch					Slim Body	Metal Working		
	ASM03-115					850W	Slide Switch						Metal Working		Optional function: Power-off protection
	ASM07-115					1020W	Slide Switch		●		●		Cutting	HEAVY DUTY	Optional function: Power-off protection
	ASM18-115					860W	Slide Switch					Slim Body	Metal Working		Optional function: Power-off protection
	ASM22-115					1100W	Slide Switch					Slim Body	Metal Working	HEAVY DUTY	Optional function: Power-off protection
	ASM24-115					750W	Slide Switch					Slim Body	Metal Working		Optional function: Power-off protection
		ASM125A				850W	Slide Switch						Metal Working		Optional function: Power-off protection
		ASM02-125S				1200W	Trigger Switch						Metal Working		
		ASM04-125				1020W	Slide Switch		●		●		Metal Working	HEAVY DUTY	Optional function: Power-off protection
		ASM08-125H				1020W	Trigger Switch						Metal Working		
		ASM22-125				1100W	Slide Switch					Slim Body	Metal Working	HEAVY DUTY	Optional function: Power-off protection
			ASM150S			1200W	Trigger Switch						Metal Working		
				ASM180B		2600W	Trigger Switch	●					Stone Working		Optional function: soft start
				ASM03-180		2200W	Trigger Switch						Metal Working		Optional function: soft start
				ASM08-180		2200W	Trigger Switch						Metal Working		Optional function: Power-off protection
					ASM230B	2600W	Trigger Switch	●					Stone Working		Optional function: soft start
					ASM03-230	2200W	Trigger Switch						Metal Working		Optional function: soft start
					ASM08-230	2200W	Trigger Switch						Metal Working		Optional function: Power-off protection

*Specifications may differ from country to country.

GRINDING & SANDING & POLISHING

ULTRA-SLIM AND POWERFUL

YouTube Watch Video

860W POWERFUL MOTOR
Efficient and high overload resistance

HIGH STRENGTH GEARS
For long service life

178mm ULTRA SLIM BODY
Comfortable to hold and easy to control

LABYRINTH DUSTPROOF STRUCTURE
Effectively extending the lifetime of products



ASM18-100/100B/115
ANGLE GRINDER

*Specifications may differ from country to country.

ASM05-100B(4") ANGLE GRINDER



Rated Power Input	850W
Max. Wheel Dia.	Φ100mm
Rated Speed	13000/min
Spindle Thread	M10
Net Weight	1.7kg

● Optional Function: Power-off Protection

Features
- 850W high quality motor ;
- Labyrinth dustproof structure, effectively extending the lifetime of products;
- High strength gears, for long service life.

Accessories & Package
- Auxiliary Handle • Wheel Guard • Wrench • Carbon Brush • Carton Packing

ASM10-100(4") ANGLE GRINDER



Rated Power Input	1020W
Max. Wheel Dia.	Φ100mm
Rated Speed	4200-13000/min
Spindle Thread	M10
Net Weight	2.1kg

● Optional Function: Power-off Protection

Features
- 1020W powerful motor;
- 6–speed adjustment, applicable to different working conditions;
- Constant output power, maintaining constant power under load;
- High strength gears, for long service life.

Accessories & Package
- Auxiliary Handle • Wheel Guard • Wrench • Carbon Brush • Carton Packing

ASM18-100(4") ANGLE GRINDER



Rated Power Input	860W
Max. Wheel Dia.	Φ100mm
Rated Speed	13000/min
Spindle Thread	M10
Net Weight	1.4kg

● Optional Function: Power-off Protection

Features
- 860W powerful motor, efficient and high overload resistance;
- 178mm ultra slim body, comfortable to hold and easy to control;
- Labyrinth dustproof structure, effectively extending the lifetime of products;
- High strength gears, for long service life.

Accessories & Package
- Auxiliary Handle • Wheel Guard • Wrench • Carton Packing

ASM18-100B(4") ANGLE GRINDER



Rated Power Input	860W
Max. Wheel Dia.	Φ100mm
Rated Speed	13000/min
Spindle Thread	M10
Net Weight	1.4kg

Features
- 860W powerful motor, efficient and high overload resistance;
- 178mm ultra slim body, comfortable to hold and easy to control;
- Labyrinth dustproof structure, effectively extending the lifetime of products;
- High strength gears, for long service life.

Accessories & Package
- Wheel Guard • Wrench • Carton Packing

GRINDING & SANDING & POLISHING

ASM22-100(4")/100B(4")/115(4-1/2")/125(5") ANGLE GRINDER

NEW

LABYRINTH DUSTPROOF STRUCTURE
Effectively extending the lifetime of products

1100W POWERFUL MOTOR
Efficient and highoverload resistance



186mm ULTRA SLIM BODY
Comfortable to hold and easy to control

HIGH STRENGTH GEARS
For long lifetime

Rated Power Input	1100W
Max. Wheel Dia.	Φ100/Φ100/Φ115/Φ125mm
Rated Speed	13000/13000/11800/11800/min
Spindle Thread	M10/M10/M14/M14
Net Weight	1.7/1.7/1.8/1.9kg

Accessories & Package
- Auxiliary Handle • Wrench • Wheel Guard • Carton Packing



ASM24-100(4") ANGLE GRINDER



Rated Power Input	750W
Max. Wheel Dia.	Φ100mm
Rated Speed	13000/min
Spindle Thread	M10
Net Weight	1.6kg

Features

- 750W powerful motor, efficient and high overload resistance;
- 186mm ultra slim body, comfortable to hold and easy to control;
- Labyrinth dustproof structure, effectively extending the lifetime of products;
- High strength gears, for long lifetime.

Accessories & Package

- Auxiliary Handle · Wheel Guard · Wrench · Carton Packing

ASM24-100B(4") ANGLE GRINDER



Rated Power Input	750W
Max. Wheel Dia.	Φ100mm
Rated Speed	13000/min
Spindle Thread	M10
Net Weight	1.6kg

Features

- 750W powerful motor, efficient and high overload resistance;
- 186mm ultra slim body, comfortable to hold and easy to control;
- Labyrinth dustproof structure, effectively extending the lifetime of products;
- High strength gears, for long lifetime.

Accessories & Package

- Wheel Guard · Wrench · Carton Packing

ASM03-115(4-1/2") ANGLE GRINDER



Rated Power Input	850W
Max. Wheel Dia.	Φ115mm
Rated Speed	11800/min
Spindle Thread	M14
Net Weight	1.8kg

● Optional Function: Power-off Protection

Features

- 850W high quality motor;
- Labyrinth dustproof structure, effectively extending the lifetime of products;
- High strength gears, for long service life.

Accessories & Package

- Auxiliary Handle · Wheel Guard · Wrench · Carbon Brush · Carton Packing

ASM07-115(4-1/2") ANGLE GRINDER



Rated Power Input	1020W
Max. Wheel Dia.	Φ115mm
Rated Speed	4200-11800/min
Spindle Thread	M14
Net Weight	2.1kg

● Optional Function: Power-off Protection

Features

- 1020W powerful motor;
- 6–speed adjustment, applicable to different working conditions;
- Constant output power, maintaining constant power under load;
- High strength gears, for long service life.

Accessories & Package

- Auxiliary Handle · Wheel Guard · Wrench · Carbon Brush · Carton Packing

ASM18-115(4-1/2") ANGLE GRINDER



Rated Power Input	860W
Max. Wheel Dia.	Φ115mm
Rated Speed	11800/min
Spindle Thread	M14
Net Weight	1.6kg

● Optional Function: Power-off Protection

Features

- 860W powerful motor, efficient and high overload resistance;
- 178mm ultra slim body, comfortable to hold and easy to control;
- Labyrinth dustproof structure, effectively extending the lifetime of products;
- High strength gears, for long service life.

Accessories & Package

- Auxiliary Handle · Wheel Guard · Wrench · Carton Packing

ASM24-115(4-1/2") ANGLE GRINDER



Rated Power Input	750W
Max. Wheel Dia.	Φ115mm
Rated Speed	11800/min
Spindle Thread	M14
Net Weight	1.7kg

Features

- 750W powerful motor, efficient and high overload resistance;
- 186mm ultra slim body, comfortable to hold and easy to control;
- Labyrinth dustproof structure, effectively extending the lifetime of products;
- High strength gears, for long lifetime.

Accessories & Package

- Auxiliary Handle · Wheel Guard · Wrench · Carton Packing

ASM125A(5") ANGLE GRINDER



Rated Power Input	850W
Max. Wheel Dia.	Φ125mm
Rated Speed	11800/min
Spindle Thread	M14
Net Weight	1.8kg

● Optional Function: Power-off Protection

Features

- 850W high quality motor;
- Labyrinth dustproof structure, effectively extending the lifetime of products;
- High strength gears, for long service life.

Accessories & Package

- Auxiliary Handle · Wheel Guard · Wrench · Carbon Brush · Carton Packing

ASM02-125S(5") ANGLE GRINDER



Rated Power Input	1200W
Max. Wheel Dia.	Φ125mm
Rated Speed	11800/min
Spindle Thread	M14
Net Weight	3.1kg

Features

- 1200W high quality motor;
- Labyrinth dustproof structure, effectively extending the lifetime of products;
- High strength gears, for long service life;
- External carbon brush, convenient for replacement.

Accessories & Package

- Auxiliary Handle · Wheel Guard · Wrench · Carbon Brush · Carton Packing

 *Specifications may differ from country to country.

COMFORTABLE OPERATION AND SOLID PERFORMANCE

750W POWERFUL MOTOR
Efficient and high overload resistance

HIGH STRENGTH GEARS
For long service life

186mm ULTRA SLIM BODY
Comfortable to hold and easy to control

LABYRINTH DUSTPROOF STRUCTURE
Effectively extending the lifetime of products



ASM24-100/100B/115

ANGLE GRINDER

ASM04-125(5") ANGLE GRINDER



Rated Power Input	1020W
Max. Wheel Dia.	Φ125mm
Rated Speed	4200-11800/min
Spindle Thread	M14
Net Weight	2.1kg

● Optional Function: Power-off Protection

Features

- 1020W powerful motor;
- 6–speed adjustment, applicable to different working conditions;
- Constant output power, maintaining constant power under load;
- High strength gears, for long service life.

Accessories & Package

- Auxiliary Handle - Wheel Guard - Wrench - Carbon Brush - Carton Packing

ASM08-125H(5") ANGLE GRINDER



Rated Power Input	1020W
Max. Wheel Dia.	Φ125mm
Rated Speed	11800/min
Spindle Thread	M14
Net Weight	2.1kg

Features

- 1020W powerful motor, suitable for heavy–duty working conditions;
- Long handle design, convenient operation;
- Trigger switch with lock–on button, suitable for long time use;
- Efficient heat dissipation air vents, effectively extending the lifetime of products.

Accessories & Package

- Auxiliary Handle - Wheel Guard - Wrench - Carbon Brush - Carton Packing

ASM150S(6") ANGLE GRINDER



Rated Power Input	1200W
Max. Wheel Dia.	Φ150mm
Rated Speed	9000/min
Spindle Thread	M14
Net Weight	3.2kg

Features

- 1200W high quality motor;
- Labyrinth dustproof structure, effectively extending the lifetime of products;
- High strength gears, for long service life;
- External carbon brush, convenient for replacement.

Accessories & Package

- Auxiliary Handle - Wheel Guard - Wrench - Carbon Brush - Carton Packing



ASM180B(7") ANGLE GRINDER



Rated Power Input	2600W
Max. Wheel Dia.	Φ180mm
Rated Speed	8400/min
Spindle Thread	M14
Net Weight	5.8kg

● Optional Function:Soft Start

Features

- 2600W powerful motor, efficient and high overload resistance;
- Four–finger trigger switch with lock–on button, comfortable to grip and suitable for long time use;
- Auto stop carbon brush, effectively extending the lifetime of motor.

Accessories & Package

- Auxiliary Handle - Wrench - Wheel Guard - Carbon Brush - Carton Packing

ASM03-180(7") ANGLE GRINDER



Rated Power Input	2200W
Max. Wheel Dia.	Φ180mm
Rated Speed	8300/min
Spindle Thread	M14
Net Weight	5.0kg

● Optional Function:Soft Start

Features

- 2200W powerful motor, suitable for heavy–duty working conditions;
- Rotatable rear handle, position to suit most cutting and grinding operations;
- Four–finger trigger switch with lock–on button, comfortable to grip and suitable for long time use;
- External carbon brush, convenient for replacement.

Accessories & Package

- Auxiliary Handle - Wheel Guard - Wrench - Carbon Brush - Carton Packing

ASM08-180(7") ANGLE GRINDER



Rated Power Input	2200W
Max. Wheel Dia.	Φ180mm
Rated Speed	8400/min
Spindle Thread	M14
Net Weight	4.4kg

● Optional Function:Soft Start

Features

- 2200W powerful brushless motor, efficient and high overload resistance;
- Labyrinth dustproof structure, effectively extending the lifetime of products;
- Four–finger trigger switch with lock–on button, comfortable to grip and suitable for long time use.

Accessories & Package

- Auxiliary Handle - Wheel Guard - Wrench - Carton Packing

ASM230B(9") ANGLE GRINDER



Rated Power Input	2600W
Max. Wheel Dia.	Φ230mm
Rated Speed	6600/min
Spindle Thread	M14
Net Weight	5.8kg

● Optional Function:Soft Start

Features

- 2600W powerful motor, efficient and high overload resistance;
- Four–finger trigger switch with lock–on button, comfortable to grip and suitable for long time use;
- Auto stop carbon brush, effectively extending the lifetime of motor.

Accessories & Package

- Auxiliary Handle - Wrench - Wheel Guard - Carbon Brush - Carton Packing

*Specifications may differ from country to country.

GOOD BALANCE OF POWER AND EFFICIENCY

1200W HIGH QUALITY MOTOR
Efficient and high overload resistance

EXTERNAL CARBON BRUSH
Convenient replacement

FOUR-FINGER TRIGGER SWITCH WITH LOCK-ON BUTTON
Comfortable to grip and suitable for long time use

LABYRINTH DUSTPROOF STRUCTURE
Effectively extending the lifetime of products



ASM150S(6")

ANGLE GRINDER

A GREAT HELPER IN STONE PROCESSING

2600W POWERFUL MOTOR
Efficient and high overload resistance

AUTO STOP CARBON BRUSH
Effectively extending the lifetime of motor

HIGH STRENGTH GEARS
For long service life

LABYRINTH DUSTPROOF STRUCTURE
Effectively extending the lifetime of products

FOUR-FINGER TRIGGER SWITCH WITH LOCK-ON BUTTON
Comfortable to grip and suitable for long time use



ASM180B(7")/230B(9")
ANGLE GRINDER

*Specifications may differ from country to country.

ASM03-230(9") ANGLE GRINDER



Rated Power Input	2200W
Max. Wheel Dia.	Φ230mm
Rated Speed	6600/min
Spindle Thread	M14
Net Weight	5.0kg

● Optional Function:Soft Start

Features
- 2200W powerful motor, suitable for heavy-duty working conditions;
- Rotatable rear handle, position to suit most cutting and grinding operations;
- Four-finger trigger switch with lock-on button, comfortable to grip and suitable for long time use;
- External carbon brush, convenient for replacement.

Accessories & Package
- Auxiliary Handle • Wheel Guard • Wrench • Carbon Brush • Carton Packing

ASM08-230(7") ANGLE GRINDER



Rated Power Input	2200W
Max. Wheel Dia.	Φ230mm
Rated Speed	6600/min
Spindle Thread	M14
Net Weight	4.4kg

● Optional Function:Soft Start

Features
- 2200W powerful brushless motor, efficient and high overload resistance;
- Labyrinth dustproof structure, effectively extending the lifetime of products;
- Four-finger trigger switch with lock-on button, comfortable to grip and suitable for long time use.

Accessories & Package
- Auxiliary Handle • Wheel Guard • Wrench • Carton Packing

RECOMMENDED ACCESSORIES

Cut off wheel & Grinding wheel

No.	Specification (mm)	Material	Colour	Net	Product Code
1	105×1.2×16	A46T-BF	BLACK	Double	30272100008
2	105×1.2×16	A46T-BF	GREEN	Double	30272100009
3	107×1.0×16	A46T-BF	GREEN	Double	30272100014



No.	Specification (mm)	Material	Packing (pcs)	Product Code
1	100×6×16	A24R-BF	200	30270500013
2	115×6×22.23	A24R-BF	150	30270500011
3	125×6×22.23	A24R-BF	150	30270500012



ASP02-180S POLISHER



Rated Power Input	950W
No-load Speed	600-2100/min
Wheel Size	Φ180mm
Spindle Thread	M14
Net Weight	2.3kg

Features
- 950W powerful motor, efficient and high overload resistance;
- 6- speed adjustment, meeting different working requirements;
- Motor-Over-Pad design, for great balance and control;
- Electronic constant speed, for uniform polishing.

Accessories & Package
- Wool Bonnet • Wrench • Auxiliary Handle • Carton Packing

ASP04-180 POLISHER



Rated Power Input	1400W
No-load Speed	690-3800/min
Wheel Size	Φ180mm
Spindle Thread	M14
Net Weight	3.4kg

Features
- 1400W powerful motor;
- 6- speed adjustment, meeting different working requirements;
- Electronic constant speed, for uniform polishing.

Accessories & Package
- Wool Bonnet • Hex Wrench • Carbon Brush • Carton Packing



ASP06-180 POLISHER

2.4kg LIGHTWEIGHT BODY
30% lighter than conventional polisher

ELECTRONIC CONSTANT SPEED
For uniform polishing



6- SPEED ADJUSTMENT (600/1000/1500/2000/2500/3000/min)
Meeting different working requirements

POWER-OFF PROTECTION
Effectively protecting the surface of workpieces

FOUR-FINGER TRIGGER SWITCH WITH LOCK-ON BUTTON

Rated Power Input	1400W
No-load Speed	600-3000/min
Wheel Size	Φ180mm
Spindle Thread	M14
Net Weight	2.4kg

Accessories & Package
• Polishing Sponge • Hex Wrench • Auxiliary Handle • Socket Head Cap Screw
• Carbon Brush • Carton Packing



ASN100 GRINDING POLISHER



Rated Power Input	1400W
No-load Speed	690-3800/min
Wheel Size	Φ120×100mm
Net Weight	4.7kg

Features
• 6–speed adjustment, meeting different working conditions;
• Electronic constant speed control, to maintain constant speed under load;
• Efficient heat dissipation air vents, effectively extending the lifetime of products.

Accessories & Package
• Auxiliary Handle • Wrench • Polishing Wheel Assembly • Carbon Brush

ASJ02-10 DIE GRINDER



Rated Power Input	105W
No-load Speed	33000 /min
Max. Collet Size	3mm
Max. Grinding Wheel Dia.	Φ10mm
Net Weight	0.6kg

Features
• Short neck design, for increased maneuverability;
• Rocker switch with lock–on, for convenient operation;
• Metal hanging hook, for increased convenience;
• External carbon, brush convenient for replacement.

Accessories & Package
• Special Wrench • Collet Chuck • Carbon Brush • Carton Packing

*Specifications may differ from country to country.

ASJ25B DIE GRINDER



Rated Power Input	240W
No-load Speed	26000/min
Max. Collet Size	6mm
Max. Grinding Wheel Dia.	Φ25mm
Net Weight	1.2kg

Features
• Efficient heat dissipation air vents, effectively extending the lifetime of machine;
• High strength metal chuck, robust and durable;
• Ergonomic slender body, for increased maneuverability;
• Metal hanging hook, for increased convenience.

Accessories & Package
• Large Wrench • Small Wrench • Collet Chuck • Carbon Brush • Carton Packing

ASJ02-25 DIE GRINDER



Rated Power Input	400W
No-load Speed	27000/min
Max. Collet Size	6mm
Max. Grinding Wheel Dia.	Φ25mm
Net Weight	1.8kg

Features
• Aluminum spindle housing, sturdy and durable;
• Round collet nut, reducing the risk of damage to the work piece;
• Efficient heat dissipation air vents, effectively extending the lifetime of machine;
• Rear toggle switch, effectively preventing dust and accidental touch.

Accessories & Package
• Large Wrench • Small Wrench • Collet Chuck x 2 • Gear Housing Sheath • Carbon Brush • Carton Packing

ASJ04-25 DIE GRINDER



Rated Power Input	260W
No-load Speed	26700/min
Max. Collet Size	6mm
Max. Grinding Wheel Dia.	Φ25mm
Net Weight	1.3kg

Features
• Aluminum spindle housing, sturdy and durable;
• High strength metal chuck, robust and durable;
• Short neck design, for increased maneuverability;
• Efficient heat dissipation air vents, effectively extending the lifetime of machine.

Accessories & Package
• Chuck Wrench • Carbon Brush • Carton Packing

ASJ04-25E DIE GRINDER



Rated Power Input	260W
No-load Speed	13000-26700/min
Max. Collet Size	6mm
Max. Grinding Wheel Dia.	Φ25mm
Net Weight	1.1kg

Features
• Aluminum spindle housing, sturdy and durable;
• 6–speed adjustment, applicable to different working conditions;
• Short neck design, for increased maneuverability;
• Efficient heat dissipation air vents, effectively extending the lifetime of machine.

Accessories & Package
• Chuck Wrench • Carbon Brush • Carton Packing

ASJ05-25 DIE GRINDER



Rated Power Input	550W
No-load Speed	9000-26700/min
Max. Collet Size	6mm
Max. Grinding Wheel Dia.	Φ25mm
Net Weight	1.6kg

Features
• Aluminum spindle housing, sturdy and durable;
• Round collet nut, reducing the risk of damage to the work piece;
• Efficient heat dissipation air vents, effectively extending the lifetime of machine;
• 6–speed adjustment, applicable to different working conditions.

Accessories & Package
• Large Wrench • Collet Chuck × 2 • Gear Housing Sheath • Carbon Brush • Carton Packing

ASJ06-25 DIE GRINDER



Rated Power Input	750W
No-load Speed	3800-8300/min
Max. Collet Size	6mm
Max. Grinding Wheel Dia.	Φ25mm
Net Weight	1.6kg

Features
• Aluminum spindle housing, sturdy and durable;
• Round collet nut, reducing the risk of damage to the work piece;
• Efficient heat dissipation air vents, effectively extending the lifetime of machine;
• 6–speed adjustment, applicable to different working conditions.

Accessories & Package
• Special Wrench • Large Wrench • Collet Chuck × 2 • Carbon Brush • Carton Packing

ASA125 RANDOM ORBIT SANDER



Rated Power Input	300W
Orbits Frequency	4000-12000/min
Pad Size	Φ125mm
Net Weight	1.4kg

Features
• 6–speed adjustment, meeting different working conditions;
• 3mm large random orbit action, for high removal rate;
• Efficient through–the–pad dust collection system, for a cleaner work environment.

Accessories & Package
• Dust Bag • Carbon Brush • Carton Packing



ASB03-100S ORBITAL SANDER



Rated Power Input	240W
Orbits Frequency	14000/min
Pad Size	100×110mm
Net Weight	1.2kg

Features

- Rubberized body, more comfortable to hold;
- External carbon brush, convenient for replacement;
- Large clamping lever, for quick and easy paper installation.

Accessories & Package

- Carton Packing

ASB185B ORBITAL SANDER



Rated Power Input	200W
Orbits Frequency	11000/min
Pad Size	93×185mm
Net Weight	1.6kg

Features

- Trigger switch with lock-on button, suitable for long-time use;
- Efficient heat dissipation air vents, effectively extending the lifetime of products;
- Clamping lever, for quick and easy paper installation.

Accessories & Package

- Carbon Brush
- Carton Packing

ASB03-185 ORBITAL SANDER



EFFICIENT HEAT DISSIPATION AIR VENTS
Effectively extending the lifetime of products



LOW VIBRATION DESIGN
Reducing arm fatigue





TRIGGER SWITCH WITH LOCK-ON BUTTON
Suitable for long-time use

LARGE CLAMPING LEVER
For quick and easy paper installation

Rated Power Input	320W
Orbits Frequency	14000/min
Pad Size	93×185mm
Net Weight	1.7kg

Accessories & Package

- Carton Packing



ASB234 ORBITAL SANDER



Rated Power Input	520W
Orbits Frequency	10000/min
Pad Size	114×234mm
Net Weight	2.9kg

Features

- Trigger switch with lock-on button, suitable for long time use;
- Efficient heat dissipation air vents, effectively extending the lifetime of products;
- Large clamping lever, for quick and easy paper installation.

Accessories & Package

- Carbon Brush
- Carton Packing

AST610 BELT SANDER



Rated Power Input	1200W
Belt Speed	500m/min
Belt Size	100×610mm
Net Weight	5.8kg

Features

- Trigger switch with lock-on button, suitable for long time use;
- External carbon brush, convenient for replacement;
- Efficient heat dissipation air vents, effectively extending the lifetime of products.

Accessories & Package

- Abrasive Belt (Ap80)
- Dust Bag Assembly
- Carbon Brush
- Carton Packing

ASF02-180 DRYWALL SANDER



Rated Power Input	750W
No-load Speed	1500-2700/min
Grinding Disc Dia.	Φ180mm
Net Weight	2.3kg

Features

- Self-vacuum function, effectively purifying the operating environment;
- LED light strip design, 360° dead-zone free;
- Adjustment speed, meeting different working conditions;
- Efficient heat dissipation air vents, effectively extending the lifetime of products.

Accessories & Package

- Auxiliary Handle
- Dust Cleaning Hose Assembly
- Dust Bag
- Cannulate Sockolet
- Abrasive Paper Assembly
- Carbon Brush
- Carton Packing

ASF04-180 DRYWALL SANDER



Rated Power Input	810W
No-load Speed	900-2100/min
Grinding Disc Dia.	Φ180mm
Net Weight	2.6kg

Features

- 810W high quality motor;
- Efficient heat dissipation air vents, effectively extending the lifetime of products;
- LED light strip design, 360° dead-zone free;
- Self-vacuum function, effectively purifying the operating environment.

Accessories & Package

- Dust Cleaning Hose Assembly
- Dust Bag
- Abrasive Paper Assembly (5 pcs)
- Auxiliary Handle
- Hex Wrench
- Self-sealing Bag
- Carbon Brush
- Dust-proof Pads (2pcs)
- Steel Washers (2pcs)
- Carton Packing

ASF05-225 DRYWALL SANDER

SELF-VACUUM FUNCTION
Effectively purifying the operating environment

LED LIGHT STRIP DESIGN
360° dead-zone free



ADJUSTABLE SPEED
Meeting different working conditions

820W POWERFUL MOTOR
Efficient and high overload resistance

Rated Power Input	820W
No-load Speed	1150-1950/min
Grinding Disc Dia.	Φ225mm
Net Weight	3.3kg (Without Telescopic Extension Rod)

Accessories & Package

- Hex Wrench
- Dust Collection Assembly
- Bag
- Extension Bar Assembly
- Abrasive Paper
- Carbon Brush
- Carton Packing



ASS125B STRAIGHT GRINDER



Rated Power Input	710W
Max. Wheel Dia.	Φ125mm
Hole Dia. of Wheel	Φ20mm
No-load Speed	5300/min
Net Weight	4.3kg

Features

- External carbon brush, convenient for replacement;
- The semi-enclosed thickened wheel guard, protecting the operator's safety;
- Aluminum spindle housing, sturdy and durable.

Accessories & Package

- Special Wrench
- Sleeve
- Carbon Brush
- Carton Packing

ASS150 STRAIGHT GRINDER



Rated Power Input	1020W
Max. Wheel Dia.	Φ150mm
Hole Dia. of Wheel	Φ20mm
No-load Speed	5000/min
Net Weight	4.7kg

Features

- 1020W powerful motor, efficient and high overload resistance;
- External carbon brush, convenient for replacement;
- The semi-enclosed thickened wheel guard, protecting the operator's safety;
- Aluminum spindle housing, sturdy and durable.

Accessories & Package

- Wrench
- Sleeve
- Carbon Brush
- Carton Packing

AMY02-185SH ELECTRIC CIRCULAR SAW



Rated Power Input	1100W
No-Load Speed	5600/min
Blade Dia.	Φ185mm
Blade Bore.	Φ20mm
Max. Cutting Capacity	66mm
Max. Cutting Angle	45°
Net Weight	3.8kg

Features

- 1100W high-quality motor;
- 3.8kg lightweight body;
- Rear dust exhaust port, smooth chip ejection and integrated vacuum adapter;
- Ergonomic handle, for comfortable operation.

Accessories & Package

- Saw Blade • Hex Wrench • Auxiliary Handle • Fixing Plate • Carbon Brush
- Dust Port Assembly • Carton Packing

AMY03-185 ELECTRIC CIRCULAR SAW



Rated Power Input	1500W
No-Load Speed	5300/min
Blade Dia.	Φ185mm
Blade Bore.	Φ20mm
Max. Cutting Capacity	64mm
Max. Cutting Angle	45°
Net Weight	5.0kg

Features

- 1500W powerful motor, high-efficiency cutting;
- 0-45° angle adjustment, for various machining requirements;
- Ergonomic handle, for comfortable operation;
- Efficient heat dissipation air vents, effectively extending the lifetime of products.

Accessories & Package

- Hex Wrench • Fixing Plate • Carbon Brush • Carton Packing



AMY10-185 ELECTRIC CIRCULAR SAW

NEW

1500W POWERFUL MOTOR
High-efficiency cutting

LARGE DIAMETER SAW BLADE WITH 65mm CUTTING DEPTH
Cuts through thick boards in one pass



EFFICIENT HEAT DISSIPATION AIR VENTS
Effectively extending the lifetime of products

0-45° ANGLE ADJUSTMENT
For various machining requirements

Rated Power Input	1500W
No-load Speed	5000/min
Blade Dia.	Φ185mm
Blade Bore.	Φ20 mm
Max. Cutting Capacity	65mm
Max. Cutting Angle	45°
Net Weight	4.0kg

Accessories & Package

- Hex Wrench • Saw Blade • Fixing Plate • Dust Port Assembly • Carton Packing



*Specifications may differ from country to country.



AMY02-235 ELECTRIC CIRCULAR SAW



Rated Power Input	2000W
No-load Speed	4100/min
Blade Dia.	Φ235mm
Max. Cutting Capacity	90° 85mm
	45° 60mm
Max. Cutting Angle	50°
Net Weight	6.5kg

Features

- 2000W powerful motor, high-efficiency cutting;
- 0-50° angle adjustment, for various machining requirements;
- Efficient heat dissipation air vents, effectively extending the lifetime of products;
- High-quality gears, for long service life.

Accessories & Package

- Special Wrench • Fixing Plate • Carbon Brush • Carton Packing

RECOMMENDED ACCESSORIES

TCT Saw Blade

- **Tungsten-cobalt alloy teeth:** Durable and powerful;
- **High-quality body:** High toughness; stable and reliable.

Diameter	Tooth Thickness (mm)	Aperture (mm)	Number of Teeth	Tooth Shape	Application Scenarios	Product Code
105(4")	1.8	20	30T	ATB	Wood	30270600003
125(5")	1.8	20	40T	ATB	Wood	30270600054
180(7")	1.8	25.4	40T	ATB	Wood	30270600002
180(7")	1.8	25.4	60T	ATB	Wood	30270600004



AJF20 RECIPROCATING SAW

NEW

710W HIGH QUALITY MOTOR
Delivering up to 2800/min no-load speed



STEPLESS SPEED ADJUSTMENT
Applicable to different working conditions

EFFICIENT HEAT DISSIPATION AIR VENTS
Effectively extending the lifetime of products

90° MULTI-DIRECTIONAL GRIP ROTATION
Adapting to various applications

Rated Power Input		710W
No-load Strokes		0-2800/min
Length of Strokes		20mm
Max. Cutting Capacity		
	Wood	Φ110mm (4.33")
	Steel Pipe	Φ60mm (2.36")
Net Weight		2.3kg

Accessories & Package

- Saw Blade (Wood) • Saw Blade(Metal) • Carbon Brush • Carton Packing



AJF30 RECIPROCATING SAW



Rated Power Input	590W
No-load Strokes	0-2300/min
Length of Strokes	30mm
Max. Cutting Capacity	
Steel	90mm
Wood	90mm
Net Weight	3.2kg

Features

- 590W high quality motor;
- Stepless speed adjustment, applicable to different working conditions;
- Efficient heat dissipation air vents, effectively extending the lifetime of products;
- Adjustable base plate, applicable to different working conditions;
- Ergonomics design, reducing operator fatigue.

Accessories & Package

- Saw Blade(3pcs) - Hex Wrench - Carbon Brush - Plastic Case Packing

AJF02-30 RECIPROCATING SAW



Rated Power Input	1300W
No-load Strokes	0-2900/min
Length of Strokes	30mm
Max. Cutting Capacity	
Steel	Φ130mm
Wood	Φ255mm
Net Weight	3.8kg

Features

- 1300W powerful motor, delivering up to 2900/min no-load speed;
- External carbon brush, convenient for replacement;
- Efficient heat dissipation air vents, effectively extending the lifetime of products;
- Tool-less blade change system, for fast, convenient blade insertion and ejection;
- Adjustable base plate, applicable to different working conditions.

Accessories & Package

- Saw Blade (Wood) - Saw Blade(Iron) - Carbon Brush - Plastic Case Packing

AMQ03-65 JIG SAW

NEW

TOOL-LESS BLADE CHANGE SYSTEM
Tool-less blade change system

4 ORBITAL-ACTION SETTINGS
For increased cutting performance



45°
0-45° BEVEL ANGLE ADJUSTMENT
To meet different cutting requirements

550W HIGH QUALITY MOTOR

Rated Power Input	550W
No-load Strokes	800-3200/min
Bevel Cutting Angle	0-45°Left/Right
Max. Cutting Capacity	
Steel	6mm
Wood	75mm
Net Weight	2.3kg



Accessories & Package

- Saw Blade (3pcs) (T144D、T111C、T118A), Anti-fraying Baseplate - Dust Guard
- Carton Packing

AMQ85S JIG SAW



Rated Power Input		580W
No-load Strokes		500-3100/min
Bevel Cutting Angle		0-45°Left/Right
Max. Cutting Capacity	Steel	10mm
	Wood	85mm
Net Weight		2.7kg

Features

- 580W high quality motor;
- 4 orbital-action settings, for increased cutting performance;
- Variable speed switch, for a variety of applications;
- 0-45° bevel angle adjustment, meeting different cutting requirements;
- High strength gear box, robust and durable.

Accessories & Package

- Saw Blade (3pcs) - Hex Wrench (2pcs) - Blade Gauge - Plastic Base - Carton Packing

AZE110S MARBLE CUTTER



Rated Power Input	1400W
No-load Speed	13000/min
Blade Dia.	Φ110mm
Blade Bore	Φ20mm
Max. Cutting Capacity	30mm
Net Weight	2.9kg

Features

- 1400W powerful motor, for high-efficiency cutting;
- 0-30 mm adjustable cutting depth;
- Efficient heat dissipation air vents, effectively extending the lifetime of products;
- Ergonomic handle design, for comfortable operation.

Accessories & Package

- Socket Wrench - Open-end Wrench - Carbon Brush - Carton Packing

 *Specifications may differ from country to country.

INDUSTRIAL-GRADE CUTTING STABLE AND DURABLE

1400W POWERFUL MOTOR
For efficient cutting

EFFICIENT HEAT DISSIPATION AIR VENTS
Effectively extending the lifetime of products

0-30mm ADJUSTABLE CUTTING DEPTH

ERGONOMIC HANDLE DESIGN
For comfortable operation



AZE02-110SH
MARBLE CUTTER

AZE02-110 MARBLE CUTTER



Rated Power Input	1240W
No-load Speed	13000/min
Blade Dia.	Φ110mm
Blade Bore	Φ20mm
Max. Cutting Capacity	30mm
Net Weight	3.1kg

Features

- 1240W high quality motor;
- 0–30 mm adjustable cutting depth;
- Efficient heat dissipation air vents, effectively extending the lifetime of products;
- Ergonomic handle design, for comfortable operation.

Accessories & Package

- Socket Wrench · Open–end Wrench · Carbon Brush · Carton Packing

AZE02-110SH MARBLE CUTTER



Rated Power Input	1400W
No-load Speed	13000/min
Blade Dia.	Φ110mm
Blade Bore	Φ20mm
Max. Cutting Capacity	30mm
Net Weight	2.6kg

Features

- 1400W high quality motor;
- 0–30 mm adjustable cutting depth;
- Efficient heat dissipation air vents, effectively extending the lifetime of products;
- Ergonomic handle design, for comfortable operation.

Accessories & Package

- Socket Wrench · Wrench · Carbon Brush · Carton Packing

AZE03-125 MARBLE CUTTER



Rated Power Iuput	1800W
No-load Speed	13500/min
Blade Dia.	Φ125mm
Blade Bore	Φ22.2mm
Max. Cutting Capacity	38.5mm
Bevel Cutting Angle	0-45°
Net Weight	3.3kg

Features

- 1800W powerful motor, for high–efficiency cutting;
- 0–45° adjustable cutting angle, for various machining requirements;
- Efficient heat dissipation air vents, effectively extending the lifetime of products;
- External carbon brush, convenient for replacement.

Accessories & Package

- Socket Wrench · Open–end Wrench · Carton Packing

AZE03-125S MARBLE CUTTER



Rated Power Iuput	1800W
No-load Speed	13500/min
Blade Dia.	Φ125mm
Blade Bore	Φ22.2mm
Max. Cutting Capacity	38.5mm
Bevel Cutting Angle	0-45°
Net Weight	3.3kg

Features

- 1800W powerful motor, for high–efficiency cutting;
- 0–45° adjustable cutting angle, for various machining requirements;
- Efficient heat dissipation air vents, effectively extending the lifetime of products;
- Cutting depth adjustment, maximum cutting depth: 38.5mm.

Accessories & Package

- Socket Wrench · Open–end Wrench · Carton Packing

AZE180S MARBLE CUTTER



Rated Power Input	1900W
No-load Speed	5500/min
Blade Dia.	Φ180mm
Max. Cutting Capacity	58mm
Net Weight	7.0kg

Features

- 1900W powerful motor, high–efficiency cutting;
- Efficient heat dissipation air vents, effectively extending the lifetime of products;
- Ergonomic handle, for comfortable operation;
- Adjustable cutting depth, for various machining requirements.

Accessories & Package

- Socket Wrench · Auxiliary Handle · Open–end Wrench · Carbon Brush · Carton Packing

AZE425 MARBLE CUTTER



Rated Power Input	2800W
No-load Speed	4100/min
Blade Dia.	Φ425mm
Max. Cutting Capacity	150mm
Net Weight	15.8kg

Features

- 2800W Powerful motor, for high–efficiency cutting;
- Cutting depth adjustment, Maximum cutting depth: 150mm;
- Rubber roller, for efficient and effortless operation;
- Rubber dustproof guard, blocking dust and protecting users.

Accessories & Package

- Saw blade · Hex Wrench · Wrench · Carton Packing

RECOMMENDED ACCESSORIES

Diamond Saw Blade
——Suitable for Marble Cutter

No.	Specification (mm)	Application Scenarios	Product Code
1	115×20×1.8	General Purpose	30270100036
2	112×20×2.0(No.5)	Granite; Marble	30270100006
3	105*20*1.2	Vitrified brick	30270100038



*Specifications may differ from country to country.



AZR110 GROOVE CUTTER



Rated Power Input	1600W
No-load Speed	10800/min
Blade Dia.	Φ110mm
Max. Cutting Depth	32mm
Max. Cutting Width	50mm
Net Weight	4.1kg

Features

- 1600W powerful motor, for efficient groove cutting;
- Double blade groove cutting;
- Dry dust extraction port, external vacuum adapter compatible;
- 50mm Max. cutting width.

Accessories & Package

- Diamond Saw Blade(2pcs) · Socket Wrench · Open–end Wrench · Carbon Brush
- Carton Packing

AZR125S GROOVE CUTTER



Rated Power Input	1800W
No-load Speed	13000/min
Blade Dia.	Φ125mm
Max. Cutting Depth	37.5mm
Max. Cutting Width	50mm
Net Weight	4.1kg

Features

- 1800W powerful motor, for efficient groove cutting;
- Dual–blade cutting system, ensures efficient groove machining;
- Adjustable grooving depth and width, for various machining requirements;
- Labyrinth dustproof structure, effectively extending the lifetime of products.

Accessories & Package

- Diamond Saw Blade(2pcs) · Socket Wrench · Open–end Wrench · Auxiliary Handle
- Carbon Brush · Carton Packing

AZR125BL BRUSHLESS GROOVE CUTTER



Rated Power Input	10A
No-load Speed	7500/min
Blade Dia.	Φ125mm
Max. Cutting Depth	34mm
Max. Cutting Width	42mm
Net Weight	2.9kg

Features

- Dual blades cut double grooves, Max. 135mm synchronous cutting;
- Brushless motor, maintenance–free & longer service life;
- Dual–mode switch: constant–on / momentary start;
- Rotatable head for forward & reverse cutting conversion.

Accessories & Package

- Wrench × 2 · Hex Wrench · Guard Aseembly · Water Pipe Assembly · Carton Packing

AZR410BL BRUSHLESS RING SAW



Rated Power Input	13A
No-load Speed	1150/min
Blade Dia.	Φ410mm
Max. Cutting Capacity	290mm
Net Weight	10.0kg

Features

- Powerful brushless motor;
- 290mm Max. cutting depth;
- Efficient heat dissipation air vents;
- Multi–purpose machine.

Accessories & Package

- Diamond Saw Blade · Wrench · Hex Wrench · Mudguard · Water pipe components
- Carton Packing

AJX09-255 ELECTRIC MITRE SAW



GEAR TRANSMISSION STRUCTURE
Good durability

1800W POWERFUL MOTOR
High-efficiency cutting

RUBBERIZED HANDLE
For comfortable grip



WIDENED DIE CAST BASE
Good cutting stability

Rated Power Input	1800W
No-load Speed	5300/min
Hole Dia. of Blade	Φ25.4mm
Blade Dia.	Φ255mm
Net Weight	10.5kg

Max.Cutting Capacity (HxW)	Miter Angle / Bevel Angle	0°	45° Left and Right
	0°	70x140mm	70x100mm
	45°(Left)	48x135mm	48x98mm

Accessories & Package

• TCT Saw Blade • Vertical Vise Assembly • Holder Assembly(2pcs) • Dust Bag Assembly
• Specical Wrench • Clamping handle • Carton Packing



AJX10-255 SLIDE COMPOUND MITRE SAW



GEAR TRANSMISSION STRUCTURE
Good durability

1800W POWERFUL MOTOR
High-efficiency cutting

RUBBERIZED HANDLE
Comfortable grip

SLIDING RAIL DEVICE
Wider cutting range



WIDENED DIE CAST BASE
Good cutting stability

Rated Power Input	1800W
No-load Speed	5300/min
Hole Dia. of Blade	Φ25.4mm
Blade Dia.	Φ255mm
Net Weight	13.7kg

Max.Cutting Capacity (HxW)	Miter Angle / Bevel Angle	0°	45° Left and Right
	0°	89x320mm	89x210mm
	45°(Left)	42x320mm	42x210mm

Accessories & Package

• TCT Saw Blade • Vertical Vise Assembly • Holder Assembly(2pcs) • Dust Bag Assembly
• Specical Wrench • Clamping handle • Carton Packing



*Specifications may differ from country to country.

STRONG POWER FOR SMOOTH CUTTING

2600W POWERFUL MOTOR
High-efficiency cutting


EFFICIENT HEAT DISSIPATION AIR VENTS
Effectively extending the lifetime of products



TOOL-LESS VISE ADJUSTMENT
For quick workpiece clamping

THICKENED AND REINFORCED BASE
For increased durability

ERGONOMIC D-SHAPED HANDLE
For comfortable operation

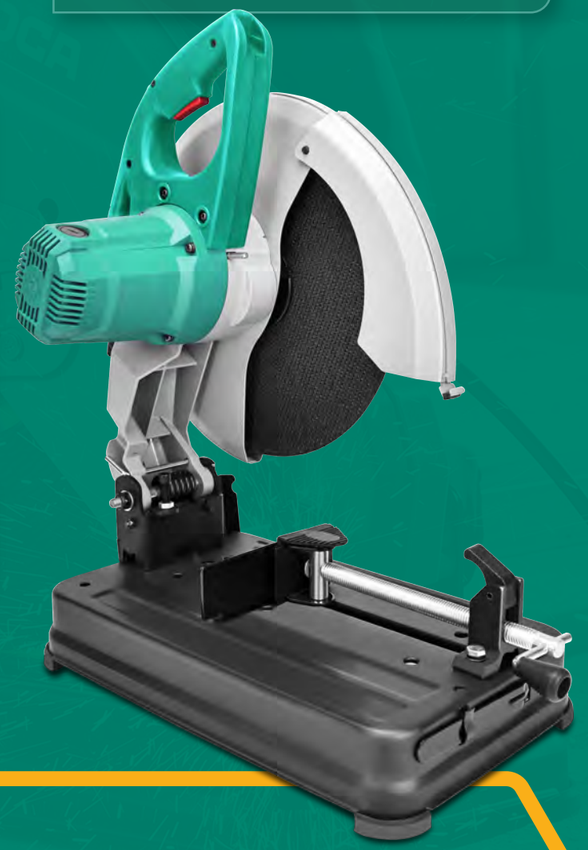

AJG09-355B
ELECTRIC CUT-OFF MACHINE

AJG02-355 ELECTRIC CUT-OFF MACHINE



Rated Power Input		2000W
No-load Speed		3800/min
Wheel Size		Φ355x3xΦ25.4mm
Miter Cutting Angle		0~45°
Max. cutting Capacity	Round Bar	Φ65mm
	Pipe	Φ120mm
	Profiled Bar	120x130mm
Net Weight		16.0kg

Features

- 2000W high-quality motor;
- Efficient heat dissipation air vents, effectively extending the lifetime of products;
- Tool-less vise adjustment, for quick workpiece clamping;
- Thickened and reinforced base, for increased durability.

Accessories & Package

- Wrench - Carbon Brush - Carton Packing

AJG04-355S ELECTRIC CUT-OFF MACHINE



Rated Power Input		2200W
No-load Speed		3800/min
Wheel Size		Φ355x3xΦ25.4mm
Miter Cutting Angle		0-45°
Max.Cutting Capacity	Pipe	Φ115mm
	Profiled Bar	115x130mm
Net Weight		15.6kg

Features

- 2200W powerful motor, for high-efficiency cutting;
- Efficient heat dissipation air ventsm, effectively extending the lifetime of products;
- Ergonomic D-shaped handle, for comfortable operation;
- Thickened and reinforced base, for increased durability.

Accessories & Package

- Wrench - Carbon Brush - Carton Packing

AJG09-355B ELECTRIC CUT-OFF MACHINE



Rated Power Input		2600W
No-load Speed		3900/min
Wheel Size		Φ355×3×Φ25.4mm
Miter Cutting Angle		0~45°
Max. cutting Capacity	Pipe	Φ115mm
	Profiled Bar	115x130mm
Net Weight		14.5kg

Features

- 2600W powerful motor, high-efficiency cutting;
- Efficient heat dissipation air vents, effectively extending the lifetime of products;
- Thickened and reinforced base, for increased durability;
- Ergonomic D-shaped handle, for comfortable operation.

Accessories & Package

- Wrench - Carton Packing



AJG09-355BS ELECTRIC CUT-OFF MACHINE



Rated Power Input		2600W
No-load Speed		3900/min
Wheel Size		Φ355×3×Φ25.4mm
Miter Cutting Angle		0~45°
Max. cutting Capacity	Pipe	Φ115mm
	Profiled Bar	115x130mm
Net Weight		14.5kg

Features

- 2600W powerful motor, high-efficiency cutting;
- Efficient heat dissipation air vents, effectively extending the lifetime of products;
- Thickened and reinforced base, for increased durability.

Accessories & Package

- Wrench - Carton Packing

AJG10-355 ELECTRIC CUT-OFF MACHINE



Rated Power Input		2200W
No-load Speed		4100/min
Wheel Size		Φ355×3×Φ25.4mm
Miter Cutting Angle		0~45°
Max. cutting Capacity	Pipe	Φ100mm
	Profiled Bar	100x100mm
Net Weight		12.0kg

Features

- 2200W powerful motor, for high-efficiency cutting;
- Efficient heat dissipation air vents, effectively extending the lifetime of products;
- Ergonomic D-shaped handle, for comfortable operation;
- Tool-less vise adjustment, for quick workpiece clamping.

Accessories & Package

- Wrench - Carton Packing

RECOMMENDED ACCESSORIES

Cut Off Wheel

- **High-quality resin:** Strong and durable;
- **Thickening steel ring:** More powerful and safer.

No.	Specification (mm)	Material	Colour	Net	Packing(pcs)	Product Code
1	355×2.5×25.4	A30T-BF	Green	Single	30	30272100012



*Specifications may differ from country to country.

ATS255 TABLE SAW



Rated Power Input		2000W
No-load Speed		5300/min
Blade Dia.		Φ255mm
Miter Cutting Angle		0-45°
Max. Cutting Capacity	90°	85mm
	45°	55mm
Net Weight		21.2kg

Features

- 2000W pure copper motor, durable power & high efficiency;
- Max. 88mm single cutting depth;
- Heightening stand, enables easy standing operation;
- Extendable table, for large workpiece cutting.

Accessories & Package

- Activity Shield - Auxiliary Pusher - Extended Support Ruler - Four Crossbeam Supports
- Clamping Plate for the Guardrail - Four Supports - Bevel Gauge - Open-end Wrenches x 2
- Foot Pads x 4 - Foot Supports x 2 - Hexagonal Flange Surface Screws M6*12 x 8
- Flange Nuts M6 x 28 - Semi-round Head Square Neck Screws M6*10 x 20 - Butterfly Nuts x 2
- Washers x 2 - Semi-round Head Square Neck Screws M6*14 x 2

AMB82 ELECTRIC PLANER



Rated Power Input	500W
Max. Planing Width	82mm
Max. Planing Depth	1mm
No-load Speed	16000/min
Net Weight	2.6kg

Features

- 500W high quality motor;
- 1mm Max. planing depth;
- Double-rolling blades, easy planing wood;
- Belt drive, good toughness, wear resistance and easy replacement.

Accessories & Package

- Blade - Sharpening Holder Assembly - Blade Gauge - Socket Wrench
- Guide Plate Assembly - Carbon Brush - Carton Packing

AMB110 ELECTRIC PLANER



Rated Power Input	840W
Max. Planing Width	110mm
Max. Planing Depth	2mm
No-load Speed	16500/min
Net Weight	4.2kg

Features

- 2mm Max. planing depth; - 840W powerful motor, high-efficiency planing;
- Double-rolling blades, planing wood effortless;
- Belt drive, high toughness and wear resistance, easy to replace.

Accessories & Package

- Blade - Sharpening Holder Assembly - Blade Gauge - Socket Wrench
- Guide Plate Assembly - Carbon Brush - Carton Packing

AMP02-6 TRIMMER



Rated Power Input	350W
No-load Speed	30000/min
Collet Size	Φ6mm/6.35mm
Net Weight	1.8kg

Features

- Plastic body, heat-insulating and non-scalding;
- Transparent housing, convenient to observe the trimming situation.

Accessories & Package

- Collet Chuck - Open-end Wrench(2pcs) - Straight Guide Assembly
- Templet Guide Assembly - Trimmer Guide Assembly - Carbon Brush - Carton Packing

AMD320 MULTI-TOOL



Rated Power Input	320W
Oscillations Frequency	11000-20000/min
Speed Shifting	6(1-2-3-4-5-6)
Oscillation Angle	3°
Net Weight	1.3kg

Features

- High frequency swing, easy cutting, 3° oscillation movement allows quick completion of professional applications into materials such as metal, wood and plastic;
- General-purpose interface, matched different accessories, widely applications;
- 6-speed adjustment, meeting different working conditions; - 1.3kg lightweight body;
- Efficient heat dissipation air vents, effectively extending the lifetime of products;

Accessories & Package

- Adaptor for Tool Holder - HCS Cut Saw Blade - Cut Saw Blade(2pcs) - Segment Saw Blade
- Scraper - Sanding Plate - Abrasive Paper (12pcs) - File Holder Assembly
- Accessory Locking Parts - Hex Wrench - Carbon Brush - Carton Packing

AMB04-82 ELECTRIC PLANER



Rated Power Input	500W
Max. Planing Width	82mm
Max. Planing Depth	1mm
No-load Speed	16000/min
Net Weight	2.4kg

Features

- 500W powerful motor, high-efficiency planing;
- 1mm Max. Planing depth;
- Double-rolling blades, planing wood effortless;
- Belt drive, high toughness and wear resistance, easy to replace.

Accessories & Package

- Blade - Sharpening Holder Assembly - Blade Gauge - Socket Wrench
- Guide Plate Assembly - Carbon Brush - Carton Packing



AMP06-6 TRIMMER



Rated Power Input	620W
No-load Speed	34000/min
Collet Size	Φ6mm/6.35mm
Net Weight	1.6kg

Features

- 620W powerful motor; - New heat dissipation design delivers excellent temperature control across the entire machine, ensuring a comfortable hold.
- Dual-shell construction offers high rigidity and high precision, with smooth and comfortable operation.

Accessories & Package

- Open Wrench - Special wrench - Straight Guide - Templet Guide
- Trimmer Guide Assembly - Carbon Bursh - Carton Packing

AMP04-6S TRIMMER





STRONG ALUMINUM BODY
Sturdy and durable



TRANSPARENT HOUSING
Convenient to observe the trimming situation

EXTERNAL CARBON BRUSH
Convenient replacement



FITTED WITH DIFFERENT 6.35 MM (1/4") MILLING CUTTERS
Meeting multiple applications

Rated Power Input	550W
No-load Speed	30000/min
Max. Milling Cutter Dia.	Φ6.35mm
Net Weight	1.6kg

Accessories & Package

• Wrench (2pcs) • Straight Guide • Templet Guide • Trimmer Guide Assembly
• Carbon Brush • Carton Packing



AMR8S WOOD ROUTER



Rated Power Input	900W
Max. Milling Cutter Dia.	Φ8mm
No-load Speed	26000/min
Net Weight	2.9kg

Features

• 900W high quality motor;
• Thickened base, sturdy and durable;
• 1mm depth pre-conditioning precise control, meeting your needs for fine carving;
• Labyrinth dustproof structure, effectively extending the lifetime of products.

Accessories & Package

• Hinge Boring Bit • Collet Chuck(2pcs) • Open-end Wrench • Special Wrench
• Straight Guide Assembly • Carbon Brush • Carton Packing

AMR02-12B WOOD ROUTER



Rated Power Input	1850W
Max. Milling Cutter Dia.	Φ12.7mm
No-load Speed	22000/min
Net Weight	6.0kg

Features

• 1850W powerful motor;
• Thickened base,Sturdy and durable;
• 1mm depth precise control,Meeting your needs for fine carving;
• Labyrinth dustproof structure,Effectively extending the lifetime of products.

Accessories & Package

• Wrench (2pcs) • Straight Guide • Retainer Base Assembly • Templet Guide
• Trimmer Guide Assembly • Collet (6.35mm) • Collet (9.52mm) • Carbon Brush • Carton Packing

AMR03-12 WOOD ROUTER



Rated Power Input	1050W
Max. Milling Cutter Dia.	Φ12.7mm
No-load Speed	23000/min
Net Weight	3.5kg

Features

• 1050W high quality motor;
• Thickened base, sturdy and durable;
• Efficient heat dissipation air vents, effectively extending the lifetime of products;
• Ergonomic handle, comfortable to hold.

Accessories & Package

• Wrench (2pcs) • Straight Guide • Templet Guide • Trimmer Guide Assembly
• Collet (6.35mm) • Collet (9.52mm) • Carton Packing



AQW5/5.5 HIGH-PRESSURE WASHER



Rated Power Input	1000W
Max. Inlet Water Pressure	7bar
Rated Flow	5L/min
Rated Pressure	55bar
Allowable Pressure	90bar
Rated Inlet Water Temperature	0-40°C
Net Weight	2.8kg

Features

• 2.8kg lightweight and compact body, convenient to operation and storage;
• 90bar Max. pressure output, for efficient cleaning;
• IPX5 waterproof construction, for safe operation;
• Dual choice of tap water and self-priming, flexible water access methods.

Accessories & Package

• High-Pressure Tube (8m) • Inlet Pipe (2m) • High Pressure Water Gun • Bracket
• Inlet pipe connector (2pcs) • High pressure pipe connector • Water Tap Connector
• Water Filter Assembly • O Ring(4pcs) • Soap Bottle • Carton Packing



AQW5/6B HIGH-PRESSURE WASHER



Rated Power Input	1080W
Max. Inlet Water Pressure	7bar
Rated Flow	5L/min
Rated Pressure	60bar
Allowable Pressure	90bar
Rated Inlet Water Temperature	0-40°C
Net Weight	2.9kg

Features

• 2.9kg lightweight and compact body design, convenient to operation and storage;
• 90bar Max. pressure output, for efficient cleaning;
• IPX5 waterproof construction, for safe operation;
• Dual choice of tap water and self-priming, flexible water access methods.

Accessories & Package

• High-Pressure Tube (8m) • Inlet Pipe (2m) • High Pressure Water Gun • Bracket × 2
• Inlet pipe connector (2pcs) • High pressure Pipe Connector • Water Tap Connector
• Water Filter Assembly • O Ring (4pcs) • Soap Bottle • Carton Packing



AQW5.5/7S HIGH-PRESSURE WASHER



Rated Power Input	1200W
Rated Operating Pressure	70bar
Water Temperature Input	0-40°C
Rated Flow	5.5L/min
Net Weight	7.6kg

Features

• 1200W induction motor, low noise and efficient cleaning;
• 70bar rated pressure, 5.5L/min flow output;
• Compact body design, easy to carry and suitable for home use;
• IPX5 waterproof construction, for safe operation.

Accessories & Package

• High-Pressure Tube (10m) • Inlet Pipe(3m) • High Pressure Water Gun
• Inlet Pipe Connector (2pcs) • High pressure Pipe Connector • Water Tap Connector
• Water Filter Assembly • O Ring(4pcs) • Nozzle Cleaner • Soap Bottle • Carton Packing

AQW1600CX HIGH-PRESSURE WASHER



Rated Power Input	1600W
Rated Operating Pressure	100bar
Water Temperature Input	0-40°C
Rated Flow	5L/min
Net Weight	6.9kg

Features

• Integrated scroll system, quick retractable water outlet pipe;
• Max. 130bar pressure, 5L/min flow output, for powerful cleaning;
• Auto-stop function, saving energy and extending the lifetime of pumps;
• Dual choice of tap water and self-priming, flexible water access methods.

Accessories & Package

• Inlet Pipe (5m) • High Pressure Water Gun • Rotatable Fan Zozzle • Soap Bottle
• Tap Connector • Carton Packing

AQW1800GX HIGH-PRESSURE WASHER



Rated Power Input	1800W
Rated Operating Pressure	90bar
Water Temperature Input	0-40°C
Rated Flow	6L/min
Net Weight	21.0kg

Features

• High-power induction motor, long life, high pressure & large flow;
• ADC12 alloy pump head, corrosion-resistant and high efficiency;
• Horizontal / vertical / wall-mounted / trolley mount for diverse uses
• Auto stop function, save power & water, prolong service life.

Accessories & Package

• Inlet Pipe (5m) • High-Pressure Tube (10m) • High Pressure Water Gun • 0° Nozzle
• 20° Nozzle • Tap Connector • Inlet pipe connector • Nut assembly • Carton Packing

AQW2000GX HIGH-PRESSURE WASHER



Rated Power Input	800W
Rated Operating Pressure	50bar
Allowable Pressure	90bar
Max Flow	8L/min
Net Weight	9.0kg

Features

• 800W induction motor, for powerful and efficient cleaning;
• 50bar rated pressure, 8L/min flow output;
• Compact body design, easy to carry and suitable for household;
• High quality piston pump, precision construction, fast pressurization.

Accessories & Package

• High-Pressure Tube (7m) • Inlet Pipe (2m) • High Pressure Water Gun
• Inlet pipe connector (2pcs) • Carton Packing

AVC15 VACUUM CLEANER



Rated Power Input	1200W
Capacity	15L
Max. Vacuum Pressure	17.5kPa
Max. Air Volume	28L/s
Cooling System	Recycle
Net Weight	7.6kg

Features

- 1200W powerful motor, delivering Max.17.5kPa vacuum pressure, for efficient vacuum;
- Dry and wet dual–purpose, meeting different vacuum scenarios;
- IPX4 waterproof, for safe operation.

Accessories & Package

- Dust Cleaning Brush • Water Cleaning Brush • Crevice Nozzle • Flat Suction Nozzle
- Round Brush • Telescopic Steel Pipe • Hose Assembly • Carton Packing

AVC30 VACUUM CLEANER



Rated Power Input	1200W
Capacity	30L
Max. Vacuum Pressure	18.5kPa
Max. Air Volume	30L/s
Cooling System	Recycle
Net Weight	8.8kg

Features

- 1200W powerful motor, delivering Max.18.5kPa vacuum pressure, for efficient vacuum;
- Dry and wet dual–purpose, meeting different vacuum scenarios;
- IPX4 waterproof, for safe operation.

Accessories & Package

- Dust Cleaning Brush • Water Cleaning Brush • Crevice Nozzle • Flat Suction Nozzle
- Round Brush • Telescopic Steel Pipe • Hose Assembly • Curved Steel Pipe (2pcs) • Carton Packing

AVC04-30 VACUUM CLEANER



Rated Power Input	1300W
Capacity	30L
Max. Vacuum Pressure	18kPa
Max. Air Volume	30L/s
Net Weight	6.9kg

Features

- 1300W pure copper motor, powerful & strong suction;
- Adjustable metal telescopic tube, fits different heights perfectly;
- 3–in–1 wet, dry and blowing functions for multi–scene use;
- H13 HEPA filter, fine dust filtration & motor protection.

Accessories & Package

- Telescopic Steel Pipe • Hose Assembly • Floor Brush • Round Brush • Long Flat Sucker
- Sponge • Carton Packing

AVC60 VACUUM CLEANER



Rated Power Input	2300W(dual motors)
Capacity	60L
Max. Vacuum Pressure	17.5kPa
Max. Air Volume	42L/s
Cooling System	Recycle
Net Weight	24.0kg

Features

- Dual–motor design, delivering Max.17.5kPa vacuum pressure, for efficient vacuum;
- Dry and wet dual–purpose, meeting different vacuum scenarios;
- IPX4 waterproof, for safe operation.

Accessories & Package

- Dust Cleaning Brush • Water Cleaning Brush • Crevice Nozzle • Flat Suction Nozzle
- Round Brush • Telescopic Steel Pipe • Hose Assembly • Curved Steel Pipe (2pcs) • Carton Packing

AVC80 VACUUM CLEANER



Rated Power Input	3200W(Three motors)
Capacity	80L
Max. Vacuum Pressure	18.5kPa
Max. Air Volume	48L/s
Cooling System	Recycle
Net Weight	26.5kg

Features

- Three–motors design, delivering Max.18.5kPa vacuum pressure, for efficient vacuum;
- Dry and wet dual–purpose, meeting different vacuum scenarios;
- IPX4 waterproof, for safe operation.

Accessories & Package

- Dust Cleaning Brush • Water Cleaning Brush • Crevice Nozzle • Flat Suction Nozzle
- Round Brush • Telescopic Steel Pipe • Hose Assembly • Curved Steel Pipe (2pcs) • Carton Packing

AVC03-60 VACUUM CLEANER



Rated Power Input	2400W(Dual motors)
Capacity	60L
Max. Vacuum Pressure	20kPa
Max. Air Volume	55L/s
Cooling System	Recycle
Net Weight	15.8kg

Features

- Dual–motor design, delivering Max. 20kPa vacuum pressure, for efficient vacuum;
- Dual filtration system, 99% dust filtration rate, detachable design for convenient cleaning;
- Dry and wet dual–purpose, meeting different vacuum scenarios;
- Thickened metal barrel body, sturdy and durable.

Accessories & Package

- Round Brush • Flat Suction Nozzle • Dust Separator • Hepa Assembly • Hose Assembly
- Floor Brush • Push Rod • Metal Pipe Conector • Roller Assembly • Carton Packing

AVC03-80 VACUUM CLEANER



Rated Power Input	3600W(Three motors)
Capacity	80L
Max. Vacuum Pressure	21kPa
Max. Air Volume	60L/s
Cooling System	Recycle
Net Weight	19.5kg

Features

- Three–motor design, delivering Max. 20kPa vacuum pressure, for efficient vacuum;
- Dual filtration system, 99% dust filtration rate, detachable design for convenient cleaning;
- Dry and wet dual–purpose, meeting different vacuum scenarios;
- Thickened stainless steel barrel body, sturdy and durable.

Accessories & Package

- Round Brush • Crevice Nozzle • Dust Separator • Hepa Assembly • Hose Assembly • Dust Cleaning Brush
- Water Cleaning Brush • Push Rod • Metal Pipe Conector • Roller Assembly • Carton Packing

AQF32 BLOWER VACUUM



Rated Power Input	680W
No-load Speed	8300-16300/min
Air Volume	56-113CFM(1.6-3.2m³/min)
Net Weight	1.8kg

Features

- 680W powerful motor;
- 113CFM (3.2m³/min) Max. air volume;
- 1.8kg lightweight body design, for convenient operation;
- 6–speed adjustable control, meeting different working conditions.

Accessories & Package

- Blowpipe Assembly • Dust Bag Assembly • Carton Brush • Carton Packing

AQF120 BLOWER VACUUM



Rated Power Input	1200W
No-load Speed	8000-17000/min
Air Volume	254-423CFM(7.2-12m³/min)
Air Speed	32-55m/s
Net Weight	2.9kg

Features

- 1200W powerful motor; • 55m/s Max. air speed;
- 5–speed adjustable control, meeting different working conditions;
- Equipped with shoulder strap, for effortless operation.

Accessories & Package

- Air Duct Ring • Hanging Buckle • Suspension Strap • Carton Packing

AML07-405S ELECTRIC CHAIN SAW



Rated Power Input	1700W
No-load speed	540m/min
Max. Length of guide bar	405mm(16")
Net Weight	4.0kg

Features

- 1700W powerful motor; • 540m/min chain speed, for efficient and smooth cutting;
- Automatic oil pumping system, effectively extending the lifetime of the chain;
- Tool–free saw chain tensioning, for convenient operation and maintenance.

Accessories & Package

- Guide Bar • Saw Chain • Olier • Socket Wrench • Carton Packing

AYL320 ELECTRIC LAWN MOWER



Rated Power Input	1200W
Cutting Width	320mm
No-load Speed	3100/min
Bagging Capacity	30L
Cutting Height	25/45/60mm
Net Weight	9.5kg

Features

- 1200W high quality motor; • 3–cutting height adjustment;
- 320mm Max. cutting range; • 30L grass collecting bag;
- Lightweight design, for effortless storage and transportation.

Accessories & Package

- Grass Bag • Carton Packing

AYL370 ELECTRIC LAWN MOWER



Rated Power Input	1500W
Cutting Width	370mm
No-load Speed	3300/min
Bagging Capacity	35L
Cutting Height	25-75mm
Net Weight	12.6kg

Features

- 1500W high quality motor; • 5–cutting height adjustment;
- 370mm Max. cutting range; • 35L grass collecting bag;
- Lightweight design, for effortless storage and transportation.

Accessories & Package

- Grass Bag • Carton Packing

AQU160/AQU160B ELECTRIC MIXER



Rated Power Input	800W
No-load Speed	680/min
Stirring Paddle Dia.	160mm
Stirring Padde Thread Dia.	M12
Net Weight	2.4kg

Features

- 800W powerful motor; • External carbon brush, convenient for replacement;
- Auxiliary handle, providing great control for mixing applications;
- Standard M12 Stirring paddle Thread Dia.

Accessories & Package

- Stirring Paddle Assembly • Auxiliary Handle • Carbon Brush • Carton Packing

AQU02-160/AQU02-160B ELECTRIC MIXER



Rated Power Input	1010W
No-load Speed	620/min
Stirring Paddle Dia.	160mm
Stirring Padde Thread Dia.	M12
Net Weight	2.7kg

Features

- 1010W powerful motor; • External carbon brush, convenient for replacement;
- D–shaped handle, comfortable to hold;
- Auxiliary handle, providing great control for mixing applications.

Accessories & Package

- Stirring Paddle Assembly • Auxiliary Handle • Carbon Brush • Carton Packing

AQU06-160 ELECTRIC MIXER



Rated Power Input	2000W
No-load Speed	500/min
Stirring Paddle Dia.	220mm
Stirring Padde Thread Dia.	M14
Net Weight	5.1kg

Features

- 2000W powerful motor;
- External carbon brush, convenient for replacement;
- Auxiliary handle, providing great control for mixing applications;
- High strength gear box, sturdy and durable.

Accessories & Package

- Auxiliary Handle • Carbon Brush • Carton Packing

AQU12-160 ELECTRIC MIXER



Rated Power Input	1400W
No-load Speed	1050/min
Stirring Padde Thread Dia.	M14/M22
Net Weight	2.8kg

Features

- 1400W powerful motor;
- D–shaped handle; comfortable to hold;
- Auxiliary handle providing great control for mixing applications;
- Output shaft with internal and external threads, fits M22 and M14 mixing paddles.

Accessories & Package

- Stirring Paddle Assembly (160mm) • Auxiliary Handle • Carbon Brush • Carton Packing



AQB2000 HEAT GUN



Rated Power Input	2000W
Temperature	
Low Temperature	50-480°C
High Temperature	50-600°C
Air Flow	
Low Temperature	210-250L/min
High Temperature	340-380L/min
Net Weight	0.6kg

Features

- 2000w high power, fast heating and high efficiency;
- Double heating wires, for fast heating;
- Stainless steel nozzle, durable and well–distributed air–out;
- Variable Temp Control, a wide range of applications

Accessories & Package

- Flat wind tube • round wind tube • Carton Packing

AQB06-2000 HEAT GUN



Rated Power Input	2000W
Temperature	
Low Temperature	400°C
High Temperature	600°C
Air Flow	
Low Temperature	150L/min
High Temperature	240L/min
Net Weight	0.53kg

Features

- 2000W maximum output power;
- Good heating core design, longer working life;
- Stainless steel nozzle, durable and well–distributed air–out;
- 2–gear adjustable temperature and air flow.

Accessories & Package

- Flat Wind Tube • Round Wind Tube • Carton Packing

AQB07-2000 HEAT GUN



Rated Power Input	2000W
High Temperature	650°C
Max Air Flow	240L/min
Net Weight	0.6kg

Features

- 2000W high power,fast heating and high efficiency;
- Digital display control panel, precise and convenient operation;
- Wise temperature and wind speed memory, one–click restores the working state.

Accessories & Package

- Flat Wind Tube • Round Wind Tube • Carton Packing

AZD35 CONCRETE VIBRATOR



Rated current Input	1200W
No-load Speed	4700/min
Output shaft specification	8mm
Net Weight	2.0kg

Features

- 1200W powerful motor; • Cast aluminum head, sturdy and durable;
- Efficient heat dissipation air vents, effectively extending the lifetime of products;
- 2.0kg lightweight and compact body.

Accessories & Package

- Carton Packing

APWG1500 HIGH-PRESSURE SPRAYING UNIT



Rated Power Input	1500W
No-load Speed	4600/min
Max. Working Pressure	20Mpa
Max. Flow	2.0L/min
Net Weight	15.2kg

Features

- Copper wire brushless motor, powerful for long–time continuous work;
- Precision helical gears, sturdy, durable & low noise;
- Newly optimized controller circuit for better stability & longer lifespan;
- Wearproof ceramic plunger pump, 5 × longer service life than standard versions.

Accessories & Package

- Spray Gun • High–Pressure Tube (13m) • Extension Rod • Dust Suction Pipe
- Dust Suction Pipe Filter • Material Cup • Spare O–ring × 2 • Carton Packing

APWG2000 HIGH-PRESSURE SPRAYING UNIT



Rated Power Input	2000W
No-load Speed	5300/min
Max. Working Pressure	19Mpa
Max. Flow	3.0L/min
Net Weight	16.4kg

Features

- Pure copper brushless motor, high power & long continuous working life;
- Precision helical gears, durable, stable and low noise;
- Optimized control circuit for higher stability & longer service life;
- Ceramic plunger pump, 5 × service life than traditional pumps.

Accessories & Package

- Spray Gun • High–Pressure Tube (13m) • Extension Rod • Dust Suction Pipe
- Dust Suction Pipe Filter • Material Cup • Spare O–ring × 2 • Carton Packing

AF50 AIR BRAD NAILER



Operate pressure	5-8bar
Inner Dia. of Air Pipe	8mm
Capacity of Magazine	100PCS
Nails Type	Brad Nail
Nails Size	1.25×1.05×50(max)mm
Net Weight	1.5kg

Features

- All–aluminum body, lightweight and durable;
- Tool–free nose piece, for fast jam clearing and maintenance;
- Aluminum alloy nail magazine, 100pcs large capacity;
- Rubberized handle, comfortable to hold.

Accessories & Package

- Hex Wrench(3pcs) • Oiler • Carton Packing

A03-F30 AIR BRAD NAILER



Working Pressure	4-8bar
Inner Dia. of Air Pipe	5mm
Capacity of Magazine	100PCS
Nail Type	Brad Nail
Nail Size	1.25×1.05×30(max)mm
Net Weight	1.03kg

Features

- All–aluminum body, lightweight and durable;
- Tool–free nose piece, for fast jam clearing and maintenance;
- Aluminum alloy nail magazine, 100pcs large capacity;
- Rubberized handle, comfortable to hold.

Accessories & Package

- Hex Wrench(2pcs) • Oiler • Carton Packing

A03-T50DC AIR BRAD NAILER



Working Pressure	5-8bar
Inner Dia. of Air Pipe	5mm
Capacity of Magazine	100PCS
Nail Type	Brad Nail
Nail Size	1.6×1.4×50 (max)mm
Net Weight	1.9kg

Features

- All–aluminum body, sturdy and durable;
- Switch with safety lock, for safe operation;
- Aluminum alloy nail magazine, 100pcs large capacity;
- Rubberized handle, comfortable to hold.

Accessories & Package

- Hex Wrench(2pcs) • Oiler • Carton Packing

A03-T50G AIR BRAD NAILER



Working Pressure	5-8bar
Inner Dia. of Air Pipe	5mm
Capacity of Magazine	100PCS
Nail Type	Brad Nail
Nail Size	1.6×1.4x50(max)mm
Net Weight	1.85kg

Features

- All–aluminum body, sturdy and durable;
- Tool–free nose piece, for fast jam clearing and maintenance;
- Switch with safety lock, for safe operation;
- Aluminum alloy nail magazine,100pcs large capacity.

Accessories & Package

- Hex Wrench(2pcs) • Oiler • Carton Packing

A8016J AIR STAPLER



Working Pressure	4-7bar
Inner Dia. of Air Pipe	5mm
Capacity of Magazine	125PCS
Nail Type	Staple
Nail Size	0.66×1.27×16mm
Net Weight	0.89kg

Features

- 360° rotatable air exhaust;
- Lightweight die–cast aluminum body;
- Anti–jam structure with quick clog clearing;
- Bottom nail loading design.

Accessories & Package

- Gasket • Hex Wrench (2pcs) • Oil Bottle • Carton Packing

A03-1013J AIR STAPLER



Working Pressure	4-8bar
Inner Dia. of Air Pipe	5mm
Capacity of Magazine	100PCS
Nail Type	Staple
Nail Size	0.6×10×13 (max)mm
Net Weight	0.82kg

Features

- All–aluminum body, lightweight and durable;
- Tool–free nose piece, for fast jam clearing and maintenance;
- Aluminum alloy nail magazine, 100pcs large capacity;
- Trigger switch, for simple and convenient operation.

Accessories & Package

- Hex Wrench (2pcs) • Oiler • Carton Packing

A03-1022J AIR STAPLER



Working Pressure	4-8bar
Inner Dia. of Air Pipe	5mm
Capacity of Magazine	100PCS
Nail Type	Staple
Nail Size	0.6×10×22(max)mm
Net Weight	1.11kg

Features

- All–aluminum body, lightweight and durable;
- Tool–free nose piece, for fast jam clearing and maintenance;
- Aluminum alloy nail magazine, 100pcs large capacity;
- Trigger switch, for simple and convenient operation.

Accessories & Package

- Hex Wrench(2pcs) - Oiler - Carton Packing

A03-422J AIR STAPLER



Working Pressure	4-8bar
Inner Dia. of Air Pipe	5mm
Capacity of Magazine	100PCS
Nail Type	Staple
Nail Size	0.6×4×22mm
Net Weight	1.02kg

Features

- All–aluminum body, lightweight and durable;
- Tool–free nose piece, for fast jam clearing and maintenance;
- Aluminum alloy nail magazine,100pcs large capacity;
- Trigger switch, for simple and convenient operation.

Accessories & Package

- Hex Wrench(2pcs) - Oiler - Carton Packing

A03-P625 AIR PIN NAILER



Working Pressure	4-8bar
Inner Dia. of Air Pipe	5mm
Capacity of Magazine	100PCS
Nail Type	Pin Nail
Nail Size	Φ0.63x25(max)mm
Net Weight	0.83kg

Features

- All–aluminum body, 0.83kg lightweight body and durable;
- Aluminum alloy nail magazine, 100pcs large capacity;
- Trigger switch, for simple and convenient operation.

Accessories & Package

- Hex Wrench(2pcs) - Oiler - Carton Packing

A03-ST64C AIR CONCRETE NAILER



Working Pressure	5-8bar
Inner Dia. of Air Pipe	5mm
Capacity of Magazine	70pcs
Nail Type	Steel Nail
Nail Size	Φ2.2(18-64)mm
Net Weight	2.85kg

Features

- All–aluminum body, sturdy and durable;
- Aluminum alloy nail magazine, holds up to 70 nails;
- Nose with safety device, for safe operation;
- Rubberized handle, comfortable to hold.

Accessories & Package

- Hex Wrench(3pcs) - Oiler - Carton Packing

A03-ST64G AIR CONCRETE NAILER



Working Pressure	5-8bar
Inner Dia. of Air Pipe	5mm
Capacity of Magazine	70pcs
Nail Type	Steel Nail
Nail Size	Φ2.2(18-64)mm
Net Weight	2.95kg

Features

- All–aluminum body, sturdy and durable;
- Tool–free nose piece, for fast jam clearing and maintenance;
- Nose with safety device, for safe operation;
- Aluminum alloy nail magazine, holds up to 70 nails.

Accessories & Package

- Hex Wrench(3pcs) - Oiler - Carton Packing

A03-ST38 AIR CONCRETE NAILER



Working Pressure	5-8bar
Inner Dia. of Air Pipe	5mm
Capacity of Magazine	65pcs
Nail Type	Steel Nail
Nail Size	Φ2.2(18-38)mm
Net Weight	1.98kg

Features

- All–aluminum body, sturdy and durable;
- Switch with safety lock, for safe operation;
- Aluminum alloy nail magazine, holds up to 65 nails;
- Rubberized handle, comfortable to hold.

Accessories & Package

- Hex Wrench(2pcs) - Oiler - Carton Packing

ACN55 AIR COIL NAILER



Operate Pressure	5-8bar
Inner Dia. Of Air Pipe	8mm
Capacity of Magazine	300Pcs
Nails Type	Smooth Nail/ Screw Nail/ Plain Nail
Nails Size	25-57(Φ2.1-Φ2.3)mm
Net Weight	2.8kg

Features

- Integrated aluminum body, durable and long–lasting;
- Nose with safety device, for safe operation;
- Quick–load nail system, for efficient workflow;
- Large capacity nail magazine, holds up to 300 nails.

Accessories & Package

- Hex Wrench - Goggles - Oiler - Carton Packing

ACN70 AIR COIL NAILER



Operate Pressure	6-8bar
Inner Dia. Of Air Pipe	8mm
Capacity of Magazine	300Pcs
Nails Type	Smooth Nail/ Screw Nail/ Plain Nail
Nails Size	45-70(Φ2.3-Φ2.9)mm
Net Weight	3.6kg

Features


- Integrated aluminum body, durable and long–lasting;
- Safe nail–driving design, easy maintenance and anti–nail jamming;
- Quick–load nail system, for efficient workflow;
- Large–capacity magazine, holds up to 300 nails.

Accessories & Package

- Hex Wrench(2pcs) - Goggles - Oiler - Carton Packing

*Specifications may differ from country to country.

OVERVIEW OF AIR COMPRESSOR



MODEL	PRODUCT PICTURE	POWER (W)	CAPACITY (L)	DISPLACEMENT (L/MIN)	FILLING TIME (S)	NUMBER OF NAIL GUNS THAT CAN BE CONNECTED SIMULTANEOUSLY (30mm SIZE NAIL GUN)	NOISE (DB)	PORTABLE	FAST FILLING	LOW NOISE
AQE550/10L		550	10	32	72	1	53	●		●
AQE550/30L		550	30	32	190	2	53			●
AQE1080/10L		1080	10	68	30	3	65	●	●	
AQE1080/30L		1080	30	68	90	4	65		●	
AQE1260/10		1260	10	75	32	2	65	●	●	●
AQE1260/30		1260	30	75	95	2	65		●	●
AQE1260×2/50		1260×2	50	150	92	4	68		●	●
AQE1300/10L		1300	10	78	29	3	69	●	●	
AQE1300/30L		1300	30	78	80	4	69		●	
AQE1300/40L		1300	40	78	106	4	69		●	
AQE1300/50L		1300	50	78	133	4	69		●	
AQE1300×2/50L		1300x2	50	156	80	6	75		●	
AQE1650/15		1650	15	100	30	3	73	●	●	
AQE1650/30		1650	30	100	58	4	73		●	
AQE1650×2/50		1650×2	50	200	56	7	76		●	
AQE1650×3/90		1650×3	90	300	80	11	83		●	
AQE1650×4/120		1650×4	120	400	85	15	83		●	
AQE2030F		1500	30	75	134	2	85		●	
AQE2550F		1800	50	100	175	3	85		●	
AQE02-0.17/8		1500	50	170	175	6	83			
AQE0.036/8L		750	50	36	363	3	79		●	
AQE2065/100		2200	100	250	206	5	90			
AQE2065/200		2200	200	250	427	5	90			

AQE550/10L OIL- FREE AIR COMPRESSOR



Rated Power Input	550W
Rated Speed	1400/min
Max. Working Pressure	8bar
Capacity	10L
Displacement	32L/min
Net Weight	14.2kg

Features

- 550W induction motor, efficient and durable;
- 8bar working pressure output;
- Dual-cylinder compression design, for fast inflation;
- Oil-free design, providing clean air source.

Accessories & Package

- Muffler
- Foot Pad Assembly (4pcs)
- Carton Packing

AQE550/30L OIL- FREE AIR COMPRESSOR



Rated Power Input	550W
Rated Speed	1400/min
Max. Working Pressure	8bar
Capacity	30L
Displacement	32L/min
Net Weight	20.0kg

Features

- 550W induction motor, efficient and durable;
- 8bar working pressure output;
- Dual-cylinder compression design, for fast inflation;
- Oil-free design, providing clean air source.

Accessories & Package

- Muffler
- Foot Pad Assembly
- Wheel Assembly(2pcs)
- Carton Packing

AQE1080/10L OIL- FREE AIR COMPRESSOR



Rated Power Input	1080W
Rated Speed	2850/min
Max. Working Pressure	8bar
Capacity	10L
Displacement	68L/min
Net Weight	10.5kg

Features

- 1080W induction motor, efficient and durable;
- 8bar working pressure output;
- Dual-cylinder compression design, for fast inflation;
- Oil-free design, providing clean air source.

Accessories & Package

- Muffler (2pcs)
- Wheel Assembly (2pcs)
- Foot Pad Assembly (4pcs)
- Carton Packing

AQE1080/30L OIL- FREE AIR COMPRESSOR



Rated Power Input	1080W
Rated Speed	2850/min
Max. Working Pressure	8bar
Capacity	30L
Displacement	68L/min
Net Weight	16.0kg

Features

- 1080W induction motor, efficient and durable;
- 8bar working pressure output;
- Dual-cylinder compression design, for fast inflation;
- Oil-free design, providing clean air source.

Accessories & Package

- Muffler (2pcs)
- Wheel Assembly (2pcs)
- Foot Pad Assembly (4pcs)
- Carton Packing

AQE1260/10 OIL- FREE AIR COMPRESSOR



Rated Power Input	1260W
Rated Speed	2850/min
Max. Working Pressure	8bar
Capacity	10L
Displacement	75L/min
Net Weight	11.7kg

Features

- 1260W copper induction motor, efficient & durable, efficient noise reduction, attractive & collision-resistant;
- 8bar working pressure output, powerful & stable;
- Dual-cylinder compression design, for fast inflation;
- Oil-free design, providing clean air source;
- High quality noise reduction module, providing a quiet working environment.

Accessories & Package

- Grip Assembly
- Foot Pad Assembly (4pcs)
- Carton Packing

AQE1260/30 OIL- FREE AIR COMPRESSOR



Rated Power Input	1260W
Rated Speed	2850/min
Max. Working Pressure	8bar
Capacity	30L
Displacement	75L/min
Net Weight	16.0kg

Features

- 1260W copper induction motor, efficient & durable, efficient noise reduction, attractive & collision-resistant;
- 8bar working pressure output, powerful & stable;
- Dual-cylinder compression design, for fast inflation;
- Oil-free design, providing clean air source;
- High quality noise reduction module, providing a quiet working environment.

Accessories & Package

- Foot Pad Assembly
- Wheel Assembly (2pcs)
- Carton Packing

AQE1260×2/50 OIL- FREE AIR COMPRESSOR



Rated Power Input	1260W×2
Rated Speed	2850/min
Max. Working Pressure	8bar
Capacity	50L
Displacement	150L/min
Net Weight	28.8kg

Features

- 1260W copper induction motor, efficient & durable, efficient noise reduction, attractive & collision-resistant;
- 8bar working pressure output, powerful & stable;
- Dual-cylinder compression design, for fast inflation;
- Oil-free design, providing clean air source;
- High quality noise reduction module, providing a quiet working environment.

Accessories & Package

- Foot Pad Assembly (2pcs)
- Wheel Assembly (2pcs)
- Carton Packing

AQE1300/10L OIL- FREE AIR COMPRESSOR



Rated Power Input	1300W
Rated Speed	2850/min
Max. Working Pressure	8bar
Capacity	10L
Displacement	78L/min
Net Weight	13.2kg

Features

- 1300W induction motor, efficient and durable;
- 8bar working pressure output;
- Dual-cylinder compression design, for fast inflation;
- Oil-free design, providing clean air source.

Accessories & Package

- Grip Assembly
- Foot Pad Assembly (4pcs)
- Carton Packing

AQE1300/30L OIL- FREE AIR COMPRESSOR



Rated Power Input	1300W
Rated Speed	2850/min
Max. Working Pressure	8bar
Capacity	30L
Displacement	78L/min
Net Weight	17.4kg

Features

- 1300W induction motor, efficient and durable;
- 8bar working pressure output;
- Dual-cylinder compression design, for fast inflation;
- Oil-free design, providing clean air source.

Accessories & Package

- Foot Pad Assembly
- Wheel Assembly (2pcs)
- Carton Packing

AQE1300×2/50L OIL- FREE AIR COMPRESSOR



Rated Power Input	1300W×2
Rated Speed	2850/min
Max. Working Pressure	8bar
Capacity	50L
Displacement	156L/min
Net Weight	33.2kg

Features

- 1300W induction motor, efficient and durable;
- 8bar working pressure output;
- Dual-cylinder compression design, for fast inflation;
- Oil-free design, providing clean air source.

Accessories & Package

- Foot Pad Assembly (2pcs)
- Wheel Assembly (2pcs)
- Carton Packing

AQE1300/40L OIL- FREE AIR COMPRESSOR



Rated Power Input	1300W
Rated Speed	2850/min
Max. Working Pressure	8bar
Capacity	40L
Displacement	78L/min
Net Weight	21.6kg

Features

- 1300W induction motor, efficient and durable;
- 8bar working pressure output;
- Dual-cylinder compression design, for fast inflation;
- Oil-free design, providing clean air source.

Accessories & Package

- Foot Pad Assembly
- Wheel Assembly (2pcs)
- Carton Packing

AQE1300/50L OIL- FREE AIR COMPRESSOR



Rated Power Input	1300W
Rated Speed	2850/min
Max. Working Pressure	8bar
Capacity	50L
Displacement	78L/min
Net Weight	23.4kg

Features

- 1300W induction motor, efficient and durable;
- 8bar working pressure output;
- Dual-cylinder compression design, for fast inflation;
- Oil-free design, providing clean air source.

Accessories & Package

- Foot Pad Assembly (2pcs)
- Wheel Assembly (2pcs)
- Carton Packing

AQE1650/15 OIL- FREE AIR COMPRESSOR



Rated Power Input	1650W
Rated Speed	2850/min
Max. Working Pressure	8bar
Capacity	15L
Displacement	100L/min
Net Weight	15.9kg

Features

- 1650W copper induction motor, efficient & durable, efficient noise reduction, attractive & collision-resistant;
- 8bar working pressure output, powerful & stable;
- Dual-cylinder compression design, for fast inflation;
- Oil-free design, providing clean air source;
- High quality noise reduction module, providing a quiet working environment.

Accessories & Package

- Grip Assembly
- Foot Pad Assembly (4pcs)
- Carton Packing

AQE1650/30 OIL- FREE AIR COMPRESSOR



Rated Power Input	1650W
Rated Speed	2850/min
Max. Working Pressure	8bar
Capacity	30L
Displacement	100L/min
Net Weight	19.1kg

Features

- 1650W copper induction motor, efficient & durable, efficient noise reduction, attractive & collision-resistant;
- 8bar working pressure output, powerful & stable;
- Dual-cylinder compression design, for fast inflation;
- Oil-free design, providing clean air source;
- High quality noise reduction module, providing a quiet working environment.

Accessories & Package

- Foot Pad Assembly
- Wheel Assembly (2pcs)
- Carton Packing

AQE1650×2/50 OIL- FREE AIR COMPRESSOR




Rated Power Input	1650W×2
Rated Speed	2850/min
Max. Working Pressure	8bar
Capacity	50L
Displacement	200L/min
Net Weight	36.7kg

Features

- 1650W copper induction motor, efficient & durable, efficient noise reduction, attractive & collision-resistant;
- 8bar working pressure output, powerful & stable;
- Dual-cylinder compression design, for fast inflation;
- Oil-free design, providing clean air source;
- High quality noise reduction module, providing a quiet working environment.

Accessories & Package

- Foot Pad Assembly (2pcs)
- Wheel Assembly (2pcs)
- Carton Packing

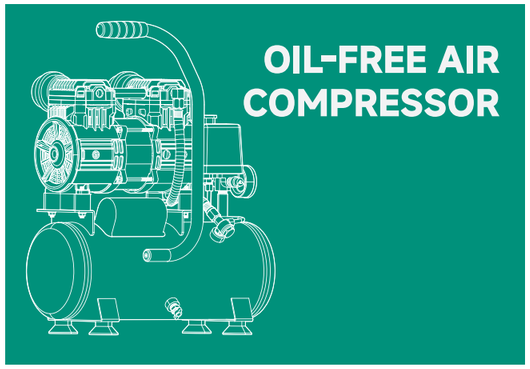


POWERFUL AND EFFICIENT
SAFE AND DURABLE

1300W INDUCTION MOTOR
Efficient and durable

HIGH QUALITY NOISE REDUCTION MODULE
Providing a quiet working environment

OIL-FREE DESIGN; MAINTENANCE-FREE
Providing cleaner air source

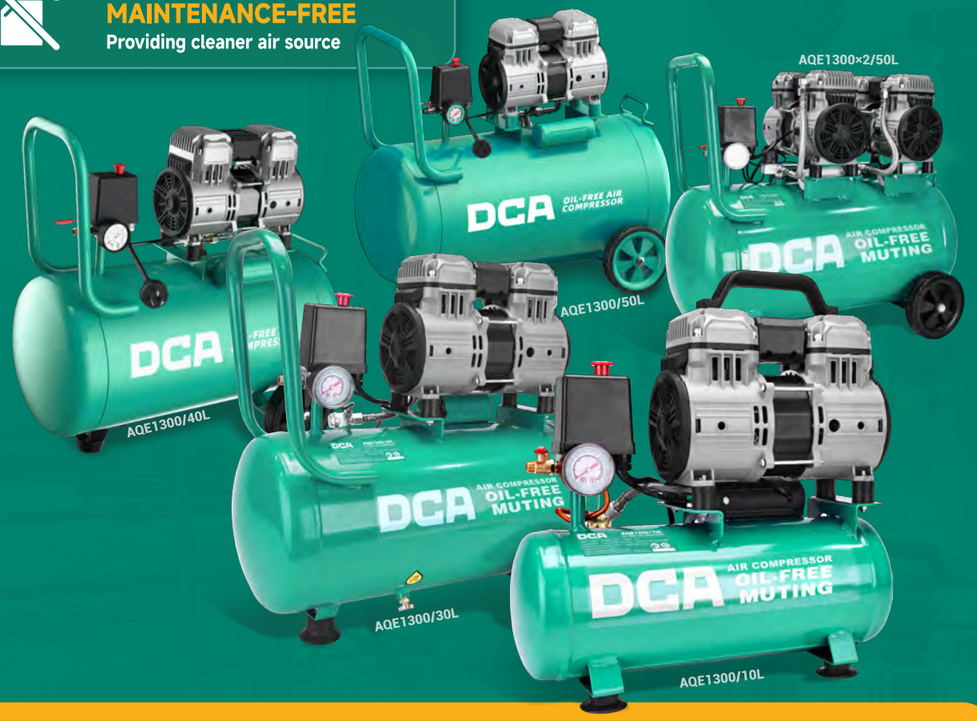

AQE1300/10L AQE1300/30L
AQE1300/40L AQE1300/50L
AQE1300×2/50L

OIL- FREE AIR COMPRESSOR

*Specifications may differ from country to country.

AQE2030F/AQE2550F DIRECT DRIVE AIR COMPRESSOR

NEW

SPECIALLY ENGINEERED AIR DUCT HOUSING
Superior heat dissipation& longer lifespan

8bar WORKING PRESSURE OUTPUT
Powerful& stable



ADJUSTABLE OUTLET PRESSURE
Adapt to diverse air consumptionworking conditions

SPECIAL-MATERIAL VALVE PLATE
Quicker air pumping

Rated Power Input	1500/1800W
Rated Speed	2850/min
Working Pressure	8bar
Capacity	30/50L
Displacement	75/100L/min
Net Weight	18.3/25.3kg



Accessories & Package
• Foot Pad Assembly (1pcs) • Wheel Assembly (2pcs) • Silencer • Carton Packing

AQE2065/100/AQE2065/200 BELT AIR COMPRESSOR

NEW

ALUMINUM PUMP HEAD
Fast heat dissipation & long service life

LARGER AIR TANK
Huge air storage, suitable for various air consumption scenarios



8bar WORKING PRESSURE OUTPUT
Powerful &stable

OPPOSED VERTICAL DOUBLE PISTONS
Smooth operation, low vibration &noise

Rated Power Input	2200W
Rated Speed	920/min
Working Pressure	8bar
Capacity	100/200L
Displacement	250L/min
Net Weight	63/87kg



Accessories & Package
• Wheel Assembly (4pcs) • Silencer • Hand Grip • Wooden Box

AQE0.036/8L BELT AIR COMPRESSOR



Rated Power Input	750W
Rated Speed	1155/min
Max. Working Pressure	8bar
Capacity	50L
Displacement	36L/min
Net Weight	32.8kg

Features

- Belt drive, low noise & smooth operation;
- Cast iron pump head, high strength & long service life;
- High-efficiency motor, fast air supply, suitable for various applications.

Accessories & Package

- Wheel Assembly (4pcs) • Silencer • Wooden Box

AQE02-0.17/8 BELT AIR COMPRESSOR



Rated Power Input	1500W
Rated Speed	1120/min
Max. Working Pressure	8bar
Capacity	50L
Displacement	0.17m³/min
Net Weight	51.0kg

Features

- 1500W induction motor, efficient and durable;
- 8bar working pressure output;
- Dual-cylinder compression design, for fast inflation;
- Fully enclosed net cover, protect user safety.

Accessories & Package

- Muffler(2pcs) • Wheel Assembly (4pcs) • Carton Packing

APB598 AIR IMPACT WRENCH



Working Pressure	6-8bar
No-load Speed	8500/min
Max. Torque	598N·m
Standard Bolt Size	M16
Inner Dia. of Air Pipe	5mm
Square Drive Size	12.7mm(1/2")
Net Weight	2.8kg

Features

- True 598N.m high torque, no false labeling;
- 1/2 inch alloy steel drive shaft, sturdy and durable;
- Front muffler exhaust for smooth airflow & low noise;
- Forward/ reverse + 6-speed adjustment for easy operation.

Accessories & Package

- Pneumatic Quick Connectors (1pc) • Oil Bottle • Carton Packing

APB798 AIR IMPACT WRENCH



Working Pressure	6-8bar
No-load Speed	5200/min
Max. Torque	798N·m
Standard Bolt Size	M18
Inner Dia. of Air Pipe	5mm
Square Drive Size	12.7mm(1/2")
Net Weight	3.2kg

Features

- True 798N.m high torque, no false labeling;
- 1/2 inch alloy steel drive shaft, sturdy and durable;
- Front muffler exhaust for smooth airflow & low noise;
- Forward/ reverse + 6-speed adjustment for easy operation.

Accessories & Package

- Pneumatic Quick Connectors (1pc) • Oil Bottle • Carton Packing

APB1598 AIR IMPACT WRENCH



Working Pressure	6-10bar
No-load Speed	4300/min
Max. Torque	1598N·m
Standard Bolt Size	M36
Inner Dia. of Air Pipe	8mm
Square Drive Size	19.1mm(3/4")
Net Weight	7.25kg

Features

- True 1598N.m high torque, no false labeling;
- 3/4 inch alloy steel drive shaft, sturdy and durable;
- Front muffler exhaust for smooth airflow & low noise;
- Forward/ reverse + 6-speed adjustment for easy operation.

Accessories & Package

- Pneumatic Quick Connectors (1pc) • Oil Bottle • Carton Packing

APB2598 AIR IMPACT WRENCH



Working Pressure	6-10bar
No-load Speed	5000/min
Max. Torque	2598N·m
Standard Bolt Size	M45
Inner Dia. of Air Pipe	8mm
Square Drive Size	25mm(1")
Net Weight	20.3kg

Features

- True 2598N.m high torque, no false labeling;
- 1 inch alloy steel drive shaft, sturdy and durable;
- Front muffler exhaust for smooth airflow & low noise;
- Forward/ reverse + 6-speed adjustment for easy operation.

Accessories & Package

- Pneumatic Quick Connectors (1pc) • Oil Bottle • Carton Packing



SPRAY GUN—Pressure Feed (For Use With Diaphragm Pump)



Model	Standard Nozzle (mm)	Recommended Conditions		Air Consumption (L/min)	Spraying Width (mm)	Weight (g)
		Operating Pressure MPa (kgf/cm²)	Max Paint Flow (mL/min)			
W-71-1.3P	1.3	0.34 (3.5)	300	220	260	450
W-71-1.5P	1.5	0.34 (3.5)	400	225	275	450
W-71-1.8P	1.8	0.34 (3.5)	300	220	270	450

Accessories & Package

Wrench, Cleaning Brush • Air Pipe Connector • Oil Pipe Connector • Carton Packing

SPRAY GUN—Gravity Feed



Model	Standard Nozzle (mm)	Recommended Conditions		Air Consumption (L/min)	Spraying Width (mm)	Weight (g)
		Operating Pressure MPa (kgf/cm²)	Max Paint Flow (mL/min)			
W-71-1.0G	1.0	0.29 (3.0)	120	85	120	620
W-71-1.3G	1.3	0.29 (3.0)	160	195	165	620
W-71-1.5G	1.5	0.29 (3.0)	190	230	185	620
W-71-1.8G	1.8	0.29 (3.0)	220	230	230	620
W-77-2.0G	2.0	0.29 (3.0)	340	370	335	750
W-77-2.5G	2.5	0.29 (3.0)	360	455	350	750
W-77-3.0G	3.0	0.29 (3.0)	380	480	360	750

Accessories & Package

Wrench • Cleaning Brush • Air Pipe Connector • Paint Container • Carton Packing


SPRAY GUN—Siphon Feed



Model	Standard Nozzle (mm)	Recommended Conditions		Air Consumption (L/min)	Spraying Width (mm)	Weight (g)
		Operating Pressure MPa (kgf/cm²)	Max Paint Flow (mL/min)			
W-71-1.0S	1.0	0.29 (3.0)	100	85	110	690
W-71-1.3S	1.3	0.29 (3.0)	140	195	155	690
W-71-1.5S	1.5	0.29 (3.0)	170	230	170	690
W-71-1.8S	1.8	0.29 (3.0)	195	230	200	690
W-77-2.0S	2.0	0.29 (3.0)	340	350	280	830
W-77-2.5S	2.5	0.29 (3.0)	360	435	300	830
W-77-3.0S	3.0	0.29 (3.0)	380	460	320	830
W-77-3.5S	3.5	0.34 (3.5)	480	400	330	830

Accessories & Package

Wrench • Cleaning Brush • Air Pipe Connector • Paint Container • Carton Packing

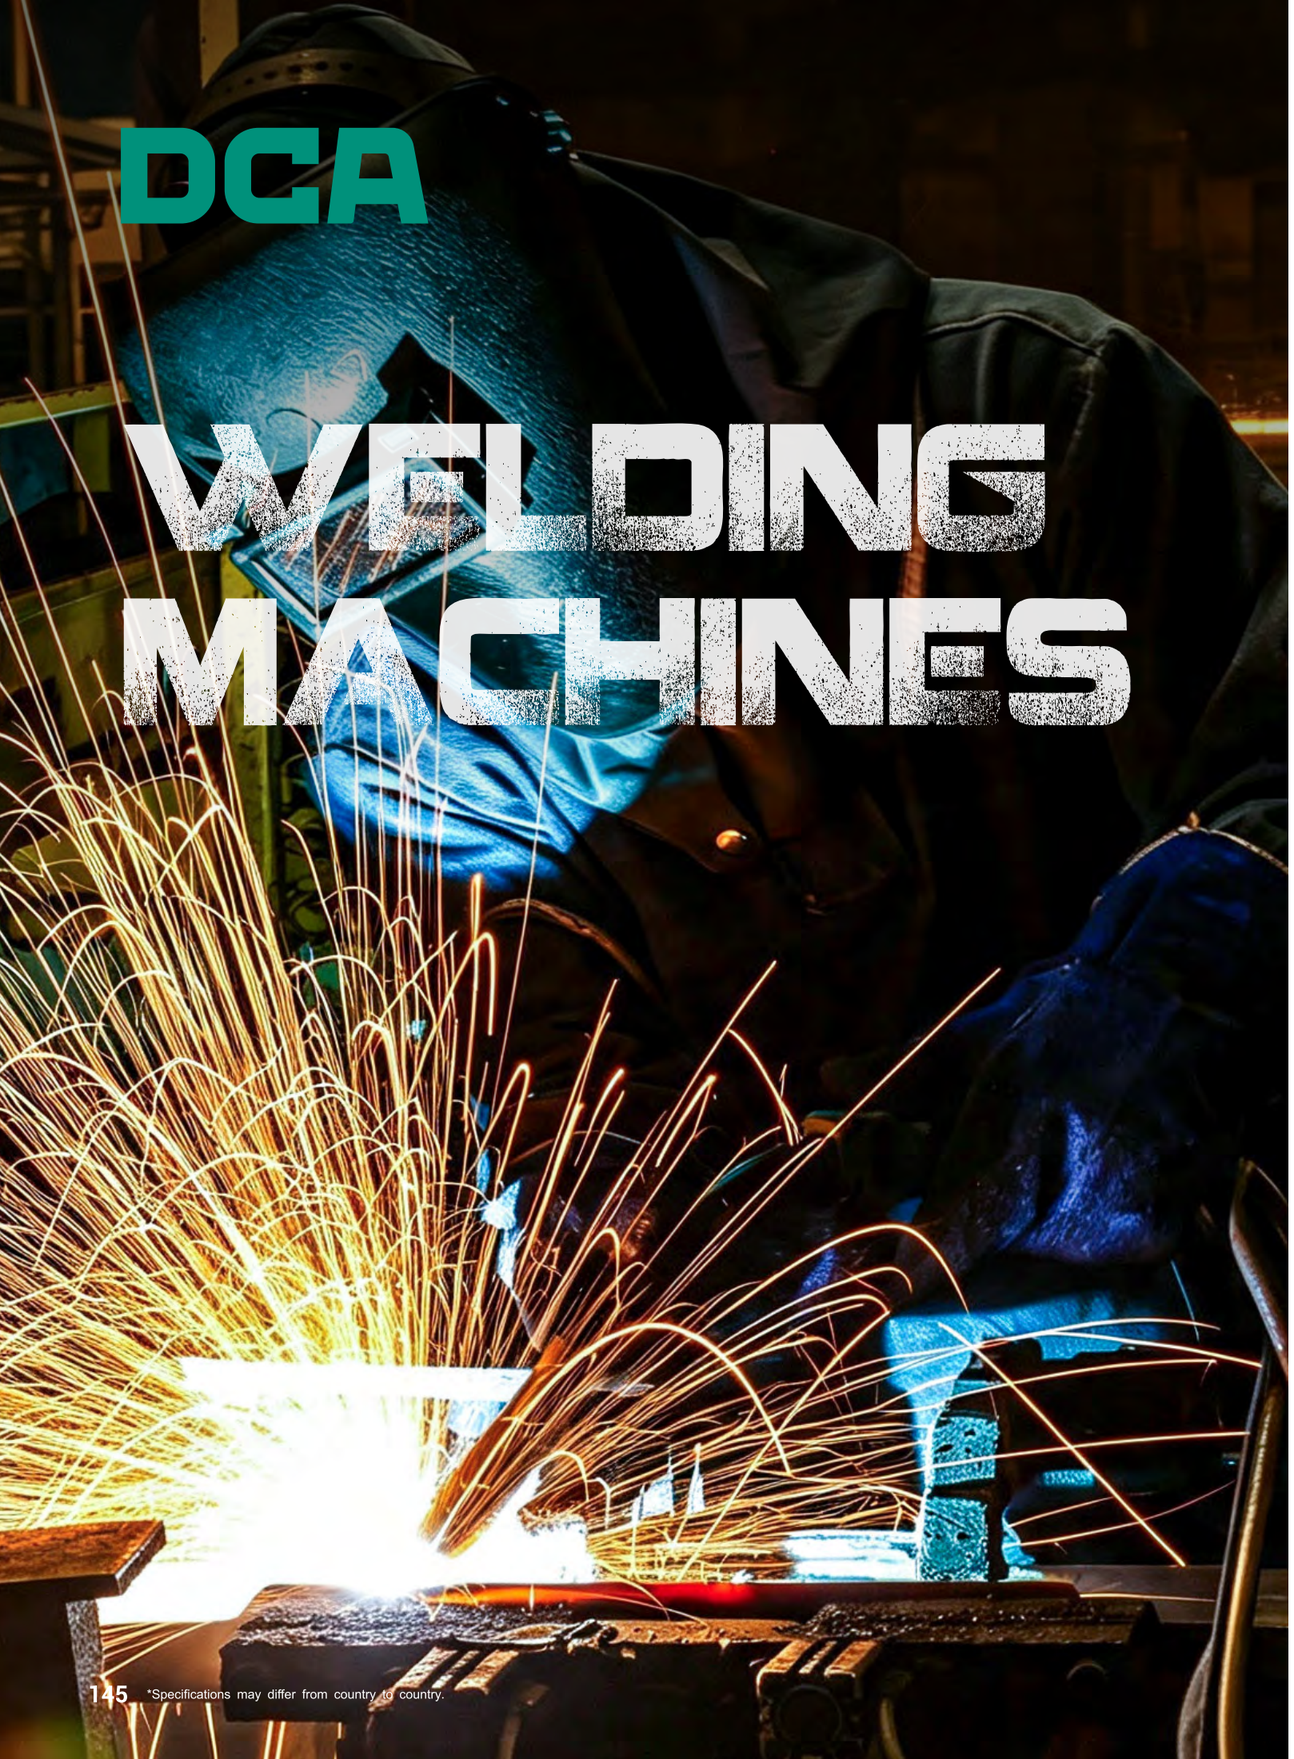

*Specifications may differ from country to country.

MMA200(III)/MMA200(I) INTELLIGENT ARC WELDING MACHINE



DIGITAL DISPLAY SCREEN
Welding current can be seen in real time

120A REAL MAX. CURRENT

ONE BUTTON START WELDING
Working efficiently

3kg LIGHTWEIGHT AND COMPACT BODY
Easy to carry

Input Voltage			AC 220V/AC 240V
Frequency(Hz)			50-60
Rated Output Current/Output Voltage			50A/22V
			120A/24.8V
No-load Voltage(V)			57/63
Rated Duty Cycle	20%	60%	100%
	120A	69A	53A
	24.8V	22.7V	22.1V
Effciency			0.65
Housing Protection Grade			IP21S
Power Factor			0.7
Insulation Grade			F
Dimensions(mm)			305*130*215
Weight(kg)			3.0

Accessories & Package

- 2.2m 3 × 1.5 Power Cord (Excluding Plug)
- 2m 16mm² Cable+300A Ground Clamp+10–25 Quick Plug
- 2m 16mm² Cable+KB200A Welding Plier+10–25 Quick Plug
- Carton Packing



Ground Clamp



Welding Plier

Welding Electrode Diameter(mm)	ϕ2.0	ϕ2.5	ϕ3.2	ϕ4.0	ϕ5.0
Welding Current(A)	40-70	60-100	80-140	140-220	180-240

MMA250(III)/MMA250(I) INTELLIGENT ARC WELDING MACHINE



DIGITAL DISPLAY SCREEN
Welding current can be seen in real time

140A REAL MAX. CURRENT

ONE BUTTON START WELDING
Working efficiently

3kg LIGHTWEIGHT AND COMPACT BODY
Easy to carry

Input Voltage			AC 220V/AC 240V
Frequency(Hz)			50-60
Rated Output Current/Output Voltage			50A/22V
			140A/25.6V
No-load Voltage(V)			57/63
Rated Duty Cycle	20%	60%	100%
	140A	80A	62A
	25.6V	23.2V	22.4V
Effciency			0.65
Housing Protection Grade			IP21S
Power Factor			0.7
Insulation Grade			F
Dimensions(mm)			305*130*215
Weight(kg)			3.0

Accessories & Package

- 2.2m 3 × 2.5 Power Cord (Excluding Plug)
- 2m 16mm² Cable+300A Ground Clamp+10–25 Quick Plug
- 2m 16mm² Cable+KB200A Welding Plier+10–25 Quick Plug
- Carton Packing



Ground Clamp



Welding Plier

Welding Electrode Diameter(mm)	ϕ2.0	ϕ2.5	ϕ3.2	ϕ4.0	ϕ5.0
Welding Current(A)	40-70	60-100	80-140	140-220	180-240

MMA250D(III)/MMA250D(I) INTELLIGENT ARC WELDING MACHINE



DIGITAL DISPLAY SCREEN
Welding current can be seen in real time

150A REAL MAX. CURRENT

SMART CONTROL
Automatically match parameters by adjusting the welding rod diameter

VRD: VOLTAGE REDUCTION DEVICE
Automatic reduction of output voltage for decreased risk of electric shock

Input Voltage	AC 220V/380V/AC 240V
Frequency(Hz)	50-60
Rated Output Current/Output Voltage	30A/21.2V/50A/22V
	150A/26V/150A/26V
No-load Voltage(V)	71/61
Rated Duty Cycle	30% 60% 100%/20% 60% 100%
	150A 106A 82A 150A 86.1A 67A
	26V 24.2V 23.2V 26V 23.4V 22.68V
Effciency	0.65/0.85
Housing Protection Grade	IP21S
Power Factor	0.7
Insulation Grade	F
Dimensions(mm)	360*170*300
Weight(kg)	4.5

Accessories & Package

- 2.2m 3 × 2.5 Power Cord (Excluding Plug)
- 2m 16mm² Cable+300A Ground Clamp+10–25 Quick Plug
- 2m 16mm² Cable+KB200A Welding Plier+10–25 Quick Plug
- Carton Packing



Ground Clamp



KB200A Welding Plier

Welding Electrode Diameter(mm)	ϕ2.0	ϕ2.5	ϕ3.2	ϕ4.0	ϕ5.0
Welding Current(A)	40-70	60-100	80-140	140-220	180-240

MMA315DT(III)/MMA315DT(I) INTELLIGENT ARC WELDING MACHINE



DIGITAL DISPLAY SCREEN
Welding current can be seen in real time

160A REAL MAX. CURRENT

SMART CONTROL
Automatically match parameters by adjusting the welding rod diameter

VRD: VOLTAGE REDUCTION DEVICE
Automatic reduction of output voltage for decreased risk of electric shock

Input Voltage	AC 220V/380V/AC 240V
Frequency(Hz)	50-60
Rated Output Current/Output Voltage	30A/21.2V/50A/22V
	160A/26.4V/160A/26.4V
No-load Voltage(V)	71/61
Rated Duty Cycle	30% 60% 100% / 20% 60% 100%
	160A 113A 87A 160A 91.9A 71.5A
	26.4V 24.5V 23.4V 26.4V 23.7V 22.8V
Effciency	0.65/0.85
Housing Protection Grade	IP21S
Power Factor	0.7
Insulation Grade	F
Dimensions(mm)	350*210*310
Weight(kg)	5.0

Accessories & Package

- 2.2m 3 × 2.5 Power Cord (Excluding Plug)
- 2m 20mm² Cable+300A Ground Clamp+35–50 Quick Plug
- 2m 20mm² Cable+KB200A Welding Plier+35–50 Quick Plug
- Carton Packing



300A Ground Clamp



KB200A Welding Plier

Welding Electrode Diameter(mm)	ϕ2.0	ϕ2.5	ϕ3.2	ϕ4.0	ϕ5.0
Welding Current(A)	40-70	60-100	80-140	140-220	180-240

*Specifications may differ from country to country.

MMA315D(III)/MMA315D(I) INTELLIGENT ARC WELDING MACHINE



DIGITAL DISPLAY SCREEN
Welding current can be seen in real time

190A REAL MAX. CURRENT

SMART CONTROL
Automatically match parameters by adjusting the welding rod diameter

VRD: VOLTAGE REDUCTION DEVICE
Automatic reduction of output voltage for decreased risk of electric shock

Input Voltage	AC 220V/380V/AC 240V
Frequency(Hz)	50-60
Rated Output Current/Output Voltage	30A/21.2V/50A/22V
	190A/27.6V/180A/27.2V
No-load Voltage(V)	77/62
Rated Duty Cycle	30% 60% 100% / 20% 60% 100%
	190A 134A 104A 180A 103A 80A
	27.6V 25.3V 24.1V 27.2V 24.1V 23.2V
Effciency	0.65/0.85
Housing Protection Grade	IP21S
Power Factor	0.7
Insulation Grade	F
Dimensions(mm)	410*210*370
Weight(kg)	7.0

Accessories & Package

- 2.2m 3 × 2.5 Power Cord (Excluding Plug)
- 2m 25mm² Cable+300A Ground Clamp+35–50 Quick Plug
- 2m 25mm² Cable+American Style 300A Welding Plier+35–50 Quick Plug
- Carton Packing



Ground Clamp



Welding Plier

Welding Electrode Diameter(mm)	ϕ2.0	ϕ2.5	ϕ3.2	ϕ4.0	ϕ5.0
Welding Current(A)	40-70	60-100	80-140	140-220	180-240

MMA400D(III)/MMA400D(I) INTELLIGENT ARC WELDING MACHINE



DIGITAL DISPLAY SCREEN
Welding current can be seen in real time

260A REAL MAX. CURRENT

SMART CONTROL
Automatically match parameters by adjusting the welding rod diameter

VRD: VOLTAGE REDUCTION DEVICE
Automatic reduction of output voltage for decreased risk of electric shock

Input Voltage	AC 220V/380V		3~AC 380V	AC 240V
Frequency(Hz)				50-60
Rated Output Current	30A/21.2V	30A/21.2V	30A/21.2V	50A/22V
/Output Voltage	190A/27.6V	240A/29.6V	260A/30.4V	200A/28V
No-load Voltage(V)				77/60.5
Rated Duty Cycle	30% 60% 100%/	30% 60% 100%/	30% 60% 100%/	40% 60% 100%
	190A 134A 104A	240A 169A 131A	260A 183A 142A	200A 162A 126A
	27.6V 25.3V 24.1V	29.6V 26.7V 25.2V	30.4V 27.3V 25.6V	28V 26.5V 25V
Effciency				0.65/0.85
Housing Protection Grade				IP21S
Power Factor				0.7
Insulation Grade				F
Dimensions(mm)				410*210*370
Weight(kg)				8.0

Accessories & Package

- 2m 25mm² Cable+300A Ground Clamp+35–50 Quick Plug
- 2m 25mm² Cable+American Style 300A Welding Plier+35–50 Quick Plug
- Carton Packing



Ground Clamp



Welding Plier

Welding Electrode Diameter(mm)	ϕ2.0	ϕ2.5	ϕ3.2	ϕ4.0	ϕ5.0
Welding Current(A)	40-70	60-100	80-140	140-220	180-240

MIG130 DC MIG WELDING MACHINE



DIGITAL DISPLAY SCREEN
Welding current can be seen in real time

MORE RELIABLE
Equipped with latest high grade IGBT technology

MULTI-FUNCTIONAL
Gas MIG+gasless MIG+manual arc welding+ lift scratch TIG welding

MORE SAFE
VRD Anti-shock

Input Voltage			1~230V±15%
Frequency(Hz)			50-60
Rated Output Current/Output Voltage			40A/16V
			120A/20V
No-load Voltage(V)			55
Rated Duty Cycle	20%	60%	100%
	120A	70A	54A
	20V	17.5V	16.7V
Effciency			0.80
Housing Protection Grade			IP21S
Power Factor			0.8
Insulation Grade			F
Dimensions(mm)			405*255*360
Weight(kg)			3.9

Accessories & Package

- One MIG torch 2m
- 2m Cable+Ground Clamp+Quick Plug
- 2m Cable+Welding Plier+Quick Plug
- Carton Packing


MIG Torch


Ground Clamp


Welding Plier

MIG160 DC MIG WELDING MACHINE



DIGITAL DISPLAY SCREEN
Welding current can be seen in real time

MORE RELIABLE
Equipped with latest high grade IGBT technology

MULTI-FUNCTIONAL
Gas MIG+gasless MIG+manual arc welding+ lift scratch TIG welding

MORE SAFE
VRD Anti-shock

Input Voltage			1~230V±15%
Frequency(Hz)			50-60
Rated Output Current/Output Voltage			40A/16V
			140A/21V
No-load Voltage(V)			55
Rated Duty Cycle	20%	60%	100%
	140A	81A	63A
	21V	18V	17.2V
Effciency			0.80
Housing Protection Grade			IP21S
Power Factor			0.8
Insulation Grade			F
Dimensions(mm)			430*255*360
Weight(kg)			4.25

Accessories & Package

- One MIG torch 2.2m
- 2m Cable+Ground Clamp+Quick Plug
- 2m Cable+Welding Plier+Quick Plug
- Carton Packing


MIG Torch


Ground Clamp


Welding Plier

 *Specifications may differ from country to country.

MIG180 DC MIG WELDING MACHINE



DIGITAL DISPLAY SCREEN
Welding current can be seen in real time

MORE RELIABLE
Equipped with latest high grade IGBT technology

MULTI-FUNCTIONAL
Gas MIG+gasless MIG+manual arc welding+ lift scratch TIG welding

MORE SAFE
VRD Anti-shock

Input Voltage			1~230V±15%
Frequency(Hz)			50-60
Rated Output Current/Output Voltage			50A/16.5V
			160A/22V
No-load Voltage(V)			55
Rated Duty Cycle	20%	60%	100%
	160A	93A	72A
	22V	18.7V	17.6V
Effciency			0.80
Housing Protection Grade			IP21S
Power Factor			0.75
Insulation Grade			F
Dimensions(mm)			455*190*295
Weight(kg)			7.75

Accessories & Package

- One MIG torch 3m
- 2m Cable+Ground Clamp+Quick Plug
- 2m Cable+Welding Plier+Quick Plug
- Carton Packing


MIG Torch


Ground Clamp


Welding Plier

MIG200 DC MIG WELDING MACHINE



DIGITAL DISPLAY SCREEN
Welding current can be seen in real time

MORE RELIABLE
Equipped with latest high grade IGBT technology

MULTI-FUNCTIONAL
Gas MIG+gasless MIG+manual arc welding+ lift scratch TIG welding

MORE SAFE
VRD Anti-shock

Input Voltage			1~230V±15%
Frequency(Hz)			50-60
Rated Output Current/Output Voltage			30A/15.5V
			180A/23V
No-load Voltage(V)			55
Rated Duty Cycle	20%	60%	100%
	180A	103A	80A
	23V	19.2V	18V
Effciency			0.80
Housing Protection Grade			IP21S
Power Factor			0.72
Insulation Grade			F
Dimensions(mm)			455*190*295
Weight(kg)			8.1

Accessories & Package

- One MIG torch 3m
- 2m Cable+Ground Clamp+Quick Plug
- 2m Cable+Welding Plier+Quick Plug
- Carton Packing


MIG Torch


Ground Clamp


Welding Plier

MIG250 DC MIG WELDING MACHINE



DIGITAL DISPLAY SCREEN
Welding current can be seen in real time

MORE RELIABLE
Equipped with latest high grade IGBT technology

MULTI-FUNCTIONAL
Gas MIG+gasless MIG+manual arc welding+ lift scratch TIG welding

MORE SAFE
VRD Anti-shock

Input Voltage			1~230V±15%
Frequency(Hz)			50-60
Rated Output Current/Output Voltage			30A/15.5V
			200A/24V
No-load Voltage(V)			55
Rated Duty Cycle	20%	60%	100%
	200A	115A	89A
	24V	19.8V	18.5V
Effciency			0.80
Housing Protection Grade			IP21S
Power Factor			0.72
Insulation Grade			F
Dimensions(mm)			480*230*360
Weight(kg)			12

Accessories & Package

- One MIG torch 3m
- 2m Cable+Ground Clamp+Quick Plug
- 2m Cable+Welding Plier+Quick Plug
- Carton Packing


MIG Torch


Ground Clamp


Welding Plier

MMA200S DC ARC WELDING MACHINE



DIGITAL DISPLAY SCREEN
Intuitive Human-Machine Interaction

EASY TO CARRY
Compact and lightweight body

MULTI-FUNCTIONAL
MMA+lift scratch TIG welding

MORE SAFE
VRD Anti-shock

Input Voltage			1~110-120V±15%
Frequency(Hz)			50-60
Rated Output Current/Output Voltage			20A/20.8V
			120A/24.8V
No-load Voltage(V)			74
Rated Duty Cycle	10%	60%	100%
	120A	49A	38A
	24.8V	22V	21.5V
Effciency			0.85
Housing Protection Grade			IP21S
Power Factor			0.7
Insulation Grade			H
Dimensions(mm)			280*135*190
Weight(kg)			2.7

Accessories & Package

- 2m Cable+Ground Clamp+Quick Plug
- 4m Cable+Welding Plier+Quick Plug


Ground Clamp


Welding Plier

Welding Electrode Diameter(mm)	ϕ2.0	ϕ2.5	ϕ3.2	ϕ4.0	ϕ5.0
Welding Current(A)	40-70	60-100	80-140	140-220	180-240

*Specifications may differ from country to country.

MMA225S DC ARC WELDING MACHINE



DIGITAL DISPLAY SCREEN
Intuitive Human-Machine Interaction

EASY TO CARRY
Compact and lightweight body

MULTI-FUNCTIONAL
MMA+lift scratch TIG welding

MORE SAFE
VRD Anti-shock

Input Voltage			1~110/220V±15%
Frequency(Hz)			50-60
Rated Output Current/Output Voltage			20A/20.8V
		100A/24V	120A/24.8V
No-load Voltage(V)			77/68
Rated Duty Cycle	15%	60%	100%
	120A	59A	46A
	24.8V	22.4V	21.8V
Effciency			0.85
Housing Protection Grade			IP21S
Power Factor			0.7
Insulation Grade			H
Dimensions(mm)			320*135*190
Weight(kg)			3.1

Accessories & Package

- 2m Cable+Ground Clamp+Quick Plug
- 4m Cable+Welding Plier+Quick Plug


Ground Clamp


Welding Plier

Welding Electrode Diameter(mm)	ϕ2.0	ϕ2.5	ϕ3.2	ϕ4.0	ϕ5.0
Welding Current(A)	40-70	60-100	80-140	140-220	180-240

MIG130SE DC MIG WELDING MACHINE



DIGITAL DISPLAY SCREEN
More intuitive operation

EASY TO CARRY
Compact and lightweight body

MULTI-FUNCTIONAL
Gasless+MMA+lift scratch TIG welding

DIGITAL CONTROL
Synergic control, anti-stick, hot start, arc force

Input Voltage			1~110/220V±15%
Frequency(Hz)			50-60
Rated Output Current/Output Voltage			30A/21.2V
			120A/20V
No-load Voltage(V)			74/65
Rated Duty Cycle	20%	60%	100%
	120A	70A	54A
	20V	22.8V	16.7V
Effciency			0.85
Housing Protection Grade			IP21S
Power Factor			0.7
Insulation Grade			H
Dimensions(mm)			354*175*295
Weight(kg)			4.7


Accessories & Package

- One MIG torch 2.2m
- 1.4m Cable+Ground Clamp+Quick Plug
- 1.6m Cable+Welding Plier+Quick Plug
- Steel Brush • Handheld Face Mask • Carton Packing


MIG Torch


Ground Clamp


Welding Plier


Steel Brush


Handheld Face Mask

MIG160SE DC MIG WELDING MACHINE



DIGITAL DISPLAY SCREEN
More intuitive operation

EASY TO CARRY
Compact and lightweight body

MULTI-FUNCTIONAL
Gasless+MMA+lift scratch TIG welding

DIGITAL CONTROL
Synergic control, anti-stick, hot start, arc force

Input Voltage			1~110/220V±15%
Frequency(Hz)			50-60
Rated Output Current/Output Voltage			30A/21.2V
		120A/20V	140A/21V
No-load Voltage(V)			76/67
Rated Duty Cycle	20%	60%	100%
	140A	81A	63A
	21V	18V	17V
Effciency			0.85
Housing Protection Grade			IP21S
Power Factor			0.7
Insulation Grade			H
Dimensions(mm)			460*220*320
Weight(kg)			8.7

Accessories & Package

- One MIG torch 2.2m
- 1.4m Cable+Ground Clamp+Quick Plug
- 1.6m Cable+Welding Plier+Quick Plug
- Steel Brush • Handheld Face Mask • Carton Packing


MIG Torch


Ground Clamp


Welding Plier


Steel Brush


Handheld Face Mask

MIG200SE DC MIG WELDING MACHINE



DIGITAL DISPLAY SCREEN
More intuitive operation

EASY TO CARRY
Compact and lightweight body

MULTI-FUNCTIONAL
MMA+MAG+MIG+LIFT TIG

DUAL VOLTAGE INPUT
Suitable for more working sites

Input Voltage			1~110/220V±15%
Frequency(Hz)			50-60
Rated Output Current/Output Voltage			30A/21.2V
		100A/19V	160A/22V
No-load Voltage(V)			76/67
Rated Duty Cycle	20%	60%	100%
	160A	93A	72A
	22V	18.7V	17.6V
Effciency			0.85
Housing Protection Grade			IP21S
Power Factor			0.73
Insulation Grade			H
Dimensions(mm)			460*220*320
Weight(kg)			8.7

Accessories & Package

- One MIG Torch 3m
- 1.4m Cable+Ground Clamp+Quick Plug
- 1.6m Cable+Welding Plier+Quick Plug
- Steel Brush • Handheld Face Mask


MIG Torch


Ground Clamp


Welding Plier


Steel Brush


Handheld Face Mask

*Specifications may differ from country to country.

TIG200S DC TIG WELDING MACHINE



DIGITAL DISPLAY SCREEN
More intuitive operation

EASY TO CARRY
Compact and lightweight body

MULTI-FUNCTIONAL
MMA+DC TIG + Pulsed DC TIG Functions

DUAL VOLTAGE INPUT
Suitable for more working sites

Input Voltage			1~110-120V±15%
Frequency(Hz)			50-60
Rated Output Current/Output Voltage			15A/10.6V
			130A/15.2V
No-load Voltage(V)			68
Rated Duty Cycle	20%	60%	100%
	130A	75A	58A
	15.2V	13V	12.3V
Effciency			0.85
Housing Protection Grade			IP21S
Power Factor			0.73
Insulation Grade			H
Dimensions(mm)			360*170*260
Weight(kg)			5.8

Accessories & Package

- One TIG Torch 2m
- 2m Cable+Ground Clamp+Quick Plug
- 2m Cable+Welding Plier+Quick Plug


TIG Torch


Ground Clamp


Welding Plier

TIG250S DC TIG WELDING MACHINE



DIGITAL DISPLAY SCREEN
More intuitive operation

EASY TO CARRY
Compact and lightweight body

MULTI-FUNCTIONAL
MMA+DC TIG + Pulsed DC TIG Functions

DUAL VOLTAGE INPUT
Suitable for more working sites

Input Voltage			1~110-120V±15%
Frequency(Hz)			50-60
Rated Output Current/Output Voltage			15A/10.6V
			160A/16.4V
No-load Voltage(V)			68
Rated Duty Cycle	20%	60%	100%
	160A	93A	72A
	16.4V	13.7V	12.9V
Effciency			0.85
Housing Protection Grade			IP21S
Power Factor			0.73
Insulation Grade			H
Dimensions(mm)			360*170*260
Weight(kg)			5.8

Accessories & Package

- One TIG Torch 2m
- 2m Cable+Ground Clamp+Quick Plug
- 2m Cable+Welding Plier+Quick Plug


TIG Torch


Ground Clamp


Welding Plier

AQGZ50 GASOLINE WATER PUMP



Power	Single-cylinder/4-stroke/Forced-air-cooled 192F
Displacement	212cc
Rated Power	4.0kW
Rated Speed	3600/min
Input/output Diameter	50 (2")mm
Pumping Head	20m
Flow	20m³/h
Self-priming Height	5m
Self-priming Time	≤140s
Weight	25.0kg

Features

- 4–stroke power system,energy–saving and efficient;
- 3600rpm high speed, high flow rate for long drainage range;
- 50mm (2") import and export diameter, 20m³/h large drainage volume.

Accessories & Package

- Oil Funnel • Water Filter • Holt Hoop Iron (3pcs) • Outlet & Inlet Water Pipe Connector (2pcs)
- Screwdriver • Spark Plug Socket Wrench • Carton Packing

AZQB-550A PERIPHERAL PUMP



Max. Power	0.72kW/0.9HP
Max. Flow	45L/min
Max. Lift	46m
Rated Power	0.55kW/0.75HP
Rated Lift	14.8m
Rated Flow	28L/min
Pipe Dia.	1"x1"
Suction	8m
Net Weight	7.7kg

Features

- Copper wire motor; for Low temperature rise, high efficiency and strong power;
- Over–temperature protection, for stable running and good durability;
- Compact body, meeting different working scenarios;
- Copper impeller, for powerful suction and rapid water filling;
- Electrophoretic casting, anti–rust and corrosion–resistant, suitable for harsh environments.

Accessories & Package

- Carton Packing

AZB-200B INTELLIGENT SELF-PRIMING BOOSTER PUMP



Max. Power	0.43kW/0.6HP
Max. Flow	37L/min
Max. Lift	31m
Rated Power	0.2kW/0.3HP
Rated Lift	10m
Rated Flow	23L/min
Pipe Dia.	1"x1"
Suction	8m
Net Weight	6.95kg

Features

- Powerful boost, copper motor, strong power and rapid pressurization;
- Dual control, water flow/ pressure dual control, automatic start/stop;
- High versatility, universal for both cold and hot water;
- Safe protection, dry–run and over–temperature protection;
- High efficiency and energy conservation, stable and long–lasting strong pressure.

Accessories & Package

- Carton Packing

AZB-600B INTELLIGENT SELF-PRIMING BOOSTER PUMP



Max. Power	0.74kW/1HP
Max. Flow	50L/min
Max. Lift	37m
Rated Power	0.6kW/0.8HP
Rated Lift	11.5m
Rated Flow	33L/min
Pipe Dia.	1"x1"
Suction	8m
Net Weight	9.1kg

Features

- Powerful boost, copper motor, strong power and rapid pressurization;
- Dual control, water flow/ pressure dual control, automatic start/stop;
- High versatility, universal for both cold and hot water;
- Safe protection, dry–run and over–temperature protection;
- High efficiency and energy conservation, stable and long–lasting strong pressure.

Accessories & Package

- Carton Packing

AZQB-370A PERIPHERAL PUMP



Max. Power	0.37kW/0.5HP
Max. Flow	26L/min
Max. Lift	19.5m
Rated Power	0.29kW/0.4HP
Rated Lift	7.6m
Rated Flow	17L/min
Pipe Dia.	1"x1"
Suction	8m
Net Weight	3.5kg

Features

- Copper wire motor; for Low temperature rise, high efficiency and strong power;
- Over–temperature protection, for stable running and good durability;
- Compact body, meeting different working scenarios;
- Copper impeller, for powerful suction and rapid water filling;
- Electrophoretic casting, anti–rust and corrosion–resistant, suitable for harsh environments.

Accessories & Package

- Carton Packing

AZQB-750A PERIPHERAL PUMP



Max. Power	0.72kW/0.9HP
Max. Flow	45L/min
Max. Lift	46m
Rated Power	0.55kW/0.75HP
Rated Lift	14.8m
Rated Flow	28L/min
Pipe Dia.	1"x1"
Suction	8m
Net Weight	7.7kg

Features

- Copper wire motor; for Low temperature rise, high efficiency and strong power;
- Over–temperature protection, for stable running and good durability;
- Compact body, meeting different working scenarios;
- Copper impeller, for powerful suction and rapid water filling;
- Electrophoretic casting, anti–rust and corrosion–resistant, suitable for harsh environments.

Accessories & Package

- Carton Packing

AZB-400B INTELLIGENT SELF-PRIMING BOOSTER PUMP



Max. Power	0.5kW/0.7HP
Max. Flow	38L/min
Max. Lift	34.5m
Rated Power	0.4kW/0.55HP
Rated Lift	12.6m
Rated Flow	22L/min
Pipe Dia.	1"x1"
Suction	8m
Net Weight	7.35kg

Features

- Powerful boost, copper motor, strong power and rapid pressurization;
- Dual control, water flow/ pressure dual control, automatic start/stop;
- High versatility, universal for both cold and hot water;
- Safe protection, dry–run and over–temperature protection;
- High efficiency and energy conservation, stable and long–lasting strong pressure.

Accessories & Package

- Carton Packing

AZB-800B INTELLIGENT SELF-PRIMING BOOSTER PUMP



Max. Power	0.83kW/1.1HP
Max. Flow	54L/min
Max. Lift	47.5m
Rated Power	0.8kW/1.1HP
Rated Lift	14.8m
Rated Flow	37L/min
Pipe Dia.	1"x1"
Suction	8m
Net Weight	9.65kg

Features

- Powerful boost, copper motor, strong power and rapid pressurization;
- Dual control, water flow/ pressure dual control, automatic start/stop;
- High versatility, universal for both cold and hot water;
- Safe protection, dry–run and over–temperature protection;
- High efficiency and energy conservation, stable and long–lasting strong pressure.

Accessories & Package

- Carton Packing

 *Specifications may differ from country to country.

POWERFUL BOOST INTELLIGENT CONTROL

COPPER MOTOR
Strong power and rapid pressurization

SAFE PROTECTION
Dry-run and over-temperature protection

DUAL CONTROL
Water flow/pressure dual control, automatic start/stop

HIGH VERSATILITY
Universal for both cold and hot water from 0~90°C



AZB-200B/400B/600B/800B

INTELLIGENT SELF-PRIMING BOOSTER PUMP

AJET-1.5 SELF-PRIMING JET PUMP



Max. Power	1.5kW/2HP
Max. Flow	66L/min
Max. Lift	48m
Rated Power	1kW/1.3HP
Rated Flow	42L/min
Rated Lift	28m
Pipe Dia.	1"x1"
Net Weight	15.24kg

Features

- All-copper motor, high speed and strong suction;
- Precision impeller, large water flow;
- Overload and overheating automatic protection;
- Hot and cold water common, safe and secure.

Accessories & Package

- Bottom Valve • One-inch Spout (1pcs) • O-ring (2pcs) • Carton Packing

AJET-750A SELF-PRIMING JET PUMP

NEW



Max. Power	0.9kW/1.2HP
Max. Flow	62L/min
Max. Lift	46m
Rated Power	0.75kW/1HP
Rated Flow	51.5L/min
Rated Lift	19.5m
Pipe Dia.	1"x1"
Net Weight	13.85kg

Features

- Strong power, copper motor, efficient and powerful;
- Multiple protections, over-load and over-temperature protection, ensure safe and long-term operation;
- Precision impeller, for strong suction and powerful pressurization;
- High versatility, universal for both cold and hot water.

Accessories & Package

- Carton Packing

AQDX1.5-17-0.37A SUBMERSIBLE PUMP

NEW



Max. Power	0.53kW/0.7HP
Max. Flow	100L/min
Max. Lift	16m
Rated Power	0.37kW/0.5HP
Rated Flow	25L/min
Rated Lift	15m
Pipe Dia.	1"
Net Weight	6.2kg

Features

- Strong power, copper motor, for high head and large flow rate;
- High efficiency and energy conservation, closed impeller structure, low energy consumption;
- High-precision rotor, for stable running and good durability;
- Multiple protections, with multiple protections such as overheat protection and float ball switch.

Accessories & Package

- Carton Packing

AQDX3-20-0.55A SUBMERSIBLE PUMP

NEW



Max. Power	0.85kW/1.1HP
Max. Flow	121L/min
Max. Lift	19.5m
Rated Power	0.55kW/0.75HP
Rated Flow	50L/min
Rated Lift	18.9m
Pipe Dia.	1"
Net Weight	8.95kg

Features

- Strong power, copper motor, for high head and large flow rate;
- High efficiency and energy conservation, closed impeller structure, low energy consumption;
- High-precision rotor, for stable running and good durability;
- Multiple protections, with multiple protections such as overheat protection and float ball switch.

Accessories & Package

- Carton Packing

AQDX1.5-32-0.75A SUBMERSIBLE PUMP

NEW



Max. Power	1.2kW/1.6HP
Max. Flow	116L/min
Max. Lift	29.5m
Rated Power	0.75kW/1HP
Rated Flow	25L/min
Rated Lift	28m
Pipe Dia.	1"
Net Weight	10.85kg

Features

- Strong power, copper motor, for high head and large flow rate;
- High efficiency and energy conservation, closed impeller structure, low energy consumption;
- High-precision rotor, for stable running and good durability;
- Multiple protections, with multiple protections such as overheat protection and float ball switch.

Accessories & Package

- Carton Packing

AQDX10-16-0.75A SUBMERSIBLE PUMP

NEW



Max. Power	1.3kW/1.7HP
Max. Flow	307L/min
Max. Lift	17.3m
Rated Power	0.75kW/1HP
Rated Flow	167L/min
Rated Lift	15.5m
Pipe Dia.	2"
Net Weight	10.85kg

Features

- Strong power, copper motor, for high head and large flow rate;
- High efficiency and energy conservation, closed impeller structure, low energy consumption;
- High-precision rotor, for stable running and good durability;
- Multiple protections, with multiple protections such as overheat protection and float ball switch.

Accessories & Package

- Carton Packing

AQDX3-35-1.1A SUBMERSIBLE PUMP

NEW



Max. Power	1.59kW/2.1HP
Max. Flow	120L/min
Max. Lift	36m
Rated Power	1.1kW/1.5HP
Rated Flow	50L/min
Rated Lift	34m
Pipe Dia.	1"
Net Weight	12.75kg

Features

- Strong power, copper motor, for high head and large flow rate;
- High efficiency and energy conservation, closed impeller structure, low energy consumption;
- High-precision rotor, for stable running and good durability;
- Multiple protections, with multiple protections such as overheat protection and float ball switch.

Accessories & Package

- Carton Packing

AQDX40-7-1.1A SUBMERSIBLE PUMP

NEW



Max. Power	1.6kW/2.1HP
Max. Flow	1030L/min
Max. Lift	11.5m
Rated Power	1.1kW/1.5HP
Rated Flow	667L/min
Rated Lift	6.5m
Pipe Dia.	3"
Net Weight	15.25kg

Features

- Strong power, copper motor, for high head and large flow rate;
- High efficiency and energy conservation, closed impeller structure, low energy consumption;
- High-precision rotor, for stable running and good durability;
- Multiple protections, with multiple protections such as overheat protection and float ball switch.

Accessories & Package

- Carton Packing

AWQD10-11-0.75A SEWAGE PUMP

NEW



Max. Power	1.18kW/1.6HP
Max. Flow	378L/min
Max. Lift	16m
Rated Power	0.75kW/1HP
Rated Flow	167L/min
Rated Lift	12m
Pipe Dia.	2"
Net Weight	18.15kg

Features

- Strong power, copper motor, efficient and powerful;
- Efficient sewage pumping, open impeller structure, accelerating the flow of sewage through;
- High-precision rotor, for stable running and good durability;
- Anti-rust and corrosion-resistant, stainless steel pump body, suitable for harsh environments;
- Safe protection, with multiple protections such as overheat protection and float ball switch.

Accessories & Package

- Carton Packing

AWQD15-10-1.1A SEWAGE PUMP

NEW



Max. Power	1.69kW/2.3HP
Max. Flow	426L/min
Max. Lift	15.8m
Rated Power	1.1kW/1.5HP
Rated Flow	250L/min
Rated Lift	11m
Pipe Dia.	2"
Net Weight	20.25kg

Features

- Strong power, copper motor, efficient and powerful;
- Efficient sewage pumping, open impeller structure, accelerating the flow of sewage through;
- High-precision rotor, for stable running and good durability;
- Anti-rust and corrosion-resistant, stainless steel pump body, suitable for harsh environments;
- Safe protection, with multiple protections such as overheat protection and float ball switch.

Accessories & Package

- Carton Packing

AWQD16-7-1.5DA SEWAGE PUMP

NEW



Max. Power	2.09kW/2.8HP
Max. Flow	470L/min
Max. Lift	15m
Rated Power	1.5kW/2HP
Rated Flow	267L/min
Rated Lift	11m
Pipe Dia.	2"
Net Weight	20.95kg

Features

- Strong power, copper motor, efficient and powerful;
- Efficient sewage pumping, open impeller structure, accelerating the flow of sewage through;
- High-precision rotor, for stable running and good durability;
- Anti-rust and corrosion-resistant, stainless steel pump body, suitable for harsh environments;
- Safe protection, with multiple protections such as overheat protection and float ball switch.

Accessories & Package

- Wooden Box Packing

AZB-300BL PM VFD SELF-PRIMING BOOSTER PUMP

NEW



Max. Power	300W
Max. Flow	3m²/h
Max. Lift	30m
Rated Power	220W
Rated Flow	1.8m²/h
Rated Lift	15m
Suction	3m
Net Weight	4.69kg

Features

- VFD constant pressure, maintaining a constant water outlet pressure and automatic adjustment;
- Safe protection, water shortage, water leakage and high/low temperature alarms;
- Automatic start/stop, automatic pressure increase and shutdown;
- High versatility, universal for both cold and hot water;
- Exquisite and compact, small in size, saving space and easy installing.

Accessories & Package

- Carton Packing

APXH-100A CANNED PUMP

NEW



Max. Power	100W
Max. Flow	25L/m
Max. Lift	8.5m
Net Weight	2.35kg

Features

- Powerful circulation, copper motor delivers strong output for fast water circulation;
- Easy Speed Adjustment, flexible gear tuning for effortless operation;
- Low-frequency running, shielded mute design for quiet operation;
- Automatic start/ stop;
- Multi-speed control, manual/ one-click auto shift to suit varying water needs.

Accessories & Package

- 3/4" to 1/2" Copper-Plated Iron Reducing Adapter × 2 • nut × 2 • gasket × 2
- Carton Packing

A03YD40 PETROL CHAIN SAW



Power	2-Stroke Air Cooling
Displacement	39.6cc
Max. Power	1.5kW
Max. Speed	11000/min
Blade Length	16"
Pitch	3/8
Net Weight	4.3kg

Features

- 1.5kW Max. power output, smooth cutting with high efficiency;
- High-quality carburetor, reducing fuel consumption and emissions;
- Automatic oil pump system, effectively extending the lifetime of the chain.

Accessories & Package

- Saw Chain • Guide Bar • Bar Protector • Fuel Ratio Oiler • Tool Kit
- Paper Pad for Oil Outlet Cover • Brake Assembly • Carton Packing

A03YD54 PETROL CHAIN SAW



Power	2-Stroke Air Cooling
Displacement	54cc
Max. Power	2.2kW
Max. Speed	11000/min
Blade Length	20"
Pitch	3/8
Net Weight	5.1kg

Features

- 2.2kW Max. output power, smooth cutting with high efficiency;
- Diaphragm carburetor, reducing fuel consumption and emissions;
- Automatic oil pump system, effectively extending the lifetime of the chain;
- Safety braking system, preventing accidental cutting, safe and reliable.

Accessories & Package

- Saw Chain • Guide Bar • Bar Protector • Fuel Ratio Oiler • Tool Kit
- Paper Pad for Oil Outlet Cover • Brake Assembly • Carton Packing

AQYD55-01 PETROL CHAIN SAW

NEW



Power	2-Stroke Air Cooling
Displacement	54.6cc
Max. Power	2.2kW
Max. Speed	11000/min
Blade Length	20"
Pitch	0.325
Net Weight	4.9kg

Features

- 2.2kW Max. output power, smooth cutting with high efficiency;
- Diaphragm carburetor, reducing fuel consumption and emissions;
- Automatic oil pump system, effectively extending the lifetime of the chain;
- Safety braking system, preventing accidental cutting, safe and reliable.

Accessories & Package

- Saw Chain • Guide Bar • Bar Protector • Fuel Ratio Oiler • Carton Packing
- Tool Bag (Inserted Wooden Ruler, Screw, Socket Wrench, Screwdriver, Hex Wrench*2)

A03YD58 PETROL CHAIN SAW



Power	2-Stroke Air Cooling
Displacement	54.5cc
Max. Power	2.6kW
Max. Speed	12500/min
Blade Length	20"
Pitch	3/8
Net Weight	5.1kg

Features

- 2.6kW Max. power output,smooth cutting with high efficiency;
- High-quality carburetor, reducing fuel consumption and emissions;
- Automatic oil pump system, effectively extending the lifetime of the chain.

Accessories & Package

- Saw Chain - Guide Bar - Bar Protector - Fuel Ratio Oiler - Tool Kit
- Paper Pad for Oil Outlet Cover - Brake Assembly - Carton Packing

AQEB756-02 PETROL BLOWER



Power	4-Stroke Air Cooling
Displacement	75.6cc
Max. Power	2.6kW
Max. Speed	7000/min
Max. Air Volume	1440m³/h
Max Wind Speed	82m/s
Net Weight	11kg

Features

- Automotive-grade paper air filter, excellent air filtration;
- 75.6cc 4-stroke engine, powerful and strong airflow;
- Multi-point shock absorption, lower back vibration;
- Cruise control throttle, relieve finger fatigue;
- Curved nozzle for concentrated airflow.

Accessories & Package

- Blowing Nozzle - Tool Kit - Funnel - Carton Packing

AQCG427-01 PETROL BRUSH CUTTER



Power	2-Stroke Air Cooling
Displacement	42.7cc
Max. Power	1.25kW
Max. Speed	9300/min
Blade Diameter	305mm
Nylon Cutting Range	430mm
Net Weight	6.8kg

Features

- 2-stroke engine, simple structure and high power;
- Paper air filter delivers excellent air filtration performance;
- Throttle trigger with safety control arm prevents misoperation for safer use;
- 1.5mm thick aluminum operating shaft, lighter and more durable;
- High-quality gearbox, low noise and long service life.

Accessories & Package

- Blade Protector - Tool Kit - Shoulder Strap - Handle - Fuel Ratio Oiler - Blade
- Trimmer Head - Carton Packing

AQCG517-01 PETROL BRUSH CUTTER



Power	2-Stroke Air Cooling
Displacement	51.7cc
Max. Power	1.47kW
Max. Speed	10000/min
Nylon Cutting Range	420mm
Blade Diameter	255mm
Net Weight	7.09kg

Features

- Max. 1.47kW power output, powerful and efficient;
- High-quality carburetor, reducing fuel consumption and emissions;
- Ergonomic handle, for comfortable grip.

Accessories & Package

- Blade - Rope Sheave - Shoulder Strap - Fuel Ratio Oiler - Funnel - Strainer Mesh
- Socket Wrench - Hex Wrench (2pcs) - Open-end Wrench - Carton Packing

AQEB633-02 PETROL BLOWER



Power	2-Stroke Air Cooling
Displacement	63.3cc
Max. Power	2.7kW
Max. Speed	7000/min
Max. Air Volume	960m³/h
Max Wind Speed	88m/s
Net Weight	9.1kg

Features

- Dual-layer air filter, better air filtration;
- 63cc 2-stroke engine, powerful and strong airflow;
- Multi-point shock absorption, lower back vibration;
- Cruise control throttle, relieve finger fatigue;
- Curved nozzle for concentrated airflow.

Accessories & Package

- Fuel Ratio Oiler - Blowing Nozzle - Tool Kit - Carton Packing

AQCG310-01 PETROL BRUSH CUTTER



Power	4-Stroke Air Cooling
Displacement	31cc
Max. Power	0.8kW
Max. Speed	9300/min
Blade Diameter	305mm
Nylon Cutting Range	430mm
Net Weight	7.0kg

Features

- 4-stroke engine, no fuel mixing required for higher convenience;
- Split-type cylinder, higher power output and easier after-sales service;
- 1.5mm thick aluminum operating shaft, lighter and more durable;
- Cruise control throttle reduces finger holding fatigue;
- High-quality gearbox, low noise and long service life.

Accessories & Package

- Blade Protector - Tool Kit - Shoulder Strap - Handle - Measuring Glass - Blade
- Trimmer Head - Carton Packing

AQCG427-02 PETROL BRUSH CUTTER



Power	2-Stroke Air Cooling
Displacement	42.7cc
Max. Power	1.25kW
Max. Speed	10000/min
Nylon Cutting Range	420mm
Blade Diameter	255mm
Net Weight	7.0kg

Features

- Max. 1.25kW power output, powerful and efficient;
- High-quality carburetor, reducing fuel consumption and emissions;
- Ergonomic handle, for comfortable grip.

Accessories & Package

- Blade - Rope Sheave - Shoulder Strap - Fuel Ratio Oiler - Funnel - Strainer Mesh
- Socket Wrench - Hex Wrench (2pcs) - Open-end Wrench - Carton Packing

AQBG310-01 PETROL BRUSH CUTTER



Power	4-Stroke Air Cooling
Displacement	31cc
Max. Power	0.8kW
Max. Speed	9300/min
Blade Diameter	305mm
Nylon Cutting Range	430mm
Net Weight	9.5kg

Features

- 4-stroke engine, no fuel mixing, more convenient;
- Split-type cylinder, higher power & easy after-sales service;
- Three-point shock absorption, less back vibration;
- Cruise control throttle, relieve finger fatigue;
- High-quality gearbox, low noise & long lifespan.

Accessories & Package

- Blade Protector - Tool Kit - Auxiliary Handle - Measuring Glass - Blade
- Trimmer Head - Carton Packing

 *Specifications may differ from country to country.



AF800 GASOLINE GENERATOR

NEW



RATED OUTPUT POWER 650W
Max OUTPUT POWER 800W

COMPACT AND LIGHTWEIGHT

2 STROKE ENGINE

Gasoline

Rated Voltage(V)	110-240
Frequency(Hz)	50/60
Max. Power(kW)	0.8
Rated Power(kW)	0.65
Engine Type	Single-Cylinder/2 Stroke/Air-Cooled
Displacement(cc)	63
Start Method	Recoil
Fuel Tank Capacity(L)	4
Oil Capacity(L)	/
Continuous Working Time @75%load(h)	/
Weight(kg)	16

Accessories & Package

- Oil Funnel • Tool Kit Bag
- Carton Packing



Oil Funnel



Tool Kit Bag

AF3600/AF3600E GASOLINE GENERATOR



RATED OUTPUT POWER 2.8kW

DOUBLE SAFETY PROTECTION
Overload protection and low oil Auto-shutdown

OHV (OVERHEAD VALVE) ENGINE
Fuel-efficient and built for long-lasting durability

AF3600: Recoil Start
AF3600E: Recoil & Electric Start

4 Stroke Engine Gasoline Copper-Wound Motor

Rated Voltage(V)	110-240
Frequency(Hz)	50/60
Max. Power(kW)	3.0
Rated Power(kW)	2.8
Engine Type	Single-Cylinder/4 Stroke/OHV 25°/Air-Cooled
Displacement(cc)	212
Start Method	Recoil/Recoil&Electric
Fuel Tank Capacity(L)	15
Oil Capacity(L)	0.6
Continuous Working Time @75%load(h)	11
Weight(kg)	45

Accessories & Package

- Oil Funnel • Plug • Tool Kit Bag
- Carton Packing



Oil Funnel



Plug



Tool Kit Bag

*Specifications may differ from country to country.

AF3600B/AF3600BE GASOLINE GENERATOR

NEW



RATED OUTPUT POWER 2.5kW

DOUBLE SAFETY PROTECTION
Overload protection and low oil Auto-shutdown

OHV (OVERHEAD VALVE) ENGINE
Fuel-efficient and built for long-lasting durability

AF3600B: Recoil Start
AF3600BE: Recoil & Electric Start

4 Stroke Engine Gasoline

Rated Voltage(V)	110-240
Frequency(Hz)	50/60
Max. Power(kW)	2.8
Rated Power(kW)	2.5
Engine Type	Single-Cylinder/4 Stroke/OHV 25°/Air-Cooled
Displacement(cc)	212
Start Method	Recoil/Recoil&Electric
Fuel Tank Capacity(L)	15
Oil Capacity(L)	0.6
Continuous Working Time @75%load(h)	11
Weight(kg)	38.5

Accessories & Package

- Oil Funnel • Plug • Tool Kit Bag
- Carton Packing



Oil Funnel



Plug



Tool Kit Bag

AF6500/AF6500E GASOLINE GENERATOR



RATED OUTPUT POWER 5kW

DOUBLE SAFETY PROTECTION
Overload protection and low oil Auto-shutdown

OHV (OVERHEAD VALVE) ENGINE
Fuel-efficient and built for long-lasting durability

AF6500: Recoil Start
AF6500E: Recoil & Electric Start

4 Stroke Engine Gasoline Copper-Wound Motor

Rated Voltage(V)	110-240
Frequency(Hz)	50/60
Max. Power(kW)	5.5
Rated Power(kW)	5.0
Engine Type	Single-Cylinder/4 Stroke/OHV 25°/Air-Cooled
Displacement(cc)	420
Start Method	Recoil/Recoil&Electric
Fuel Tank Capacity(L)	25
Oil Capacity(L)	1.1
Continuous Working Time @75%load(h)	8
Weight(kg)	73

Accessories & Package

- Oil Funnel • Plug (2pcs) • Tool Kit Bag
- Carton Packing



Oil Funnel



Plug(2pcs)



Tool Kit Bag

AF6500B/AF6500BE GASOLINE GENERATOR



AF6500B: Recoil Start
AF6500BE: Recoil & Electric Start

4 Stroke Engine | Gasoline

Rated Voltage(V)	110-240
Frequency(Hz)	50/60
Max. Power(kW)	5.0
Rated Power(kW)	4.8
Engine Type	Single-Cylinder/4 Stroke/OHV 25°/Air-Cooled
Displacement(cc)	420
Start Method	Recoil/Recoil&Electric
Fuel Tank Capacity(L)	25
Oil Capacity(L)	1.1
Continuous Working Time @75%load(h)	8
Weight(kg)	68.5

RATED OUTPUT POWER 5kW

DOUBLE SAFETY PROTECTION
Overload protection and low oil Auto-shutdown

OHV (OVERHEAD VALVE) ENGINE
Fuel-efficient and built for long-lasting durability

Accessories & Package

- Oil Funnel • Plug (2pcs) • Tool Kit Bag
- Carton Packing


Oil Funnel


Plug(2pcs)


Tool Kit Bag

AF7500/AF7500E GASOLINE GENERATOR



AF7500: Recoil Start
AF7500E: Recoil & Electric Start

4 Stroke Engine | Gasoline | Copper-Wound Motor

Rated Voltage(V)	110-240
Frequency(Hz)	50/60
Max. Power(kW)	6.5
Rated Power(kW)	6.0
Engine Type	Single-Cylinder/4 Stroke/OHV 25°/Air-Cooled
Displacement(cc)	420
Start Method	Recoil/Recoil&Electric
Fuel Tank Capacity(L)	25
Oil Capacity(L)	1.1
Continuous Working Time @75%load(h)	8
Weight(kg)	76

RATED OUTPUT POWER 6kW

DOUBLE SAFETY PROTECTION
Overload protection and low oil Auto-shutdown

OHV (OVERHEAD VALVE) ENGINE
Fuel-efficient and built for long-lasting durability

Accessories & Package

- Oil Funnel • Plug (2pcs) • Tool Kit Bag • Handle Assembly (2pcs)
- Wheel Assembly (2pcs) • Support Assembly (2pcs)
- Carton Packing


Oil Funnel


Plug(2pcs)


Tool Kit Bag

 *Specifications may differ from country to country.

AF9500E/9500DSE GASOLINE GENERATOR



4 Stroke Engine | Gasoline | Copper-Wound Motor | Electric Start

Rated Voltage(V)	110-240/110-240/380-400
Frequency(Hz)	50/60
Max. Power(kW)	7.5
Rated Power(kW)	7.0
Engine Type	Single-Cylinder/4 Stroke/OHV 25°/Air-Cooled
Displacement(cc)	438
Start Method	Recoil+Electric
Fuel Tank Capacity(L)	25
Oil Capacity(L)	1.2
Continuous Working Time @75%load(h)	7
Weight(kg)	89/94

RATED OUTPUT POWER 7kW

REMOVABLE HANDLE
Comfortable to hold

OHV (OVERHEAD VALVE) ENGINE
Fuel-efficient and built for long-lasting durability

Accessories & Package

- Oil Funnel • Plug (2pcs) • Tool Kit Bag • Handle Assembly (2pcs)
- Wheel Assembly (2pcs) • Support Assembly (2pcs)
- Carton Packing


Oil Funnel


Plug(2pcs)


Tool Kit Bag

AF12800DSE GASOLINE GENERATOR



4 Stroke Engine | Gasoline | Copper-Wound Motor | Electric Start

Rated Voltage(V)	110-240/380-400
Frequency(Hz)	50/60
Max. Power(kW)	10.5
Rated Power(kW)	10.0
Engine Type	Single-Cylinder/4 Stroke/OHV 25°/Air-Cooled
Displacement(cc)	550
Start Method	Recoil+Electric
Fuel Tank Capacity(L)	40
Oil Capacity(L)	1.2
Continuous Working Time @75%load(h)	/
Weight(kg)	114

RATED OUTPUT POWER 10kW

3-IN-1 DIGITAL DISPLAY METER FOR CLEAR
At-a-glance output monitoring

TROUBLESHOOTING IS SIMPLE AND CONVENIENT
Equipped with indicator lights for low oil, overload, and normal operation

Accessories & Package

- Oil Funnel • Plug (2pcs) • Tool Kit Bag • Handle Assembly (2pcs)
- Wheel Assembly (2pcs) • Support Assembly (2pcs)
- Carton Packing


Oil Funnel


Plug(2pcs)


Tool Kit Bag

AF3750ik — OPEN FRAME INVERTER GASOLINE GENERATOR



RATED OUTPUT POWER 2.8kW

INVERTER TECHNOLOGY
Providing clean power output for sensitive electronics

LOW NIOSE
Only 73 dB(A)from 7m away under 50% load

4 Stroke Engine | Gasoline | Copper-Wound Motor

Rated Voltage(V)	110-240
Frequency(Hz)	50/60
Max. Power(kW)	3.0
Rated Power(kW)	2.8
Engine Type	Single-Cylinder/4 Stroke/OHV 25°/Air-Cooled
Displacement(cc)	208
Start Method	Recoil
Fuel Tank Capacity(L)	5
Oil Capacity(L)	0.6
THD(%)	≤3
Continuous Working Time @75%load(h)	5
Weight(kg)	23

Accessories & Package
- Oil Funnel • Tool Kit Bag
- Carton Packing


Oil Funnel


Tool Kit Bag

AF4500ikB — OPEN FRAME INVERTER GASOLINE GENERATOR



RATED OUTPUT POWER 3.5kW

INVERTER TECHNOLOGY
Providing clean power output for sensitive electronics


LOW NIOSE
Only 73 dB(A)from 7m away under 50% load

4 Stroke Engine | Gasoline | Copper-Wound Motor

Rated Voltage(V)	110-240
Frequency(Hz)	50/60
Max. Power(kW)	3.8
Rated Power(kW)	3.5
Engine Type	Single-Cylinder/4 Stroke/OHV 25°/Air-Cooled
Displacement(cc)	223
Start Method	Recoil
Fuel Tank Capacity(L)	7.5
Oil Capacity(L)	0.6
THD(%)	≤3
Continuous Working Time @75%load(h)	5.5
Weight(kg)	26

Accessories & Package
- Oil Funnel • Tool Kit Bag
- Carton Packing


Oil Funnel


Tool Kit Bag

*Specifications may differ from country to country.

AF5500ik — OPEN FRAME INVERTER GASOLINE GENERATOR



RATED OUTPUT POWER 4.5kW

INVERTER TECHNOLOGY
Providing clean power output for sensitive electronics

3-IN-1 DIGITAL DISPLAY METER FOR CLEAR
At-a-glance output monitoring

4 Stroke Engine | Gasoline | Copper-Wound Motor

Rated Voltage(V)	110-240
Frequency(Hz)	50/60
Max. Power(kW)	5.0
Rated Power(kW)	4.5
Engine Type	Single-Cylinder/4 Stroke/OHV 25°/Air-Cooled
Displacement(cc)	236
Start Method	Recoil
Fuel Tank Capacity(L)	10
Oil Capacity(L)	0.6
THD(%)	≤3
Continuous Working Time @75%load(h)	/
Weight(kg)	27

Accessories & Package
- Oil Funnel • Plug • Tool Kit Bag
- Carton Packing


Oil Funnel


Plug


Tool Kit Bag

AF7500ik — OPEN FRAME INVERTER GASOLINE GENERATOR



RATED OUTPUT POWER 5.2kW

INVERTER TECHNOLOGY
Providing clean power output for sensitive electronics

3-IN-1 DIGITAL DISPLAY METER FOR CLEAR
At-a-glance output monitoring

4 Stroke Engine | Gasoline | Copper-Wound Motor

Rated Voltage(V)	110-240
Frequency(Hz)	50/60
Max. Power(kW)	5.5
Rated Power(kW)	5.2
Engine Type	Single-Cylinder/4 Stroke/OHV 25°/Air-Cooled
Displacement(cc)	275
Start Method	Recoil
Fuel Tank Capacity(L)	10
Oil Capacity(L)	0.6
THD(%)	≤3
Continuous Working Time @75%load(h)	/
Weight(kg)	36

Accessories & Package
- Oil Funnel • Plug • Tool Kit Bag
- Carton Packing


Oil Funnel


Plug


Tool Kit Bag

AF9000DSEik | OPEN FRAME INVERTER GASOLINE GENERATOR



RATED OUTPUT POWER 7kW

INVERTER TECHNOLOGY
Providing clean power output for sensitive electronics

ECO MODE
Saves fuel under low-load conditions

4 Stroke Engine | Gasoline | Copper-Wound Motor

Rated Voltage(V)	110-240/380-400
Frequency(Hz)	50/60
Max. Power(kW)	7.5
Rated Power(kW)	7
Engine Type	Single-Cylinder/4 Stroke/OHV 25°/Air-Cooled
Displacement(cc)	420
Start Method	Recoil+Electric
Fuel Tank Capacity(L)	25
Oil Capacity(L)	1.1
THD(%)	≤3
Continuous Working Time @75%load(h)	/
Weight(kg)	63

Accessories & Package

- Oil Funnel • Plug (2pcs) • Tool Kit Bag • Handle Assembly (2pcs)
- Wheel Assembly (2pcs) • Support Assembly (2pcs)
- Carton Packing


Oil Funnel


Plug(2pcs)


Tool Kit Bag

AF11000DSEik | OPEN FRAME INVERTER GASOLINE GENERATOR



RATED OUTPUT POWER 8kW

INVERTER TECHNOLOGY
Providing clean power output for sensitive electronics

ECO MODE
Saves fuel under low-load conditions

4 Stroke Engine | Gasoline | Copper-Wound Motor

Rated Voltage(V)	110-240/380-400
Frequency(Hz)	50/60
Max. Power(kW)	8.5
Rated Power(kW)	8
Engine Type	Single-Cylinder/4 Stroke/OHV 25°/Air-Cooled
Displacement(cc)	458
Start Method	Recoil+Electric
Fuel Tank Capacity(L)	25
Oil Capacity(L)	1.2
THD(%)	≤3
Continuous Working Time @75%load(h)	/
Weight(kg)	67

Accessories & Package

- Oil Funnel • Plug (2pcs) • Tool Kit Bag • Handle Assembly (2pcs)
- Wheel Assembly (2pcs) • Support Assembly (2pcs)
- Carton Packing


Oil Funnel


Plug(2pcs)


Tool Kit Bag

*Specifications may differ from country to country.

AF6700E | DIESEL GENERATOR



RATED OUTPUT POWER 4.5kW

FUEL SAVER, BUILT TO LAST

PROVIDING RELIABLE, UNINTERRUPTED POWER

4 Stroke Engine | Diesel | Copper-Wound Motor | Electric Start

Rated Voltage(V)	110-240
Frequency(Hz)	50/60
Max. Power(kW)	5
Rated Power(kW)	4.5
DC Output	\
Engine Type	Single-Cylinder/4 Stroke/Air-Cooled Vertical
Displacement(cc)	418
Power Factor	1
Start Method	Electric
Fuel Tank Capacity(L)	12.5
Oil Capacity(L)	1.65
Engine Power (kW)	5.8
Weight(kg)	113

Accessories & Package

- Oil Funnel • Plug (2pcs) • Tool Kit Bag
- Carton Packing


Oil Funnel


Plug(2pcs)


Tool Kit Bag

AF6700SE | SILENT DIESEL GENERATOR



RATED OUTPUT POWER 4.5kW

LOW NIOSE
Only 73 dB(A)from 7m away under 50% load

PROVIDING RELIABLE, UNINTERRUPTED POWER

4 Stroke Engine | Diesel | Copper-Wound Motor | Electric Start


Rated Voltage(V)	110-240
Frequency(Hz)	50/60
Max. Power(kW)	5
Rated Power(kW)	4.5
DC Output	12V, 8.3A
Engine Type	Single-Cylinder/4 Stroke/Air-Cooled Vertical
Displacement(cc)	418
Power Factor	1
Start Method	Electric
Fuel Tank Capacity(L)	14.5
Oil Capacity(L)	1.65
Engine Power (kW)	5.8
Weight(kg)	149

Accessories & Package

- Oil Funnel • Plug (2pcs) • Tool Kit Bag • Wheel Assembly*4
- Carton Packing


Oil Funnel


Plug(2pcs)


Tool Kit Bag